



SHELTER TYPE 1 - RAIL LINE STATION PASSENGER SHELTER




SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER



SHELTER TYPE 3 - ON-STREET BUS PASSENGER SHELTER



SHELTER TYPE 4 - SMALL BIKE SHELTER

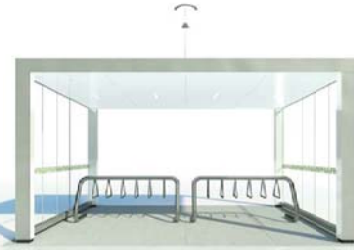

SHELTER TYPE 5 - LARGE BIKE SHELTER



SHELTER TYPE 6 - AMENITIES SHELTER



*ARCHITECTURAL SHEET LIST*		
SHEET NUMBER	SHELTER TYPE	SHEET NAME
A1.0	SHELTER TYPE 1 - RAIL LINE STATIONS PASSENGER SHELTER	3D ISOMETRIC VIEWS
A1.1	SHELTER TYPE 1 - RAIL LINE STATIONS PASSENGER SHELTER	PLANS
A1.2	SHELTER TYPE 1 - RAIL LINE STATIONS PASSENGER SHELTER	ELEVATIONS
A1.3	SHELTER TYPE 1 - RAIL LINE STATIONS PASSENGER SHELTER	SECTIONS
A2.0a	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	3D ISOMETRIC VIEWS
A2.0b	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	3D STRUCTURAL ISOMETRIC VIEWS
A2.1	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	PLANS
A2.2	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	REFLECTED CEILING PLAN
A2.3	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	ELEVATIONS
A2.4	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	SECTIONS
A2.5	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	SECTIONS
A3.0	SHELTER TYPE 3 - ON-STREET BUS PASSENGER SHELTER	3D ISOMETRIC VIEWS
A3.1	SHELTER TYPE 3 - ON-STREET BUS PASSENGER SHELTER	PLANS AND SECTIONS
A3.2	SHELTER TYPE 3 - ON-STREET BUS PASSENGER SHELTER	ELEVATIONS
A4.0	SHELTER TYPE 4 - SMALL BIKE SHELTER	3D ISOMETRIC VIEWS
A4.1	SHELTER TYPE 4 - SMALL BIKE SHELTER	PLANS
A4.2	SHELTER TYPE 4 - SMALL BIKE SHELTER	ELEVATIONS AND SECTIONS
A5.0	SHELTER TYPE 5 - LARGE BIKE SHELTER	3D ISOMETRIC VIEWS
A5.1	SHELTER TYPE 5 - LARGE BIKE SHELTER	PLANS
A5.2	SHELTER TYPE 5 - LARGE BIKE SHELTER	ELEVATIONS AND SECTIONS
A6.0	SHELTER TYPE 6 - AMENITIES SHELTER	3D ISOMETRIC VIEWS
A6.1	SHELTER TYPE 6 - AMENITIES SHELTER	PLANS, ELEVATIONS, AND SECTIONS
A8.1	GENERAL	ROOF AND GLAZING DETAILS
A8.2	GENERAL	INFO / SERVICE WALL A DETAILS
A8.3	GENERAL	INFO / SERVICE WALL B DETAILS
A8.4	GENERAL	ADDITIONAL INFO / SERVICE WALL DETAILS
A8.5	GENERAL	DOOR FRAME DETAILS
A8.6	GENERAL	SWING GUARD AND OPEN FRAME DETAILS
A8.7	GENERAL	FURNISHINGS DETAILS

*ELECTRICAL SHEET LIST*		
SHEET NUMBER	SHELTER TYPE	SHEET NAME
ED.1	GENERAL	ELECTRICAL SYMBOLS LEGEND
ED.2	GENERAL	ELECTRICAL INTERCONNECTION DIAGRAM
E1.1	SHELTER TYPE 1 - RAIL LINE STATIONS PASSENGER SHELTER	POWER AND LIGHTING PLANS
E2.1	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	POWER AND LIGHTING PLANS
E2.2	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	HEAT TRACE PLAN
E3.1	SHELTER TYPE 3 - ON-STREET BUS PASSENGER SHELTER	POWER AND LIGHTING PLANS
E4.1	SHELTER TYPE 4 - SMALL BIKE SHELTER	POWER AND LIGHTING PLANS
E5.1	SHELTER TYPE 5 - LARGE BIKE SHELTER	POWER AND LIGHTING PLANS
E6.1	SHELTER TYPE 6 - AMENITIES SHELTER	POWER AND LIGHTING PLANS

*STRUCTURAL SHEET LIST*		
SHEET NUMBER	SHELTER TYPE	SHEET NAME
S0.1	GENERAL	GENERAL NOTES AND DRAWING LIST
S1.1	SHELTER TYPE 1 - RAIL LINE STATIONS PASSENGER SHELTER	PLANS AND DETAILS
S2.1	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	PLANS
S2.2	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	DETAILS
S3.1	SHELTER TYPE 3 - ON-STREET BUS PASSENGER SHELTER	PLANS AND DETAILS
S4.1	SHELTER TYPE 4 - SMALL BIKE SHELTER	PLANS AND DETAILS
S5.1	SHELTER TYPE 5 - LARGE BIKE SHELTER	PLANS AND DETAILS
S6.1	SHELTER TYPE 6 - AMENITIES SHELTER	PLANS AND DETAILS

MASTER KEYNOTE LIST	
KEY VALUE	DESCRIPTION
03 30 00	CAST-IN-PLACE CONCRETE
03 30 20	SAVED/STIFF CONCRETE FINISHING
05 14 00	STRUCTURAL ALUMINUM FRAMING
05 14 13	ARCHITECTURALLY-EXPOSED STRUCTURAL ALUMINUM FRAMING
05 10 00.01	STEEL ROOF SCORING
05 50 00.00	ALUMINUM SHEET
05 50 00.01	3mm ALUMINUM PLATE
05 50 00.02	5mm ALUMINUM PLATE
05 50 00.03	6-8mm ALUMINUM PLATE
05 50 00.04	ALUMINUM EXTRUSION
05 50 00.05	ALUMINUM FINISHING
05 50 00.07	3mm PERFORATED ALUMINUM PLATE
05 50 00.08	BENCH SEATS
05 50 00.01	PVC DOWNWATER LEADER
05 50 00.02	PVC DOWNWATER LEADER CLEANOUT
05 50 00.03	13mm WHITE CORIAN
05 50 00.04	ALUMINUM WIRE SYMBOL
05 50 00.05	ALUMINUM GUTTER
05 50 00.01	ALUMINUM STUB SHAFT CONNECTION
07 42 41.01	ALUMINUM CEILING PANELS
07 54 20.01	PVC MEMBRANE ROOF OR 20mm PLYWOOD DECK
07 54 20.02	PVC MEMBRANE ROOF OR 13mm SHEATHING BOARD
08 56 88.01	CUSTOM ALUMINUM GLAZING SINE
08 56 88.02	RECESSED GLAZING HEAD CHANNEL
08 56 88.03	GLAZING SUPPORT AND LEVELLING BOLTS
08 71 13.01	AUTOMATIC DOOR OPERATOR
08 71 13.02	AUTOMATIC DOOR OPERATOR BUTTON
08 80 00.01	RETRACTION DECAL
08 80 00.02	AUTOMATIC DOOR SEN
08 80 00.03	PUSH/PULL LEGAL (DOOR)
08 80 00.01	10MM CLEAR TEMPERED GLASS WITH PYROLYTIC LOW-E COATING
08 80 00.02	10MM CLEAR TEMPERED GLASS
08 80 00.03	6MM CLEAR LOW-IRON TEMPERED GLASS
08 80 00.03.2	6MM LOW-IRON TEMPERED GLASS WITH WHITE CERAMIC ON BACK
23 10 00.01	RADIANT HEATED FLOORS - ELECTRIC
23 10 00.02	HEATER CONTROL BUTTON
26 05 31.01	JUNCTION BOX
26 09 24.01	PHOTOCELL DAYLIGHTING SENSOR
26 27 26.01	LED SCREEN
26 27 26.02	LED LIGHT PANEL
26 27 26.03	OFFER RECEPTACLE
26 27 26.04	USB CHARGING RECEPTACLE
26 50 00.01	RECESSED LED LINEAR LIGHT FIXTURE
27 51 16.01	PUBLIC ADDRESS SPEAKER
27 53 25.01	TRIMMABLE COMMUNICATION DEVICE
28 20 00.01	OUTDOOR CCTV CAMERA

DOORS SCHEDULE								
DOOR NO.	Type	Location	DOOR			Door Material	Door Finish	Comments
			Width	Height	Thickness			
D1	Shelter Door - Glass	Shelter Type 1	1975	2300	47.6	Aluminum	Coating, as per drawings	
D2	Shelter Door - Glass	Shelter Type 1	1975	2300	47.6	Aluminum	Coating, as per drawings	
D3	Shelter Door - Glass	Shelter Type 2	1975	2300	47.6	Aluminum	Coating, as per drawings	
D4	Shelter Door - Glass	Shelter Type 2	1975	2300	47.6	Aluminum	Coating, as per drawings	
D001	Interior B Entry Access Door	Shelter Type 1	1335.6	1943	85.2	Aluminum	As per drawings	
D002	Interior B Entry Access Door	Shelter Type 2	1335.6	1943	85.2	Aluminum	As per drawings	
D003	Interior B Entry Access Door	Shelter Type 3	1335.6	1943	85.2	Aluminum	As per drawings	
D004	Interior B Entry Access Door	Shelter Type 4	1335.6	1943	85.2	Aluminum	As per drawings	
D005	Interior B Entry Access Door	Shelter Type 5	1335.6	1943	85.2	Aluminum	As per drawings	Optional
D006	Interior B Entry Access Door	Shelter Type 6	1335.6	1943	85.2	Aluminum	As per drawings	Optional
D007	Interior B Entry Access Door	Shelter Type 1	1335.6	1943	85.2	Aluminum	As per drawings	Optional
D008	Interior B Entry Access Door	Shelter Type 2	1335.6	1943	85.2	Aluminum	As per drawings	Optional
D009	Interior B Entry Access Door	Shelter Type 3	1335.6	1943	85.2	Aluminum	As per drawings	Optional
D010	Interior B Entry Access Door	Shelter Type 4	1335.6	1943	85.2	Aluminum	As per drawings	Optional
D011	Interior B Entry Access Door	Shelter Type 5	1335.6	1943	85.2	Aluminum	As per drawings	Optional
D012	Interior B Entry Access Door	Shelter Type 6	1335.6	1943	85.2	Aluminum	As per drawings	Optional

LIGHTING FIXTURES LEGEND				
Value	Type - Length	Comments	Count / Keynote	
L1	RECESSED LINEAR LED - 640 mm	Shelter Type 1	1	05 50 00.01
L2	RECESSED LINEAR LED - 965.5 mm	Shelter Type 2	10	05 50 00.01
L3	RECESSED LINEAR LED - 458.5 mm	Shelter Type 4	4	05 50 00.01
L4	RECESSED LINEAR LED - 583.5 mm	Shelter Type 5	4	05 50 00.01
L5	RECESSED LINEAR LED - 583.5 mm	Shelter Type 6	6	05 50 00.01

GLAZING LEGEND	
Tag	Description
G1	10mm Clear Glass with Low-E Coating
G2	10mm Clear Glass
G3	6mm Low-iron Glass
G4	10mm Clear Glass with Low-E Coating

COATINGS LEGEND	
Tag	Description
P1	Paint: Silver Gray, Matte
P2	Paint: White, Glossy
P3	Paint: Dark Gray, Matte

GENERAL NOTES:  
1. Drawings are not to be specific Contractor shall verify all building conditions and dimensions required to perform the Work and all work is to be done in accordance with the Contract Documents and the applicable building codes.  
2. The Architectural Drawings are to be used in conjunction with all other Contract Documents including the Project Manuals and the General and Special Conditions. In case of a discrepancy between the Contract Documents all requests for quantity, dates or scope of work, the greater shall prevail.  
3. The Contractor shall be responsible for obtaining all permits and licenses and for obtaining all necessary approvals from the local authorities. The Contractor shall be responsible for obtaining all necessary approvals from the local authorities.  
4. The Contractor shall be responsible for obtaining all necessary approvals from the local authorities.  
5. The Contractor shall be responsible for obtaining all necessary approvals from the local authorities.  
6. These documents are not to be used for construction unless specifically noted for such purpose.

METRIC  
ALL DIMENSIONS SHOWN  
ARE IN METERS AND/OR  
MILLIMETERS UNLESS  
OTHERWISE NOTED

REFERENCE DRAWINGS		ISSUE		REVISIONS	
NO.	DATE	ISSUE	NO.	DATE	REVISIONS
1	2016/08/12	50% DETAILED DESIGN	1	2016/02/01	100% DETAILED DESIGN (DRAFT) - REVISED
2	2016/10/07	75% DETAILED DESIGN			
3	2016/10/27	100% DETAILED DESIGN (DRAFT)			
4	2016/08/02	100% DETAILED DESIGN			

DRAWN BY: JDG  
DESIGNED BY: gh3  
CHECKED BY: PH  
2016/07/26  
APPROVED BY: PH  
2016/07/26  
SCALE: FULL SIZE ONLY  
1 : 5




GO SHELTER DESIGNS  
DRAWINGS LIST, SCHEDULES, AND GENERAL NOTES


CONTRACT NO: R00-2014- CON-06.1	DRAWING NO: 0.1	REV: 0.	SHEET
---------------------------------------	--------------------	---------	-------

METROLINX PROJECT NO. XXXXXX

NOTE: STEPS PROVIDED SUGGEST AN ASSEMBLY SEQUENCE THAT IS TO BE DETERMINED AND CONFIRMED BY CONTRACTOR/FABRICATOR.

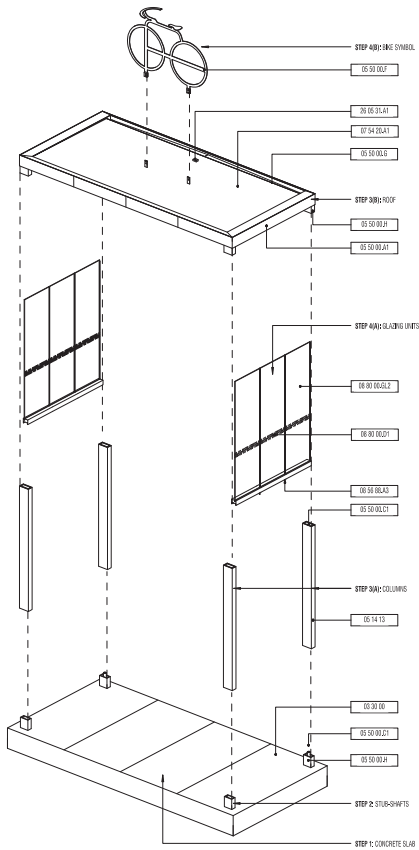


TYPE 4 EXPLODED ISOMETRIC VIEW

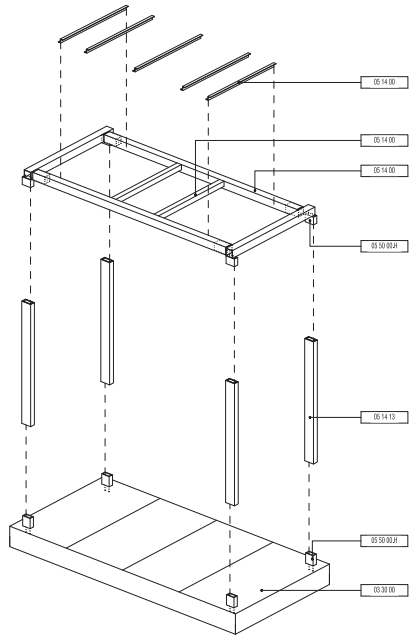


TYPE 4 STRUCTURE - EXPLODED ISOMETRIC VIEW

KEYNOTE LEGEND	
NO.	DESCRIPTION
03 00 00	CAST-IN-PLACE CONCRETE
05 14 00	STRUCTURAL ALUMINUM FRAMING
05 14 13	ARCHITECTURALLY EXPOSED STRUCTURAL ALUMINUM FRAMING
05 50 00.A1	3mm ALUMINUM PLATE
05 50 00.01	PVC RAINWATER LEADER
05 50 00.1	ALUMINUM BICYCLE SYMBOL
05 50 00.6	ALUMINUM GUTTER
05 50 00.H	ALUMINUM STRIP SHEET CONNECTION
07 54 00.A1	PVC ROOF/WALL ROOF ON 22mm PLYWOOD DECK
08 58 00.A3	GLAZING SUPPORT AND LEVELING BOLTS
08 00 00.01	EXTRACTION DECAL
08 00 00.02	TOMIX CLEAR TEMPERED GLASS
02 05 31.A1	JUNCTION BOX



TYPE 4 STRUCTURE - ISOMETRIC VIEW



TYPE 4 ISOMETRIC VIEW

METRIC  
ALL DIMENSIONS SHOWN  
ARE IN METERS AND/OR  
MILLIMETERS UNLESS  
OTHERWISE NOTED

NOTE: THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON METROLINX GO TRUST DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SITE-SPECIFIC CONDITIONS AND INTER-DISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS.

METROLINX PROJECT NO. XXXXXX

REFERENCE DRAWINGS		ISSUE		REVISIONS				
		1	2016/08/12	50% DETAILED DESIGN	1	2016/02/01	100% DETAILED DESIGN (DRAFT) - REVISED	
		2	2016/10/07	75% DETAILED DESIGN				
		3	2016/01/27	100% DETAILED DESIGN (DRAFT)				
		4	2016/08/02	100% DETAILED DESIGN				
REV:		REV:		NO:	DATE:	ISSUED FOR:	REV:	DATE:




DRAWN BY: JDG  
DESIGNED BY: gh3  
CHECKED BY: PH  
2016/07/26  
APPROVED BY: PH  
2016/07/26  
SCALE: FULL SIZE ONLY



GO SHELTER DESIGNS  
SHELTER TYPE 4 - SMALL BIKE SHELTER  
3D ISOMETRIC VIEWS

CONTRACT NO: R00-2014- CON-061	DRAWING NO: A4.0	REV: 0	SHEET
--------------------------------------	---------------------	--------	-------


KEYNOTE LEGEND	
NO.	DESCRIPTION
03 30 00	CAST-IN-PLACE CONCRETE
03 32 23	SANDBLASTED CONCRETE FINISHING
05 14 13	ARCHITECTURALLY EXPOSED STRUCTURAL ALUMINUM FRAMING
05 50 00.01	3mm ALUMINUM PLATE
05 50 00.01	PVC RAINWATER LEADER
05 50 00.05	ALUMINUM GUTTER
07 42 41.01	ALUMINUM CEILING PANELS
07 54 20.01	PVC MEMBRANE ROOF ON 25mm PLYWOOD DECK
08 00 00.02	TINTED CLEAR TEMPERED GLASS
08 05 31.01	JUNCTION BOX
08 09 24.01	PHOTOCELL DAYLIGHTING SENSOR
08 50 00.01	RECESSED LED UNDER LIGHT FIXTURE

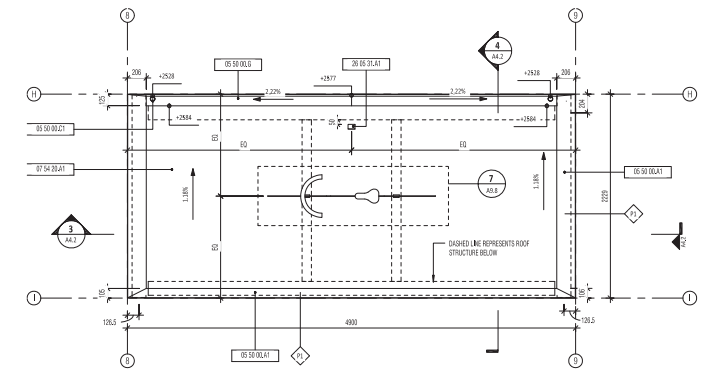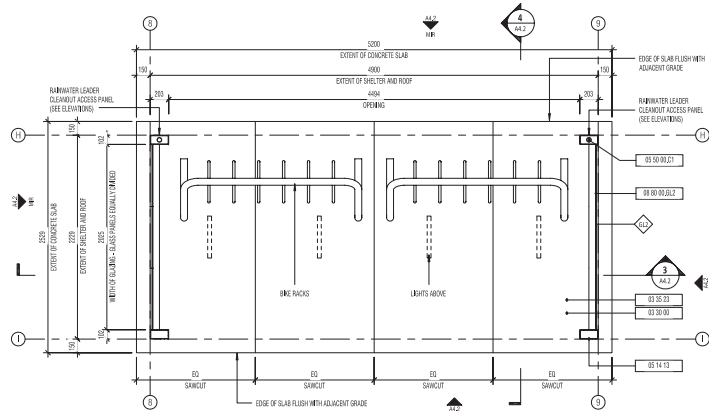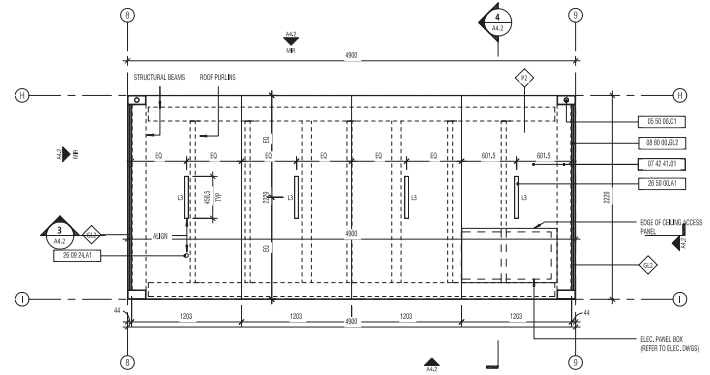


**METRIC**  
ALL DIMENSIONS SHOWN  
ARE IN METERS AND/OR  
MILLIMETERS UNLESS  
OTHERWISE NOTED


NOTE:  
THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON  
METROLINX GO TRANSIT DESIGN COMPLIANCE AND REQUIREMENTS. THE CONSULTANT  
SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SITE SPECIFIC CONDITIONS AND INTER-  
DISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS  
SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL  
CONSTRUCTION BEGINS.

METROLINX PROJECT NO. XXXXXX


REFERENCE DRAWINGS		ISSUE		REVISIONS		DRAWN BY:	DESIGNED BY:		GO SHELTER DESIGNS SHELTER TYPE 4 - SMALL BIKE SHELTER PLANS	
		1	2016/08/12	50% DETAILED DESIGN	1	2016/02/01	100% DETAILED DESIGN (DRAFT) - REVISED			CONTRACT NO:
		2	2016/10/07	75% DETAILED DESIGN	2	2016/06/29	"BY OTHER" NOTE REMOVED FROM BIKE RACKS		ROQ-2014-	0.
		3	2016/07/27	100% DETAILED DESIGN (DRAFT)					CON-06.1	
		4	2016/08/02	100% DETAILED DESIGN						
REV:	REV:	NO:	DATE:	ISSUED FOR:	REV:	DATE:	SCALE:	FULL SIZE ONLY		
							1 : 25			

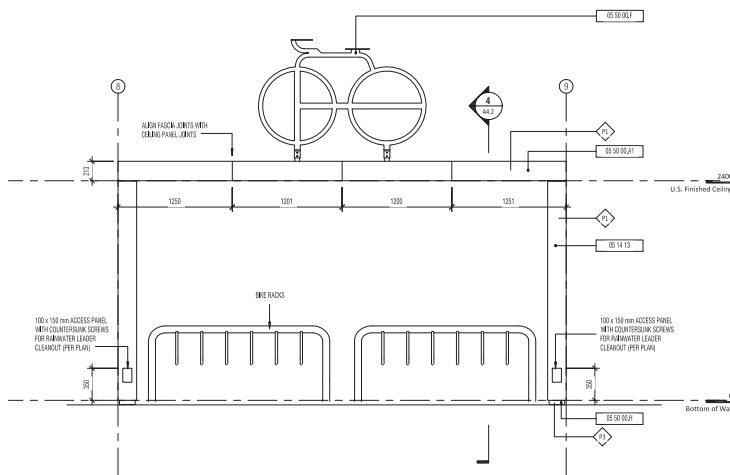


1 TYPE 4 ELEVATION - OPEN (LONG) SIDE  
A4.2 1:25

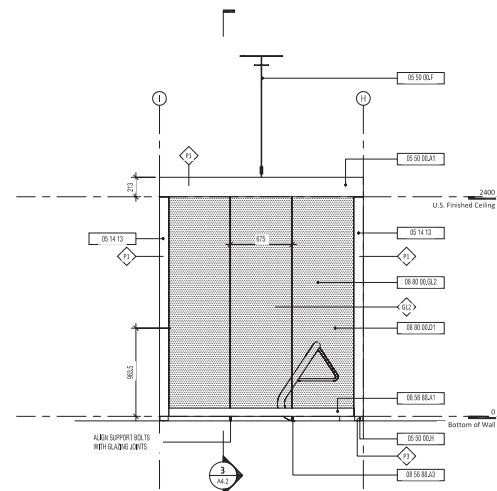

2 TYPE 4 ELEVATION - GLAZED (SHORT) SIDE  
A4.2 1:25

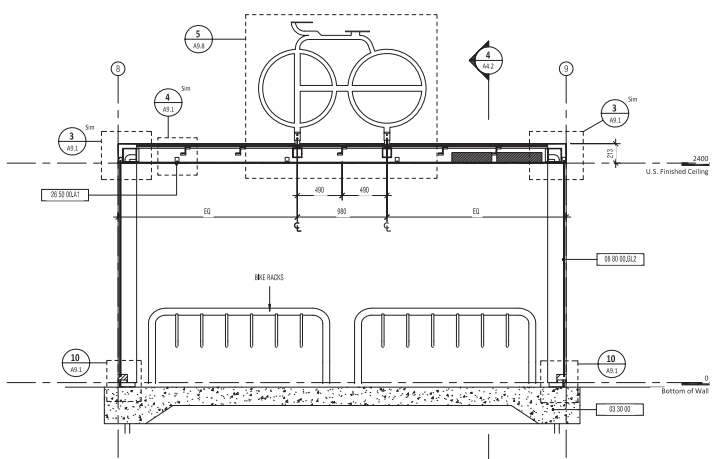

3 TYPE 4 SECTION 1  
A4.2 1:25

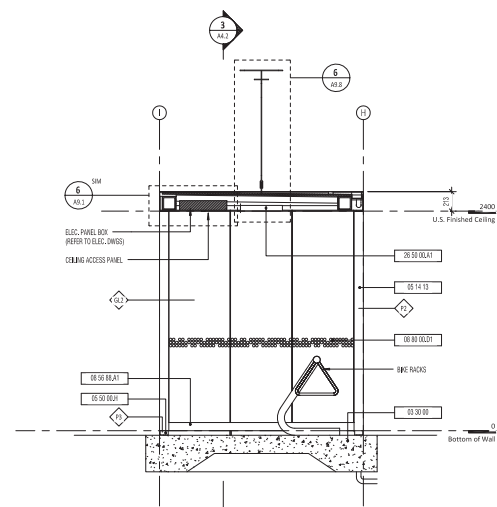

4 TYPE 4 SECTION 2  
A4.2 1:25

KEYNOTE LEGEND	
NO.	DESCRIPTION
05 30 00	CAST-IN-PLACE CONCRETE
05 14 13	ARCHITECTURALLY-EXPOSED STRUCTURAL ALUMINUM FRAMING
05 50 00.A1	10mm ALUMINUM PLYTE
05 50 00.F	ALUMINUM BKE SYMBOL
05 50 00.H	ALUMINUM STUD SHAF CONNECTION
05 50 00.A1	CUSTOM ALUMINUM GLAZING GRISE
05 50 00.A3	GLAZING SUPPORT AND LEVELING BOLTS
05 50 00.01	EXTRACTION DECAL
05 50 00.02	TINTED CLEAR TEMPERED GLASS
05 50 00.A1	RECESSED LED LINEAR LIGHT FIXTURE

NOTE:  
THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON METROLINX GO TRANSIT DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SPECIFIC SITE CONDITIONS AND INTERDISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS.

METRIC  
ALL DIMENSIONS SHOWN  
ARE IN METERS AND/OR  
MILLIMETERS UNLESS  
OTHERWISE NOTED

METROLINX PROJECT NO. XXXXXX

REFERENCE DRAWINGS		ISSUE		REVISIONS			
		1	2016/08/12	50% DETAILED DESIGN	1	2016/02/01	100% DETAILED DESIGN (DRAFT) - REVISED
		2	2016/10/07	75% DETAILED DESIGN	2	2016/06/29	"BY OTHERS" NOTE REMOVED FROM BKE RACKS
		3	2016/07/27	100% DETAILED DESIGN (DRAFT)			
		4	2016/08/02	100% DETAILED DESIGN			


DRAWN BY: JDG  
DESIGNED BY: gh3  
CHECKED BY: PH  
2016/07/26  
APPROVED BY: PH  
2016/07/26  
SCALE: 1:25  
FULL SIZE ONLY




GO SHELTER DESIGNS  
SHELTER TYPE 4 - SMALL BIKE SHELTER  
ELEVATIONS AND SECTIONS

CONTRACT NO: RQD-2014- CON-061	DRAWING NO: A4.2	REV: SHEET 0.
--------------------------------------	---------------------	------------------


NOTE: STEPS PROVIDED SUGGEST AN ASSEMBLY SEQUENCE THAT IS TO BE DETERMINED AND CONFIRMED BY CONTRACTOR FABRICATION.

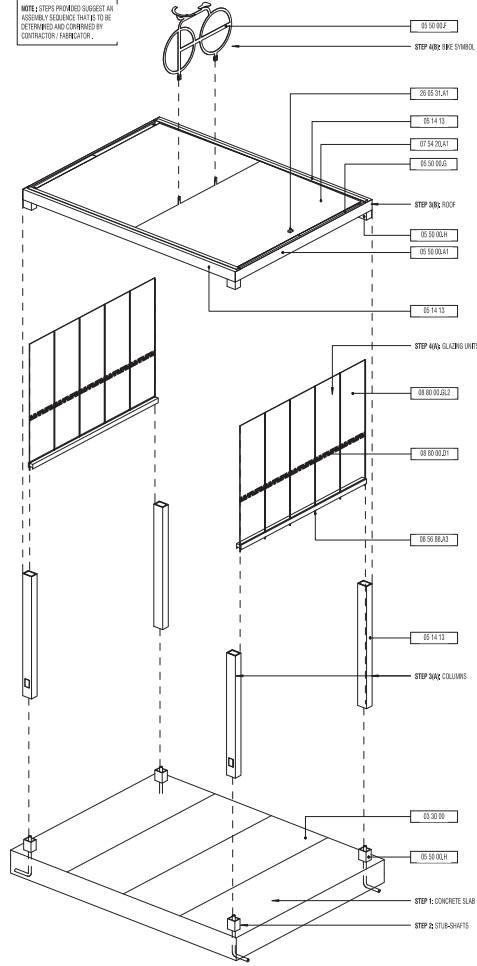


TYPE 5 EXPLODED ISOMETRIC VIEW

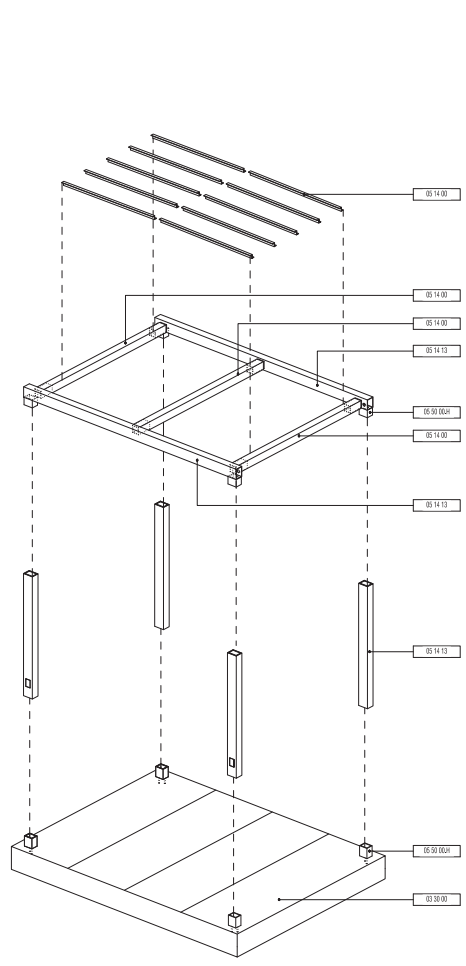

TYPE 5 STRUCTURE - EXPLODED ISOMETRIC VIEW

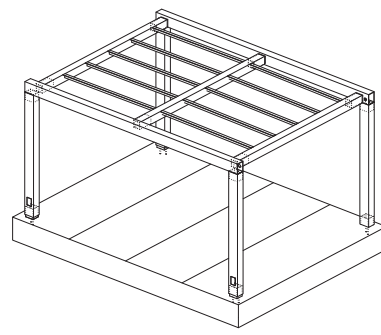

TYPE 5 STRUCTURE - ISOMETRIC VIEW

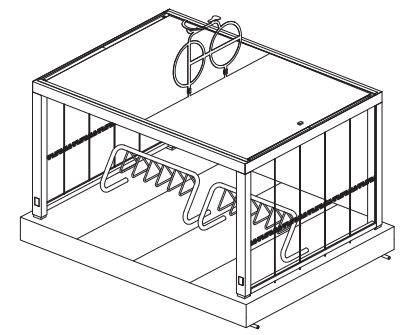

TYPE 5 ISOMETRIC VIEW

KEYNOTE LEGEND	
NO.	DESCRIPTION
03 30 00	CAST-IN-PLACE CONCRETE
05 14 00	STRUCTURAL ALUMINUM FRAMING
05 14 13	ARCHITECTURALLY-EXPOSED STRUCTURAL ALUMINUM FRAMING
05 50 00 A 1	3mm ALUMINUM PLATE
05 50 00 F	ALUMINUM FRAME SYMBOL
05 50 00 G	ALUMINUM GUTTER
05 50 00 H	ALUMINUM STUB SHAFT CONNECTION
07 54 00 A 1	PVC MEMBRANE ROOF ON 25mm PVC WOOD DECK
08 56 00 A 3	GLAZING SUPPORT AND LEVELLING BOLTS
08 80 00 01	EXTRACTION DECAL
08 80 00 02	TORNS CLEAR TEMPERED GLASS
08 00 01 A 1	BIKE SYMBOL

NOTE: THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON METROLINX GO TRANSIT DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SITE SPECIFIC CONDITIONS AND INTER-DISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS.

METROLINX PROJECT NO. XXXXXX

METRIC  
ALL DIMENSIONS SHOWN  
ARE IN METERS AND/OR  
MILLIMETERS UNLESS  
OTHERWISE NOTED


REFERENCE DRAWINGS		ISSUE		REVISIONS				
		1	2015/08/12	50% DETAILED DESIGN	1	2016/02/01	100% DETAILED DESIGN (DRAFT) - REVISED	
		2	2016/10/07	75% DETAILED DESIGN				
		3	2016/10/27	100% DETAILED DESIGN (DRAFT)				
		4	2016/08/02	100% DETAILED DESIGN				
REV:		REV:		NO:	DATE:	ISSUED FOR:	REV:	DATE:

DRAWN BY: JDG  
DESIGNED BY: gh3  
CHECKED BY: PH  
2016/07/26  
APPROVED BY: PH  
2016/07/26  
SCALE: FULL SIZE ONLY




GO SHELTER DESIGNS  
SHELTER TYPE 5 - LARGE BIKE SHELTER  
3D ISOMETRIC VIEWS

CONTRACT NO: R00-2014- CON-061	DRAWING NO: A5.0	REV: 0	SHEET
--------------------------------------	---------------------	--------	-------

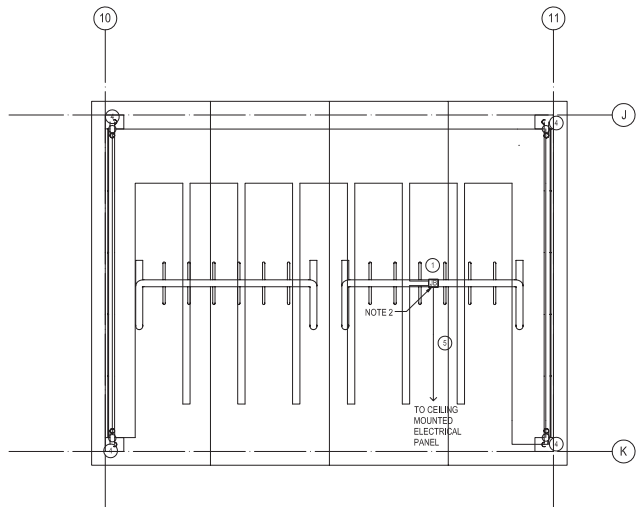

1 SHELTER TYPE 5 - ELECTRICAL LINE VOLTAGE PLAN  
1:25

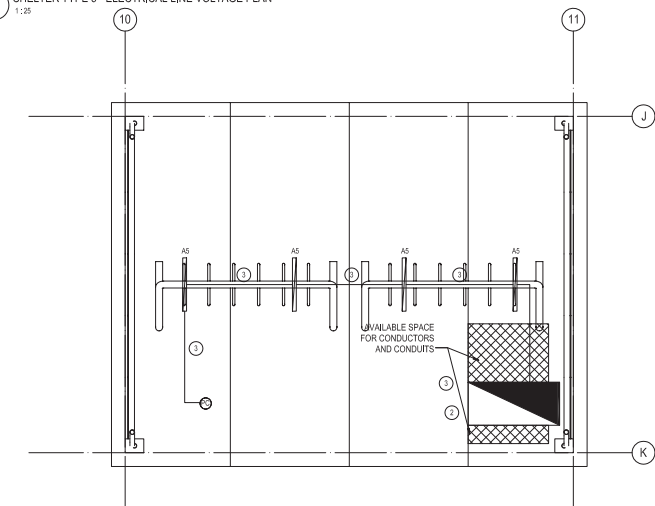

2 SHELTER TYPE 5 - ELECTRICAL LOW VOLTAGE PLAN  
1:25

- DRAWING KEYNOTES:**
- 1 EXTERIOR ROOF MOUNTED WEATHER PROOF JUNCTION BOX FOR HEAT TRACE SYSTEM.
  - 2 PROVIDE HEATED CUSTOM CABINET MOUNTED IN THE CEILING BEHIND ACCESS AN HATCH. ENCLOSURE TO BE 470mm WIDE X 1000mm HIGH X 125mm DEEP.
  - 3 CONSOLIDATE LOW VOLTAGE WIRING INTO ONE MULTI-CONDUCTOR ARMoured CABLES FOR ALL #14AWG CONDUCTORS.
  - 4 INSTALL HEAT TRACE DOWN RAIN WATER LEADER TO GRADE.
  - 5 CONSOLIDATE WIRING INTO ONE OF TWO MULTI-CONDUCTOR ARMoured CABLES FOR ALL #12AWG CONDUCTORS.

- DRAWING NOTES:**
1. INSTALL HEAT TRACE PARALLEL ALONG CORRUGATION LINES, AND ACCORDING TO MANUFACTURER'S INSTRUCTIONS.
  2. ALL CONDUCTORS TO BE PART OF MULTI-CONDUCTOR ARMoured CABLES. CONSIDERATION MUST TAKE PLACE IN CEILING MOUNTED DEVICE BOX. NO ACCESS PANELS FOR ADDITIONAL JUNCTION BOXES ARE ALLOWED.

**METRIC**  
ALL DIMENSIONS SHOWN  
ARE IN METERS UNLESS  
OTHERWISE NOTED

**NOTE:**  
THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON METROLINX GO TRANSIT DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SITE SPECIFIC CONDITIONS AND INTER-DISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS.

METROLINX PROJECT NO. XXXXXX


REFERENCE DRAWINGS			ISSUED			REVISIONS		
No.	DATE	DESCRIPTION	No.	DATE	DESCRIPTION	No.	DATE	DESCRIPTION
1	2016/07/26	ISSUE FOR CONSTRUCTION						
2	2016/07/26	ISSUE FOR CONSTRUCTION						
3	2016/07/26	ISSUE FOR CONSTRUCTION						
4	2016/07/26	ISSUE FOR CONSTRUCTION						
5	2016/07/26	ISSUE FOR CONSTRUCTION						
6	2016/07/26	ISSUE FOR CONSTRUCTION						

DRAWN BY: BRM  
DESIGNED BY: INTEGRAL GROUP  
CHECKED BY: CvB  
2016/07/26  
APPROVED BY: BG  
2016/07/26  
SCALE: FULL SIZE ONLY  
As indicated




**GO - Metrolinx Shelters**  
SHELTER TYPE 5 - LARGE BIKE SHELTER - POWER AND LIGHTING PLANS  
CONTRACT NO: R00-2014-CON-061  
DRAWING NO: E5.1  
REV: 0  
SHEET


KEYNOTE LEGEND	
NO.	DESCRIPTION
03 30 00	CAST-IN-PLACE CONCRETE
05 14 00	STRUCTURAL ALUMINUM FRAMING
05 14 13	ARCHITECTURALLY-EXPOSED STRUCTURAL ALUMINUM FRAMING
05 50 00A1	3mm ALUMINUM PLATE
05 50 00L	ALUMINUM BRK STANDBOL
05 50 00G	ALUMINUM GUTTER
05 50 00H	ALUMINUM STUB SHAFT CONNECTION
07 42 41T1	ALUMINUM CEILING PANELS
07 54 00A1	PVC MEMBRANE ROOF OR 25mm PLYWOOD DECK
08 58 00A1	CUSTOM ALUMINUM GLAZING SHOE
08 58 00A3	GLAZING SUPPORT AND LEVELING BOLTS
08 80 00G01	DESTRUCTION LOGICAL
08 80 00G02	10MM CLEAR TEMPERED GLASS
08 50 00A1	RECESSED LED LINEAR LIGHT FIXTURE

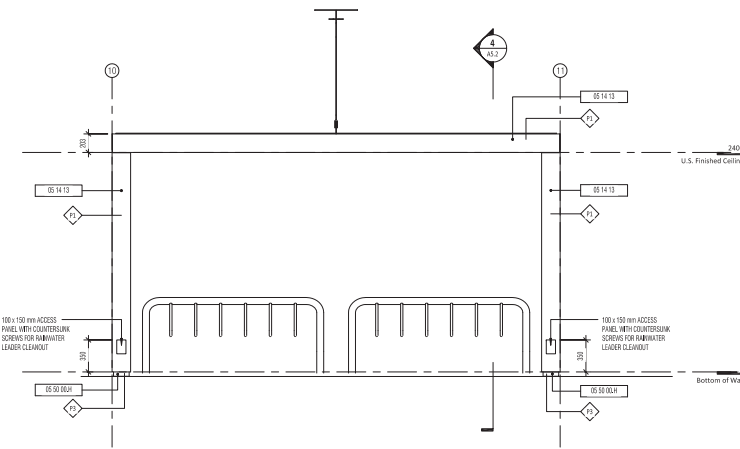


1 TYPE 5 ELEVATION - OPEN SIDE  
AS.2 1:25

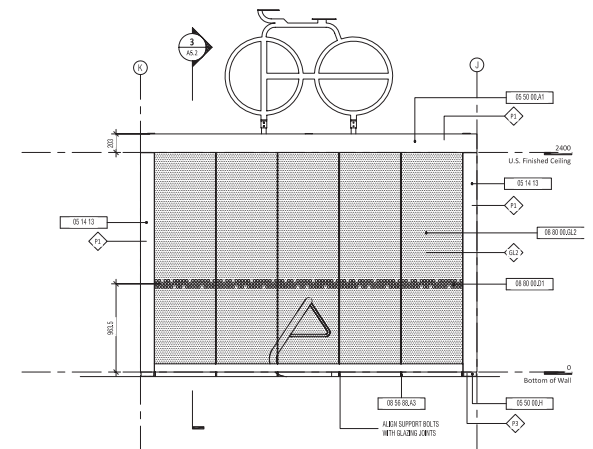

2 TYPE 5 ELEVATION - GLAZED SIDE  
AS.2 1:25

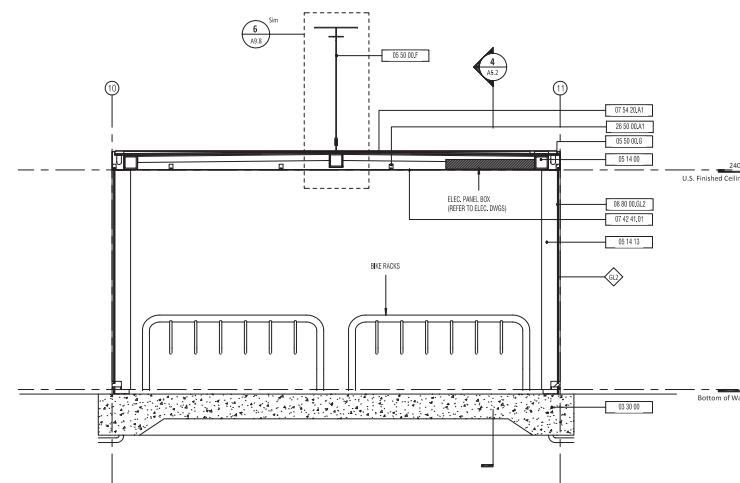

3 TYPE 5 SECTION 1  
AS.2 1:25

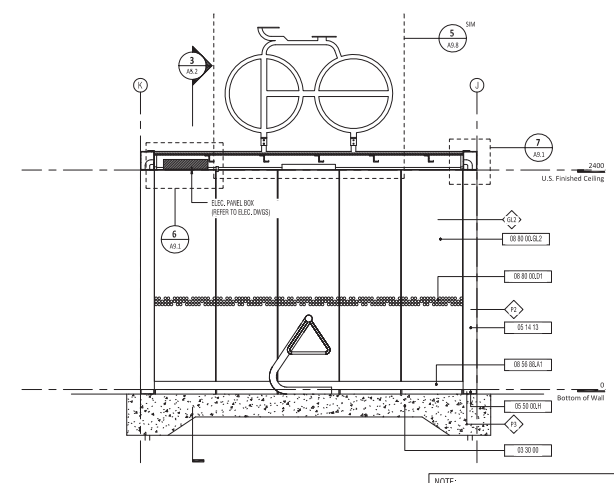


4 TYPE 5 SECTION 2  
AS.2 1:25

NOTE:  
THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON METROLINX GO TRANSIT DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SITE SPECIFIC CONDITIONS AND INTERDISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS.


METROLINX PROJECT NO. XXXXXX

METRIC  
ALL DIMENSIONS SHOWN  
ARE IN METERS AND/OR  
MILLIMETERS UNLESS  
OTHERWISE NOTED


REFERENCE DRAWINGS		ISSUE		REVISIONS		DRAWN BY:	DESIGNED BY:		GO SHELTER DESIGNS SHELTER TYPE 5 - LARGE BIKE SHELTER ELEVATIONS AND SECTIONS				
		1	2016/08/12	50% DETAILED DESIGN	1	2016/08/01	100% DETAILED DESIGN (DRAFT) - REVISED		CHECKED BY:	APPROVED BY:	CONTRACT NO:	DRAWING NO:	REV. SHEET
		2	2016/10/07	75% DETAILED DESIGN	2	2016/08/09	"BY OTHERS" NOTE REMOVED FROM BIKE RACK		PH	PH	ROQ-2014-	A5.2	0.
		3	2016/10/27	100% DETAILED DESIGN (DRAFT)					2016/07/26	2016/07/26	CON-061		
		4	2016/08/02	100% DETAILED DESIGN									
REV:	REV:	NO:	DATE:	ISSUED FOR:	REV:	DATE:	SCALE:	FULL SIZE ONLY					
							1 : 25						




# ROOF

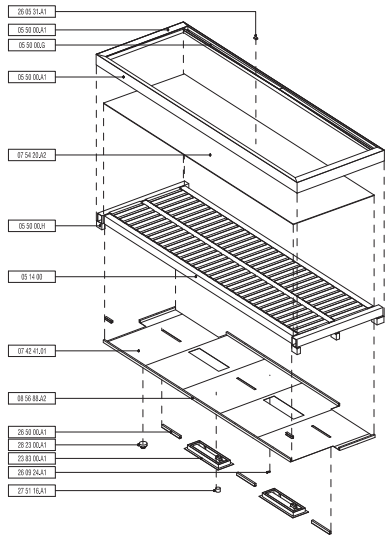


ROOF EXPLODED ISOMETRIC VIEW

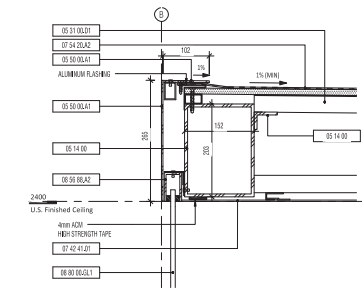


1 FRONT ROOF FASCIA - SECTION DETAIL




2 BACK ROOF FASCIA - SECTION DETAIL

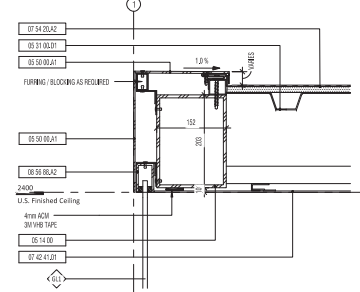


3 SIDE ROOF FASCIA - SECTION DETAIL




4 LIGHT DETAIL

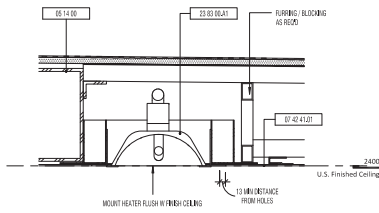


5 HEATER - SECTION DETAIL

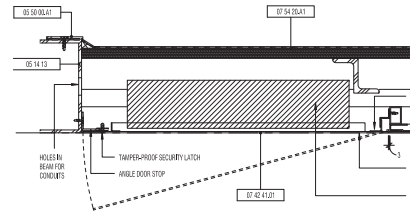

6 CEILING ACCESS PANEL SECTION DETAIL




7 TYPE 5 OPEN FASCIA - SECTION DETAIL




8 UNENCLOSED FRONT ROOF FASCIA - SECTION DETAIL


# GLAZING




GLASS SCREEN - EXPLODED ISOMETRIC



9 GLAZING BASE AT GRADE - SECTION DETAIL A



10 RAKED GLAZING BASE - SECTION DETAIL

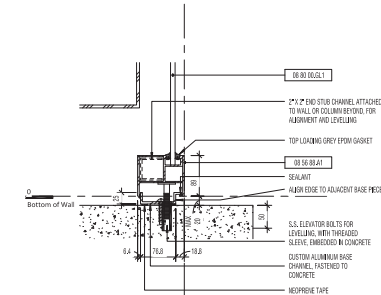

11 GLAZING BASE AT GRADE - SECTION DETAIL B

KEYNOTE LEGEND	
NO.	DESCRIPTION
05 14 00	STRUCTURAL ALUMINUM FRAMING
05 14 13	ARCHITECTURALLY EXPOSED STRUCTURAL ALUMINUM FRAMING
05 31 00.01	STEEL ROOF DECKING
05 50 00.01	3mm ALUMINUM PLATE
05 50 00.02	ALUMINUM GUTTER
05 50 00.04	ALUMINUM STUD SHIRT CONNECTION
07 42 41.01	ALUMINUM CEILING PANELS
07 54 20.01	PVC MEMBRANE ROOF ON 20mm 2x4 WOOD DECK
07 54 20.02	PVC MEMBRANE ROOF ON 10mm SHEATHING BOARD
08 56 00.01	CUSTOM ALUMINUM GLAZING SHOE
08 80 00.01	PRESESSLED GLAZING HEAD CHANNEL
08 80 00.02	STRUCTURAL DECK
08 80 00.03	FOAM CLEAR TEMPERED GLASS WITH PROTECTIVE COATING
08 80 00.04	ALUM EDGE TO ADVANCE BASE PICES
08 80 00.05	STAIN CLEAR TEMPERED GLASS
23 03 00.01	RADIANT INFRARED HEATERS - ELECTRIC
23 03 31.01	FUNCTION BOX
26 02 24.01	PHOTOCELL DAYLIGHTING SENSOR
26 50 00.01	PRESESSLED LINEAR LIGHT FIXTURE
27 51 16.01	PUBLIC ADDRESS SPEAKER
28 20 00.01	OUTDOOR CCTV CAMERA

NOTE: THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON METROLINEX GO SHELTER DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SPECIFIC SITE CONDITIONS AND INTERDISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS.


METROLINEX PROJECT NO. XXXXXX

METRIC  
ALL DIMENSIONS SHOWN  
ARE IN METERS UNLESS  
OTHERWISE NOTED


REFERENCE DRAWINGS		ISSUE		REVISIONS		DRAWN BY:	DESIGNED BY:	GO SHELTER DESIGNS GENERAL	
		1	2015/08/12	50% DETAILED DESIGN	1	2016/02/01	100% DETAILED DESIGN (DRAFT) - REVISED	ROOF AND GLAZING DETAILS	
		2	2015/10/07	75% DETAILED DESIGN				CONTRACT NO: R00-2014-CON-06.1	
		3	2016/01/27	100% DETAILED DESIGN (DRAFT)				DRAWING NO: A9.1	
		4	2016/08/02	100% DETAILED DESIGN				REV: SHEET 0.	
REV:	REV:	NO:	DATE:	ISSUED FOR:	REV:	DATE:			






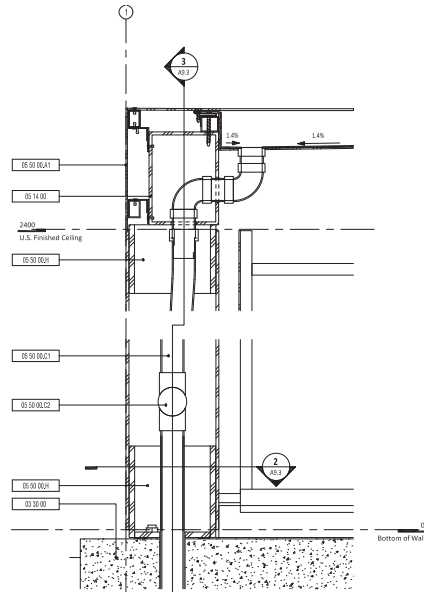

1 INFO / SERVICE WALL A COLUMN SECTION DETAIL 1  
1:5




2 COLUMN BASE PLAN DETAIL  
1:5

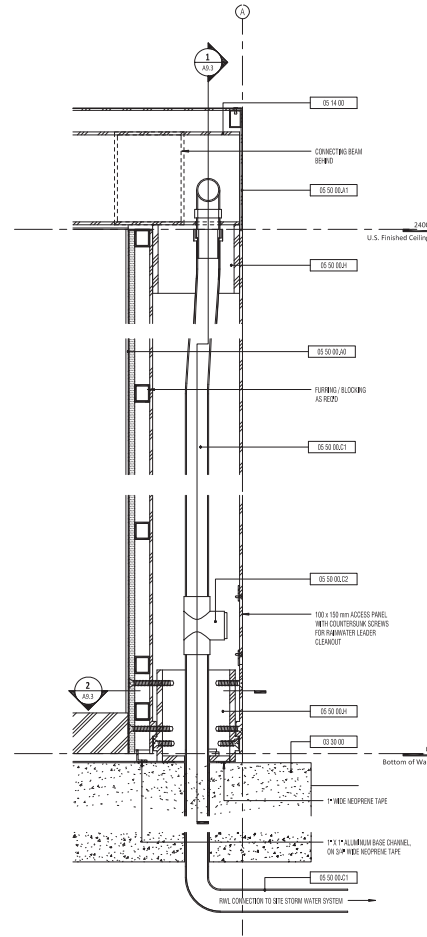

3 INFO / SERVICE WALL COLUMN SECTION DETAIL 2  
1:5

KEYNOTE LEGEND	
NO.	DESCRIPTION
05 30 00	COST SURFACE CONCRETE
05 14 00	STRUCTURAL ALUMINUM FRAMING
05 50 00 03	ARCHITECTURAL EXPOSED STRUCTURAL ALUMINUM FRAMING
05 50 00 04	ALUMINUM SHEET
05 50 00 041	3mm ALUMINUM PLATE
05 50 00 043	6.4mm ALUMINUM PLATE
05 50 00 046	ALUMINUM FRAMING
05 50 00 051	PVC RAINWATER LEADER
05 50 00 052	RAINWATER LEADER CLEANOUT
05 50 00 054	ALUMINUM STUD SHIRT CONNECTION
05 50 22 01	TWO-WAY COMMUNICATION DEVICE

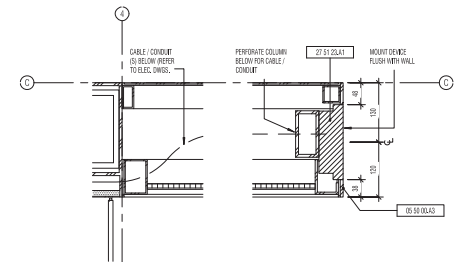

4 INFO - SERVICE WALL A (SIP Station)  
1:5

NOTE:  
THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON METROLINX GO SHELTER DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SPECIFIC SITE CONDITIONS AND INTERDISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS.


METROLINX PROJECT NO. XXXXXX

METRIC  
ALL DIMENSIONS SHOWN  
ARE IN METERS AND/OR  
MILLIMETERS UNLESS  
OTHERWISE NOTED


REFERENCE DRAWINGS		ISSUE		REVISIONS		DRAWN BY:	DESIGNED BY:		<b>GO SHELTER DESIGNS</b> GENERAL INFO / SERVICE WALL A DETAILS			
		1	2016/08/12	50% DETAILED DESIGN	1	2016/02/01	100% DETAILED DESIGN (DRAFT) - REVISED			CONTRACT NO: R00-2014- CON-061	DRAWING NO: A9.3	REV: 0 SHEET
		2	2016/10/07	75% DETAILED DESIGN								
		3	2016/10/27	100% DETAILED DESIGN (DRAFT)								
		4	2016/08/02	100% DETAILED DESIGN								
REV:	REV:	NO:	DATE:	ISSUED FOR:	REV:	DATE:	SCALE:	FULL SIZE ONLY				

# INFO / SERVICE WALL B


NOTE: INFO / SERVICE WALL B IS TO BE DEDICATED TO DISPLAYING SCHEDULE INFORMATION AND/OR MARKETING PROMOTION. PROVIDING ANEMATED WEATHER CONTROL, DATA AND LOG CONTROL, AND CHARGE CONTROL FOR OTHER MEDIA SUCH AS ALUMINUM GUTTER WALL, OR WITH AN EXTERIOR BACKUP POSTER DISPLAY FOR LOGO PARTY ADVERTISING PROVIDED BY OTHERS.



NO.	DESCRIPTION
05 14 00	STRUCTURAL ALUMINUM FRAMING
05 14 10	ARCHITECTURALLY EXPOSED STRUCTURAL ALUMINUM FRAMING
05 50 00.00	ALUMINUM SHEET
05 50 00.01	3mm ALUMINUM PLATE
05 50 00.02	3mm ALUMINUM PLATE
05 50 00.03	64mm ALUMINUM PLATE
05 50 00.06	ALUMINUM FRAMING
05 50 00.01	PVC SUBWATER LEADER
05 50 00.05	ALUMINUM GUTTER
07 42 01.01	ALUMINUM CERAMIC PANELS
07 54 20.02	PVC MEMBRANE ROOF ON 13mm SHEATHING BOARD
08 80 00.02	TINTED CLEAR TEMPERED GLASS
08 80 00.03.1	SHIM CLEAR LOW-IRON TEMPERED GLASS
08 80 00.03.2	SHIM LOW-IRON TEMPERED GLASS WITH WHITE CERAMIC ON BACK
23 83 00.00	HEATER CONTROL BUTTON
28 27 28.01	LED SCREEN
28 27 28.02	LED LIGHT PANEL
28 27 28.03	SPRINKLER RECEPTACLE
28 27 28.04	USB CHARGING RECEPTACLE

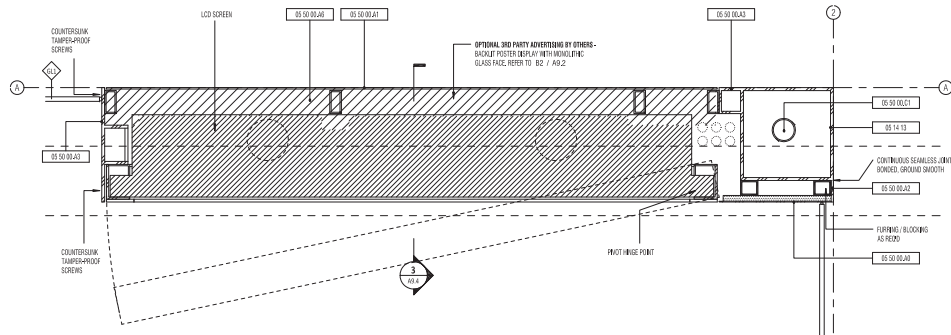


1 INFO / SERVICE WALL B UPPER PLAN DETAIL  
1:3

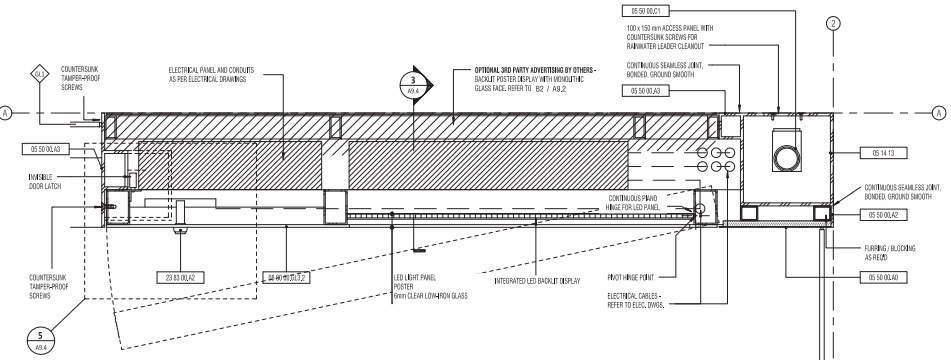


2 INFO / SERVICE WALL B LOWER PLAN DETAIL  
1:3


METRIC  
ALL DIMENSIONS SHOWN IN METERS UNLESS OTHERWISE NOTED

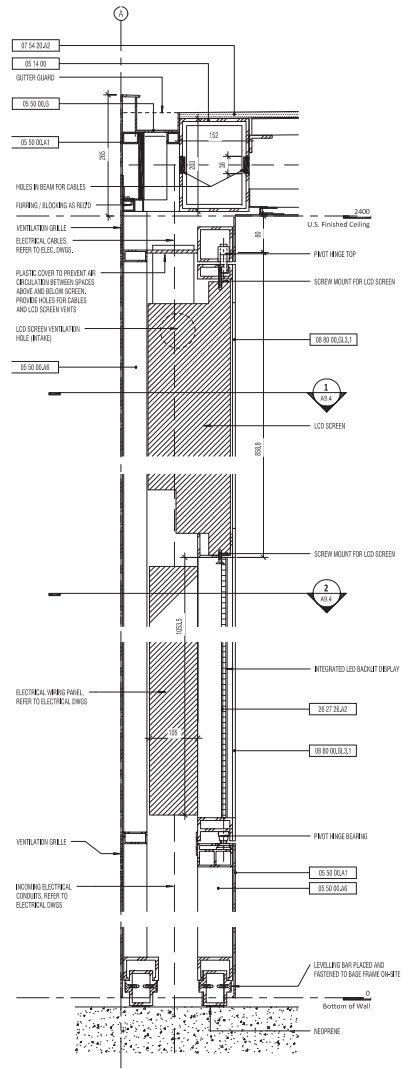

3 INFO / SERVICE WALL B SECTION DETAIL - SINGLE-SIDED OPTION  
1:3

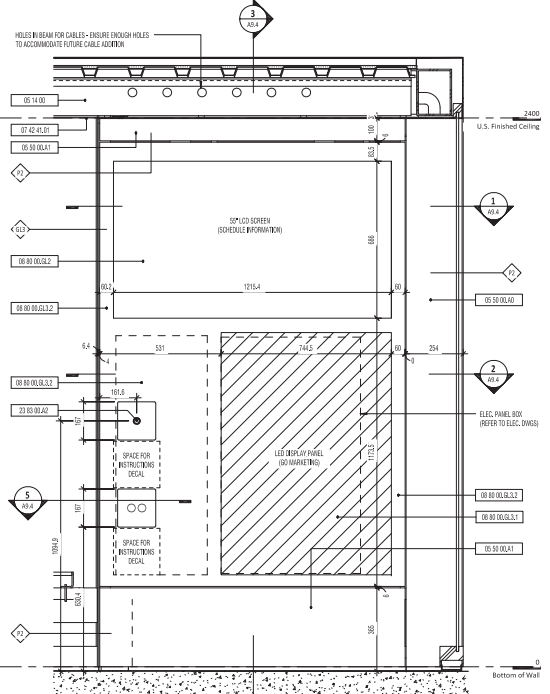

4 INFO / SERVICE WALL B INTERIOR ELEVATION DETAIL  
1:3



5 RECEPTACLE COVER PLAN DETAIL  
1:3

NOTE: THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON METROLINX GO TRANSIT DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SIZE, TYPE, CONDITIONS AND INTER-DISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS.

METROLINX PROJECT NO. XXXXXX

REV.	REV.	NO.	DATE	ISSUED FOR	REV.	DATE


REFERENCE DRAWINGS	ISSUE	REVISIONS	DRAWN BY: JDG	DESIGNED BY: gh3
	1 2015/08/12 50% DETAILED DESIGN	1 2016/02/01 100% DETAILED DESIGN (DRAFT) - REVISED		
	2 2015/10/07 75% DETAILED DESIGN			
	3 2016/01/27 100% DETAILED DESIGN (DRAFT)			
	4 2016/08/02 100% DETAILED DESIGN			
			CHECKED BY: PH	APPROVED BY: PH
			2016/07/26	2016/07/26
			SCALE: FULL SIZE ONLY	
			As indicated	



GO SHELTER DESIGNS  
GENERAL  
INFO / SERVICE WALL B DETAILS



CONTRACT NO: R00-2014-CON-06.1	DRAWING NO: A9.4	REV: 0.	SHEET
--------------------------------	------------------	---------	-------

### TYPE C INFO / SERVICE WALL

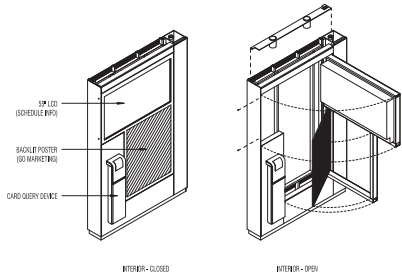


KEYNOTE LEGEND	
NO.	DESCRIPTION
05 14 00	STRUCTURAL ALUMINUM FRAMING
05 14 13	ARCHITECTURALLY-EXPOSED STRUCTURAL ALUMINUM FRAMING
05 50 00.00	ALUMINUM SHEET
05 50 00.01	6mm ALUMINUM PLATE
05 50 00.02	6mm ALUMINUM PLATE
05 50 00.06	ALUMINUM FRAMING
07 42 41.01	ALUMINUM CEILING PANELS
08 00 00.00.2	10MM CLEAR TEMPERED GLASS
08 00 00.00.1	8MM CLEAR LOW-RON TEMPERED GLASS
08 00 00.00.3	8MM LOW-RON TEMPERED GLASS WITH WHITE CERAMIC ON BACK
08 27 28.01	LED SCREEN


### TYPE 6 INFO / SERVICE WALL

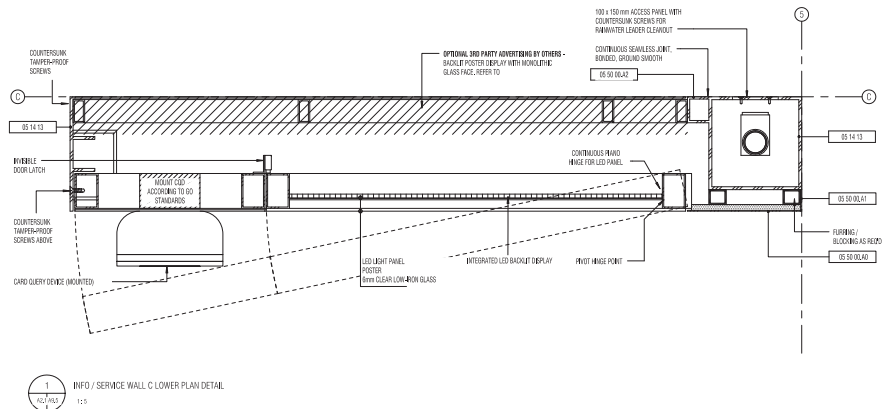


1 INFO / SERVICE WALL C LOWER PLAN DETAIL  
1:5

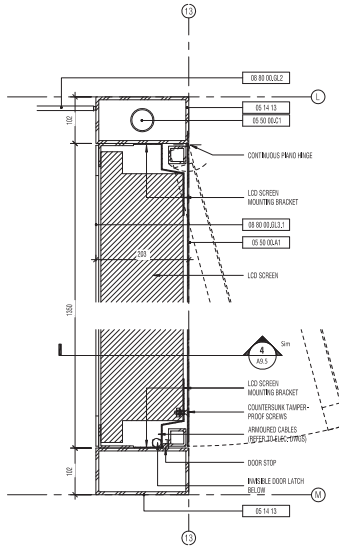

2 TYPE 6 INFO / SERVICE WALL DETAIL PLAN (UPPER)  
1:5

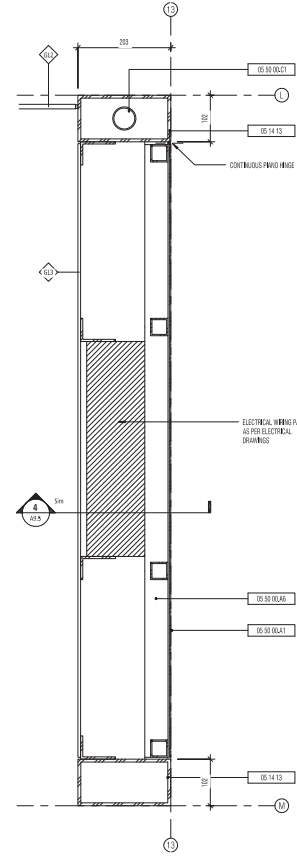

3 TYPE 6 INFO / SERVICE WALL DETAIL PLAN (LOWER)  
1:5

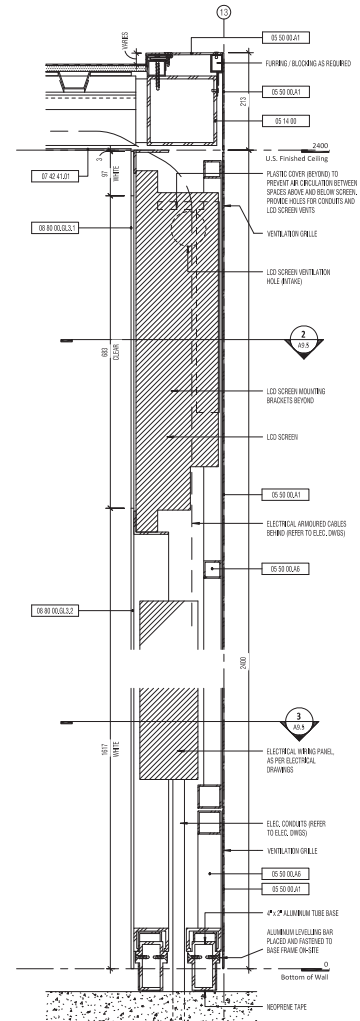

4 TYPE 6 INFO / SERVICE WALL DETAIL SECTION  
1:5

NOTE: THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON METROLINX GO TRANSIT DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT SHALL VERIFY FOR LOCAL CODE COMPLIANCE, CHECKING SITE CONDITIONS AND INTERDISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS.

METROLINX PROJECT NO. XXXXXX

METRIC  
ALL DIMENSIONS SHOWN  
ARE IN METERS, UNLESS  
OTHERWISE NOTED

REFERENCE DRAWINGS		ISSUE		REVISIONS			
		1	2015/08/12	50% DETAILED DESIGN	1	2016/02/01	100% DETAILED DESIGN (DRAFT) - REVISED
		2	2016/10/07	75% DETAILED DESIGN			
		3	2016/10/27	100% DETAILED DESIGN (DRAFT)			
		4	2016/08/02	100% DETAILED DESIGN			
REV:	REV:	NO:	DATE:	ISSUED FOR:	REV:	DATE:	

DRAWN BY: JDC  
DESIGNED BY: gh3  
CHECKED BY: PH  
2016/07/26  
APPROVED BY: PH  
2016/07/26  
SCALE: 1:5  
FULL SIZE ONLY




GO SHELTER DESIGNS  
GENERAL  
ADDITIONAL INFO / SERVICE WALL DETAILS



CONTRACT NO: R00-2014- CON-06.1	DRAWING NO: A9.5	REV: SHEET 0.
---------------------------------------	---------------------	------------------




# DOOR SWING GUARDS



**1 DOOR GUARD PLAN DETAIL**  
A9.7 1:10

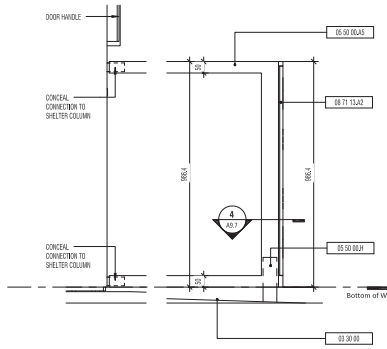


**2 DOOR GUARD SIDE ELEVATION**  
A9.7 1:10





**3 DOOR GUARD FRONT ELEVATION**  
A9.7 1:10

**4 DOOR GUARD PLAN SECTION DETAIL**  
A9.7 1:5




KEYNOTE LEGEND	
NO.	DESCRIPTION
03 30 00	CAST-IN-PLACE CONCRETE
05 14 00	STRUCTURAL ALUMINUM FRAMING
05 14 10	ARCHITECTURALLY-EXPOSED STRUCTURAL ALUMINUM FRAMING
05 50 00.01	3mm ALUMINUM PLATE
05 50 00.05	ALUMINUM EXTRUSION
05 50 00.06	13mm WHITE CORIAN
05 50 00.08	ALUMINUM STUD SHIRT CONNECTION
05 71 13.02	AUTOMATIC DOOR OPERATOR BUTTON


# OPEN FRAME

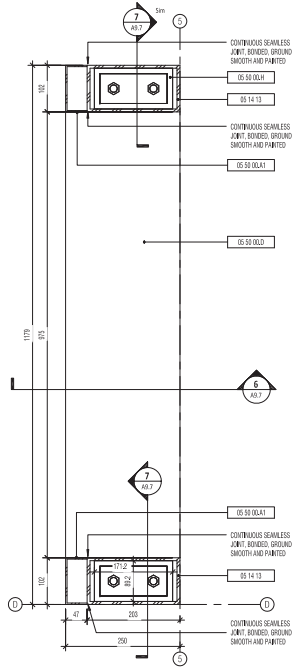


**9 OPEN FRAME PLAN DETAIL**  
A9.7 1:5

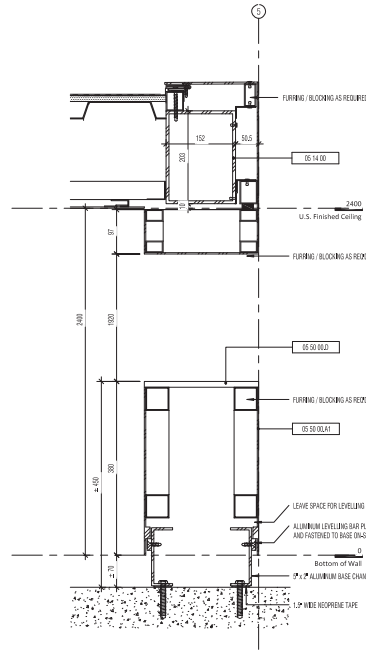

**6 OPEN FRAME SECTION DETAIL**  
A9.7 1:5

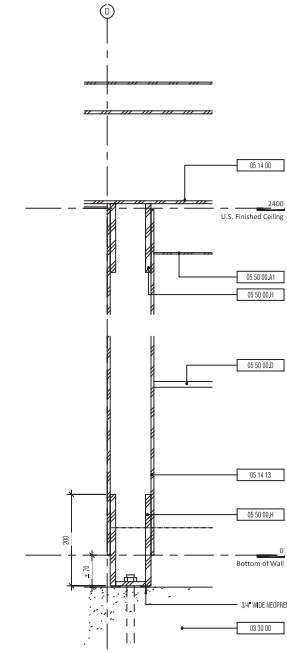

**7 OPEN FRAME SECTION DETAIL I**  
A9.7 1:5

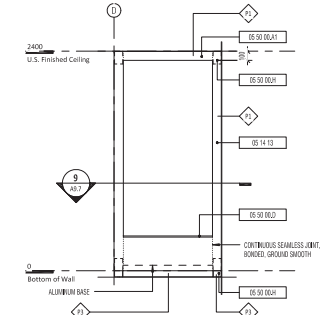

**8 OPEN FRAME EXTERIOR ELEVATION DETAIL**  
A9.7 1:5

NOTE:  
THE DRAWINGS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON METROLINX SHIELD DESIGN GUIDELINES AND REQUIREMENTS. THE CONTRACTOR SHALL VERIFY FOR LOCAL CODE COMPLIANCE. FOR BEST PRACTICES, CONSULTING AND DISCIPLINARY DRAWING COORDINATION, ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED BY CONSULTING ARCHITECT CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS.

METROLINX PROJECT NO. XXXXXX

### METRIC

ALL DIMENSIONS SHOWN ARE IN METERS UNLESS OTHERWISE NOTED

REFERENCE DRAWINGS		ISSUE		REVISIONS			
		1	2015/08/12	50% DETAILED DESIGN	1	2016/02/01	100% DETAILED DESIGN (DRAFT)-REVISED
		2	2016/10/07	75% DETAILED DESIGN			
		3	2016/10/27	100% SET TABLED DESIGN (DRAFT)			
		4	2016/08/02	100% DETAILED DESIGN			

DRAWN BY: JDG  
DESIGNED BY: gh3  
CHECKED BY: PH  
2016/07/26  
APPROVED BY: PH  
2016/07/26




SCALE: FULL SIZE ONLY  
As indicated




GO SHELTER DESIGNS  
GENERAL  
SWING GUARD AND OPEN FRAME DETAILS

CONTRACT NO: R00-2014- CON-06.1	DRAWING NO: A9.7	REV: SHEET 0.
---------------------------------------	---------------------	------------------


# BENCHES

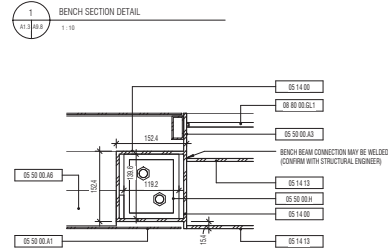

3 BENCH BASE PLAN DETAIL  
A4.3/04.8 1:5

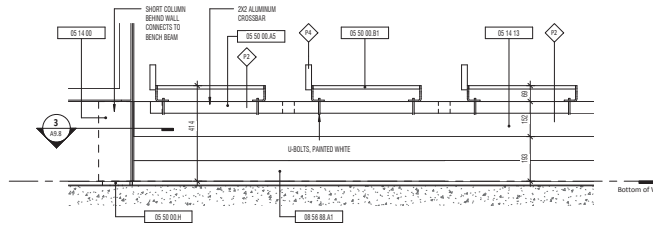



2 BENCH ELEVATION DETAIL  
A1.3/04.8 1:10

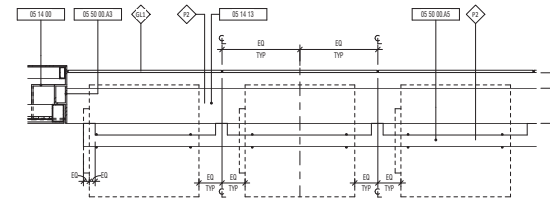


4 BENCH PLAN DETAIL  
A1.3/04.8 1:10

KEYNOTE LEGEND	
NO.	DESCRIPTION
05 14 00	STRUCTURAL ALUMINUM FRAMING
05 14 13	ARCHITECTURALLY EXPOSED STRUCTURAL ALUMINUM FRAMING
05 50 00 A1	5mm ALUMINUM PLATE
05 50 00 A3	6.4mm ALUMINUM PLATE
05 50 00 A5	ALUMINUM EXTRUSION
05 50 00 B8	ALUMINUM FRAMING
05 50 00 B1	BENCH SEATS
05 50 00 7	ALUMINUM BIKE SYMBOL
05 50 00 H	ALUMINUM STUB SHAFT CONNECTION
07 54 20 A1	PVC MEMBRANE ROOF ON 22mm PLYWOOD DECK
08 56 88 A1	CUSTOM ALUMINUM GLAZING SHOE
08 80 00 G1	10MM CLEAR TEMPERED GLASS WITH PYROLYTIC LOW-E COATING


# GO BIKE SYMBOL

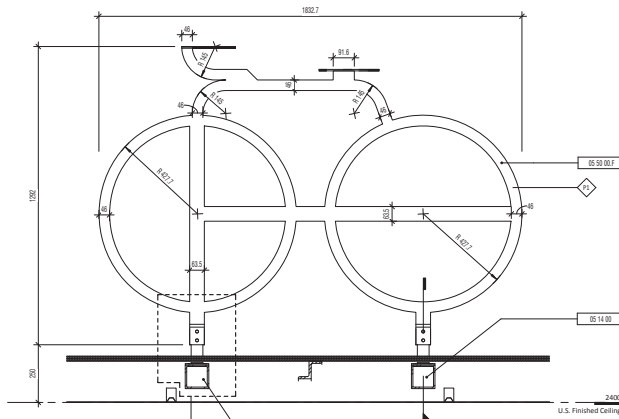


5 BIKE SYMBOL LONG ELEVATION  
A4.3/04.8 1:10

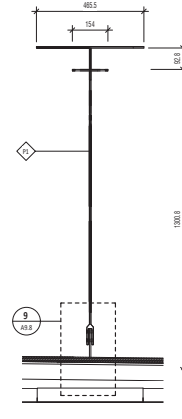


6 BIKE SYMBOL SHORT ELEVATION  
A4.3/04.8 1:10

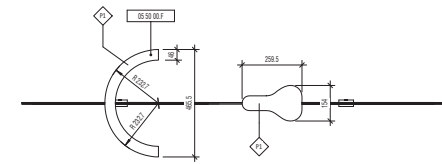

7 BIKE PLAN DETAIL  
A4.3/04.8 1:10



8 BIKE SYMBOL BASE SECTION DETAIL 1  
A4.3/04.8 1:5



9 BIKE SYMBOL BASE SECTION DETAIL 2  
A4.3/04.8 1:5

### METRIC

ALL DIMENSIONS SHOWN ARE IN METERS AND/OR MILLIMETERS UNLESS OTHERWISE NOTED.

REV:	NO:	DATE:	ISSUED FOR:	REV:	DATE:

REFERENCE DRAWINGS	ISSUE	REVISIONS

DRAWN BY: JDC	DESIGNED BY: gh3
CHECKED BY: PH 2016/07/26	APPROVED BY: PH 2016/07/26
SCALE: As indicated	FULL SIZE ONLY

**gh3 architecture**  
750-55 Doughty Avenue, Toronto, ON M6J 2N6  
416 815 1751 | 416 815 1753 | www.gh3.ca



METROLINX PROJECT NO. XXXXXX		
GO SHELTER DESIGNS GENERAL FURNISHINGS DETAILS		
CONTRACT NO: R0G-2014- CGN-061	DRAWING NO: A9.8	REV. SHEET 0.



### LUMINAIRE SYMBOLS

	SURFACE / RECESSED LUMINAIRE LETTER DENOTES TYPE. TYPICAL FOR ALL LIGHTS
	SURFACE / RECESSED DOWN LIGHT - SQUARE SHAPE
	SURFACE / RECESSED DOWN LIGHT - ROUND SHAPE
	WALL MOUNT LUMINAIRE - LINEAR
	WALL MOUNT LUMINAIRE - ROUND SHAPE
	WALL MOUNT LUMINAIRE - SQUARE SHAPE
	SURFACE MOUNT STRIP LUMINAIRE
	TRACK LIGHTING - TRIANGLES REPRESENT NUMBER OF HEADS
	NIGHT LIGHT
	SINGLE LUMINAIRE EXTERIOR LAMP STANDARD
	DOUBLE LUMINAIRE EXTERIOR LAMP STANDARD
	LANDSCAPE SPOT LIGHT
	EMERGENCY LIGHTING BATTERY PACK
	EMERGENCY LIGHTING BATTERY PACK WITH REMOTE HEADS
	EMERGENCY LOW VOLTAGE REMOTE HEAD - WALL MOUNTED
	EMERGENCY LOW VOLTAGE REMOTE HEAD - CEILING MOUNTED
	EXIT LIGHT - CEILING MOUNTED LINES OR ARROWS ON BOTH SIDES INDICATED DOUBLE SIDED SIGN, TYPICAL
	EXIT LIGHT - WALL MOUNTED
	EXIT LIGHT WITH REMOTE HEADS - CEILING MOUNTED
	EXIT LIGHT WITH REMOTE HEADS - WALL MOUNTED

### LIGHTING CONTROL

	LINE VOLTAGE SWITCH: S - 3 WAY 4 - 4 WAY D - DIMMER F - FAN SWITCH P - LOW FREQ LIGHT V - VARIABLE SPEED T - TIMER X - SWITCHING CIRCUIT
	LINE VOLTAGE OCCUPANCY SENSOR - WALL MOUNTED
	LINE VOLTAGE OCCUPANCY SENSOR - CEILING MOUNTED
	LINE VOLTAGE COMBINATION OCCUPANCY SENSOR AND SWITCH
	LOW VOLTAGE SWITCH
	LOW VOLTAGE MASTER SWITCH
	LOW VOLTAGE COMBINATION OCCUPANCY SENSOR AND SWITCH
	LOW VOLTAGE OCCUPANCY SENSOR - WALL MOUNTED
	LOW VOLTAGE OCCUPANCY SENSOR - CEILING MOUNTED
	PHOTOCELL
	TIME CLOCK

### COMMUNICATIONS SYMBOLS

	DATA OUTLET
	TELEPHONE OUTLET
	CONVENTION DATA - TELEPHONE OUTLET
	CATV OUTLET
	SPECIAL PURPOSE COMMUNICATIONS OUTLET
	WIRELESS ACCESS POINT
	PATCH PANEL
	COMMUNICATIONS DATA RACK

### SOUND SYSTEM SYMBOLS

	MICROPHONE
	PAGING STATION
	AMBIENT NOISE LEVEL SENSOR
	AMPLIFIER
	SPEAKER - CEILING MOUNTED
	SPEAKER - WALL MOUNTED
	VOLUME CONTROL
	SOUND MASKING SPEAKER
	SOUND SYSTEM HORN
	SOUND SYSTEM BUZZER
	SOUND SYSTEM BELL
	LOCAL INTERCOM MASTER STATION
	LOCAL INTERCOM STAFF STATION
	LOCAL INTERCOM DOOR STATION

### POWER SYMBOLS

	15AMP 125 VOLT WALL MOUNT / COUNTER HEIGHT DUPLEX RECEPTACLE
	15AMP 125 VOLT WALL MOUNT / COUNTER HEIGHT GROUND FAULT CIRCUIT INTERRUPTER (GFI) DUPLEX RECEPTACLE
	15AMP 125 VOLT WALL MOUNT / COUNTER HEIGHT ISOLATED GROUND (IG) DUPLEX RECEPTACLE
	15AMP 125 VOLT WALL MOUNT / COUNTER HEIGHT ARC FAULT CIRCUIT INTERRUPTER (AFCI) DUPLEX RECEPTACLE
	15AMP 125 VOLT WALL MOUNT / COUNTER HEIGHT SWITCHED DUPLEX RECEPTACLE
	15AMP 125 VOLT WALL MOUNT / COUNTER HEIGHT QUAD RECEPTACLE
	15AMP 125 VOLT WALL MOUNT / COUNTER HEIGHT GROUND FAULT CIRCUIT INTERRUPTER (GFI) QUAD RECEPTACLE
	15AMP 125 VOLT WALL MOUNT / COUNTER HEIGHT SINGLE RECEPTACLE
	20AMP 125 VOLT WALL MOUNT / COUNTER HEIGHT T-SLOT DUPLEX RECEPTACLE
	20AMP 125 VOLT WALL MOUNT / COUNTER HEIGHT T-SLOT QUAD RECEPTACLE
	20AMP 125 VOLT WALL MOUNT / COUNTER HEIGHT GROUND FAULT CIRCUIT INTERRUPTER (GFI) T-SLOT DUPLEX RECEPTACLE
	20AMP 125 VOLT WALL MOUNT / COUNTER HEIGHT T-SLOT QUAD RECEPTACLE
	20AMP 125 VOLT WALL MOUNT / COUNTER HEIGHT GROUND FAULT CIRCUIT INTERRUPTER (GFI) T-SLOT QUAD RECEPTACLE
	208 VOLT WALL MOUNT / COUNTER HEIGHT SINGLE RECEPTACLE
	DIRECT EQUIPMENT CONNECTION AS NOTED ON PLAN
	SPECIAL RECEPTACLE AS NOTED ON PLAN
	PACK POLE
	ELECTRICAL JUNCTION BOX
	GROUNDING ROD
	GROUNDING BAR
	CLOCK - WALL MOUNTED
	CLOCK - CEILING MOUNTED
	PARKING LOT RECEPTACLE - SINGLE / DOUBLE
	ELECTRIC BASEBOARD HEATER # DENOTES UNIT IDENTIFICATION
	208 VOLT RECESSED ELECTRICAL PANEL
	600 VOLT RECESSED ELECTRICAL PANEL
	208 VOLT SURFACE MOUNT ELECTRICAL PANEL
	600 VOLT SURFACE MOUNT ELECTRICAL PANEL
	MAIN / CENTRAL DISTRIBUTION CENTER OR SMARTGEAR
	ELECTRICAL MOTOR CONNECTION
	ELECTRICAL MOTOR CONNECTION WITH STARTER REFER TO MECHANICAL EQUIPMENT SCHEDULE FOR MORE INFORMATION
	ELECTRICAL GENERATOR
	(#) MECHANICAL EQUIPMENT TAG REFER TO EQUIPMENT SCHEDULE # DENOTES UNIT IDENTIFICATION
	(#) ELECTRICAL KEYED NOTE REFER TO SCHEDULE # DENOTES KEYED NOTE NUMBER
	CEILING MOUNTED RECEPTACLE
	FLOOR MOUNTED RECEPTACLE

### SECURITY SYSTEM SYMBOLS

	REQUEST TO EXIT
	PUSH BUTTON
	AUDIBLE PRE-ALARM WARNING DEVICE
	MOTION DETECTOR
	MAGNETIC DOOR LOCK
	LOCAL ALARM
	SECURITY ALARM KEYPAD
	INFRARED BEAM FOR RELEASING MAGNETIC DOOR LOCKS
	SECURITY GLASS BREAK SENSOR
	ELECTRIC DOOR STRIKE
	DOOR CONTACT
	SECURITY ALARM CONTROL PANEL
	CARD READER
	AUDIBLE SIREN
	CCTV CAMERA

### FIRE ALARM SYMBOLS

	SMOKE DETECTOR
	DUCT SMOKE DETECTOR
	HEAT DETECTOR
	CARBON MONOXIDE DETECTOR
	SMOKE ALARM
	MANUAL PULL STATION
	SPRINKLER TAMPER SWITCH
	SPRINKLER ALARM RESET VALVE
	SPRINKLER PRESSURE SWITCH
	SPRINKLER FLOW SWITCH
	MONITOR MODULE
	CONTROL MODULE
	ISOLATION MODULE
	STROBE LIGHT
	HORN
	COMBINATION HORN / STROBE LIGHT
	EVAC SPEAKER
	COMBINATION EVAC SPEAKER / STROBE
	BUZZER
	BELL
	FIREMAN'S HANDSET
	DOOR HOLDER
	FIRE ALARM TERMINATION CABINET
	REMOTE ANNUNCIATION PANEL
	FIRE ALARM CONTROL PANEL
	CENTRAL ALARM CONTROL FACILITY

### SINGLE LINE SYMBOLS

	BREAKER
	FUSE
	DRAW OUT BREAKER
	DRAW OUT FUSE
	SOLID SWITCH DISCONNECT SWITCH
	INTERNAL FUSED DISCONNECT
	INTERNAL MOTOR STARTER
	EXTERNAL SOLID DISCONNECT SWITCH
	EXTERNAL FUSED DISCONNECT SWITCH
	CONTACTOR
	UNINTERRUPTIBLE POWER SUPPLY
	TRANSIENT VOLTAGE SURGE PROTECTOR
	SHUNT TRIP RELAY
	2 HOUR FIRE RATED CABLES
	UTILITY METER
	INFORMATION METER
	GROUND CONNECTION - EARTH POTENTIAL
	CURRENT TRANSFORMER
	ELECTRICAL TRANSFORMER - DELTA / WYE
	ELECTRICAL PANEL BOARD
	AUTOMATIC TRANSFER SWITCH

### ABBREVIATIONS

A	AMPERE	MCB	MAIN CIRCUIT BREAKER
AT	AMPERE TRIP	MM	MINIMUM HEIGHT
AF	AMPERE FRAME	MLO	MAIN LISTS ONLY
AFB	ABOVE FINISHED FLOOR	MOCF	MINIMUM OVERCURRENT PROTECTION
AWG	AMERICAN WIRE GAUGE	MTD	MOVING
C	CIRCUIT	N	NEUTRAL
CACF	CENTRAL ALARM CONTROL FACILITY	N	NEUTRAL
CB	CIRCUIT BREAKER	PNL	PANELBOARD
CCT	CIRCUIT	QTY	QUANTITY
EC	EMPTY CONDUIT	REC	RECESSED
EA	EXISTING TO REMAIN	RL	RELOCATE EXISTING DEVICE
FLA	FULL LOAD AMPS	RM	REMOVE EXISTING DEVICE
FLS	FUSED SAFETY SWITCH	RR	REMOVE AND REPLACE WITH NEW DEVICE
GFI	GROUND FAULT INTERRUPTER	V	VOLTAGE / VOLTS
GND	GROUND	W	WATTS
HP	HORSEPOWER	WP	WEATHERPROOF
IG	ISOLATED GROUND	XFMR	TRANSFORMER
KVA	KILOVOLT AMPERES		
MCA	MINIMUM CIRCUIT AMPACITY		

### SHEET LIST

No.	DESCRIPTION
E0.1	ELECTRICAL SYMBOLS LEGEND
E0.2	ELECTRICAL INTERCONNECTION DIAGRAM
E1.1	SHELTER TYPE 1 - RAIL LINE STATIONS PASSENGER SHELTER - POWER AND LIGHTING PLANS
E1.2	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER - POWER AND LIGHTING PLANS
E2.1	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER - HEAT TRACE PLAN
E3.1	SHELTER TYPE 3 - ON STREET BUS PASSENGER SHELTER - POWER PLAN
E4.1	SHELTER TYPE 4 - SMALL BIKE SHELTER - POWER AND LIGHTING PLANS
E5.1	SHELTER TYPE 5 - LARGE BIKE SHELTER - POWER AND LIGHTING PLANS
E6.1	SHELTER TYPE 6 - AMENITIES SHELTER - POWER AND LIGHTING PLANS

TAG	DESCRIPTION	MODEL	LOCATION	POWER	VOLTAGE	LAMP TYPE	INITIAL ILLUMINANCE	CCT	CRF	REMARKS	QUANTITY
A1	LINEAR LED LUMINAIRE WITH MINIMUM IP68 INGRESS PROTECTION, DIFFUSE LENS, AND 0-10 V DIMMABLE DRIVER - 646 mm IN LENGTH	LED LINEAR - XOOULIGHT HYDRA SERIES	SHELTER - TYPE 1	25 VA	120 V	LED	2000 lm	4000 K	85+		3
A2	LINEAR LED LUMINAIRE WITH MINIMUM IP68 INGRESS PROTECTION, DIFFUSE LENS, AND 0-10 V DIMMABLE DRIVER - 583.5 mm IN LENGTH	LED LINEAR - XOOULIGHT HYDRA SERIES	SHELTER - TYPE 2	38 VA	120 V	LED	3000 lm	4000 K	85+		18
A4	LINEAR LED LUMINAIRE WITH MINIMUM IP68 INGRESS PROTECTION, DIFFUSE LENS, AND 0-10 V DIMMABLE DRIVER - 583.5 mm IN LENGTH	LED LINEAR - XOOULIGHT HYDRA SERIES	SHELTER - TYPE 4	13 VA	120 V	LED	1000 lm	4000 K	85+		4
A5	LINEAR LED LUMINAIRE WITH MINIMUM IP68 INGRESS PROTECTION, DIFFUSE LENS, AND 0-10 V DIMMABLE DRIVER - 583.5 mm IN LENGTH	LED LINEAR - XOOULIGHT HYDRA SERIES	SHELTER - TYPE 5	13 VA	120 V	LED	1000 lm	4000 K	85+		4
A6	LINEAR LED LUMINAIRE WITH MINIMUM IP68 INGRESS PROTECTION, DIFFUSE LENS, AND 0-10 V DIMMABLE DRIVER - 583.5 mm IN LENGTH	LED LINEAR - XOOULIGHT HYDRA SERIES	SHELTER - TYPE 6	32 VA	120 V	LED	2000 lm	4000 K	85+		6

**METRIC**  
ALL DIMENSIONS SHOWN  
ARE IN METERS (M) UNLESS  
OTHERWISE NOTED

REFERENCE DRAWINGS		ISSUED			REVISIONS			
No.	DATE	DESCRIPTION	No.	DATE	DESCRIPTION	NO.	DATE	DESCRIPTION

DRAWN BY: BRM  
DESIGNED BY: INTEGRAL GROUP  
CHECKED BY: CUB  
2016/07/26  
APPROVED BY: BG  
2016/07/26  
SCALE: 1 : 1  
FULL SIZE ONLY

DATE: 08/11/16  
BY: BRM



METROLINX PROJECT NO. XXXXXX

GO - Metrolinx Shelters


ELECTRICAL SYMBOLS LEGEND

CONTRACT NO: R00-2014- CON-06.1	DRAWING NO: E0.1	REV: 0.	SHEET
---------------------------------------	---------------------	------------	-------

CUSTOM POWER CABINET LOCATED INSIDE INFO-WALL.

EQUIPMENT AND DEVICES LOCATED IN SHELTER OUTSIDE OF INFO-WALL.

CUSTOM COMMUNICATION CABINET LOCATED INSIDE INFO-WALL.

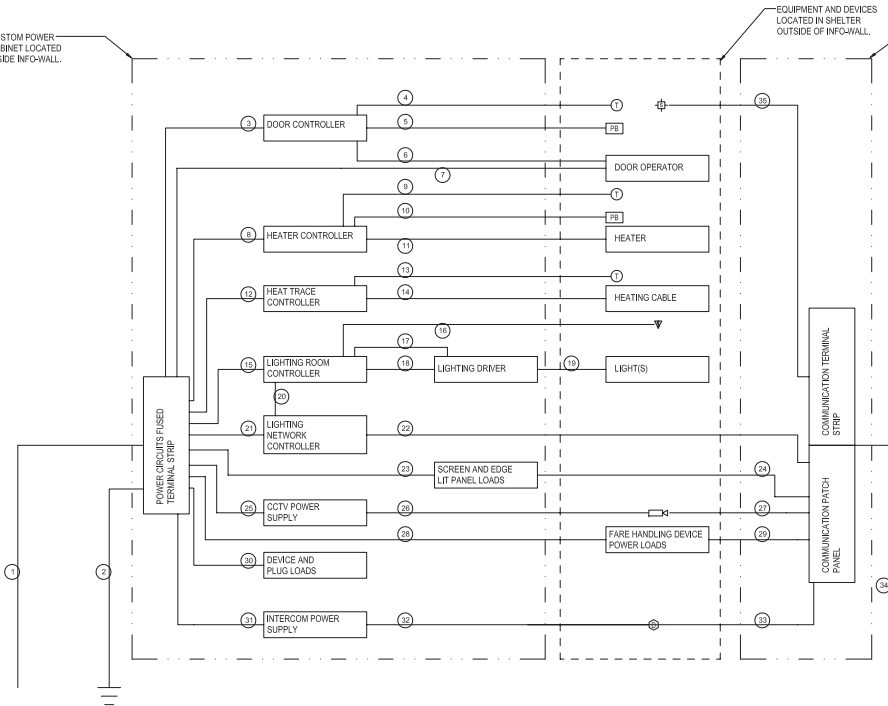


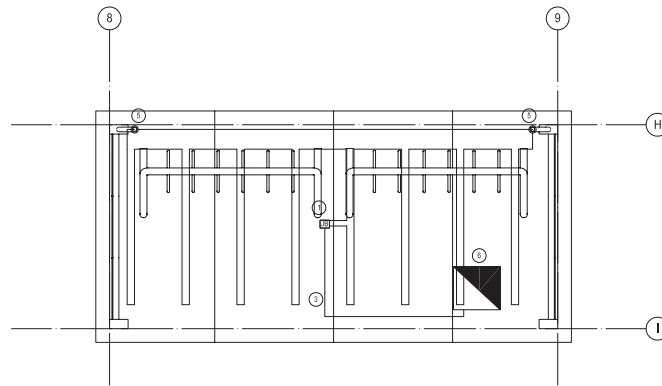
- 1 INCOMING POWER CIRCUITS. PROVIDE 1 27mm CONDUIT OF SUFFICIENT LENGTH TO RUN FROM CUSTOM BUILT ELECTRICAL CABINET TO 1m PAST THE EDGE OF THE SHELTER. CONDUIT INSTALLATION AND PROVISION OF WIRING BY OTHERS AT TIME OF INSTALLATION ON SITE.
- 2 ELECTRICAL SYSTEM GROUNDING. PROVIDE 1 27mm CONDUIT OF SUFFICIENT LENGTH TO RUN FROM CUSTOM BUILT ELECTRICAL CABINET TO 1m PAST THE EDGE OF THE SHELTER. PROVIDE A GROUNDING BAR INSIDE ELECTRICAL CABINET FOR FUTURE CONNECTION TO GROUNDING SYSTEM. GROUND ROD, GROUND WIRE AND CONDUIT INSTALLATION WILL BE BY OTHERS AT TIME OF INSTALLATION ON SITE.
- 3 15A 120V CIRCUIT FOR DOOR CONTROLLER. SHARE CIRCUIT WITH CCTV POWER SUPPLY AND INTERCOM POWER SUPPLY. PROVIDE A 15A FUSE IN TERMINAL STRIP, AND #12AWG CONDUCTORS FROM STRIP TO CONTROLLER.
- 4 LOW VOLTAGE CONTROL WIRING FROM LOW-VOLTAGE THERMOSTAT TO DOOR CONTROLLER. PROVIDE #14AWG CONDUCTORS FROM THERMOSTAT TO DOOR CONTROLLER.
- 5 LOW VOLTAGE CONTROL WIRING FROM PUSH BUTTON TO DOOR CONTROLLER. PROVIDE #14 AWG CONDUCTORS FROM THERMOSTAT TO DOOR CONTROLLER.
- 6 LOW VOLTAGE CONTROL WIRING FROM DOOR CONTROLLER TO DOOR OPERATOR. PROVIDE #14 AWG CONDUCTORS FROM CONTROLLER TO DOOR OPERATOR.
- 7 15A 120V CIRCUIT TO DOOR OPERATOR(S). PROVIDE A 15 A FUSE IN TERMINAL STRIP, AND #12AWG CONDUCTORS FROM TERMINAL STRIP TO OPERATOR. SHARE ONE CIRCUIT FOR ALL DOOR OPERATORS.
- 8 20A 208V CIRCUIT FOR INFRARED HEATER. PROVIDE A 20 A FUSE IN TERMINAL STRIP AND #12AWG CONDUCTORS FROM TERMINAL STRIP TO CONTROLLER. PROVIDE A DEDICATED CIRCUIT AND CONTROLLER FOR EACH HEATER.
- 9 LOW VOLTAGE CONTROL WIRING FROM THERMOSTAT TO HEATER CONTROLLER. PROVIDE #14AWG CONDUCTORS FROM THERMOSTAT TO ALL CONTROLLERS.
- 10 LOW VOLTAGE CONTROL WIRING FROM PUSH BUTTON TO HEATER CONTROLLER. PROVIDE #14AWG CONDUCTORS FROM PUSH BUTTON TO ALL CONTROLLERS.
- 11 208V POWER WIRING FROM CONTROLLER TO INFRARED HEATER. PROVIDE #10AWG CONDUCTORS FROM CONTROLLER TO HEATER.
- 12 20A 208V CIRCUIT FOR ELECTRIC HEAT TRACE. PROVIDE 20 A FUSE IN TERMINAL STRIP, AND #12AWG CONDUCTORS FROM TERMINAL STRIP TO CONTROLLER.
- 13 LOW VOLTAGE SENSOR WIRE. INSTALL HEAT TRACE TEMPERATURE SENSOR ON SHELTER ROOF. PROVIDE #14AWG CONDUCTORS FROM SENSOR TO CONTROLLER.
- 14 208V POWER WIRING FROM CONTROLLER TO HEATING CABLE CONNECTION. MOUNT WEATHERPROOF JUNCTION BOX ON SHELTER ROOF FOR CONNECTION TO HEATING CABLE. PROVIDE #10AWG CONDUCTORS FROM CONTROLLER TO JUNCTION.
- 15 15A 120V CIRCUIT FOR LIGHT FIXTURES. PROVIDE 15 A FUSE IN TERMINAL STRIP, AND #12AWG CONDUCTORS FROM TERMINAL STRIP TO ROOM CONTROLLER. PROVIDE A DEDICATED CIRCUIT TO THE ROOM CONTROLLER FOR EACH DRIVER SUPPLIED WITH THE SHELTER.
- 16 LOW VOLTAGE LIGHTING CONTROL WIRING. PROVIDE #14AWG CONDUCTORS FROM LIGHTING CONTROL DEVICES TO ROOM CONTROLLER.
- 17 0-10V DIMMING SIGNAL FROM ROOM CONTROLLER TO DRIVER(S). PROVIDE WIRING AS PER MANUFACTURER'S RECOMMENDATIONS.
- 18 15A 120V CIRCUIT FROM ROOM CONTROLLER TO DRIVER(S). PROVIDE #12AWG CONDUCTORS FROM CONTROLLER TO EACH DRIVER.
- 19 LOW VOLTAGE POWER WIRING FROM DRIVER(S) TO LIGHT FIXTURES. PROVIDE #12AWG CONDUCTORS FROM DRIVER(S) TO LIGHT FIXTURES.
- 20 LOW VOLTAGE LIGHTING CONTROL WIRING. PROVIDE WIRING AS PER MANUFACTURER'S RECOMMENDATIONS.
- 21 15A 120V CIRCUIT FOR NETWORK LIGHTING CONTROLLER. PROVIDE 15A FUSE IN TERMINAL STRIP AND #12AWG CONDUCTORS FROM TERMINAL STRIP TO CONTROLLER.
- 22 CAT5 DATA CABLE FROM NETWORK LIGHTING CONTROLLER TO PATCH PANEL IN CUSTOM ELECTRICAL ENCLOSURE.
- 23 15A 120V CIRCUIT(S) FOR EDGE LIT LED PANELS AND LCD SCREENS. PROVIDE ONE CIRCUIT FOR EVERY THREE SCREENS. FOR EACH CIRCUIT PROVIDE 15A FUSE IN TERMINAL STRIP AND #12AWG CONDUCTORS FROM TERMINAL STRIP TO DEVICE.
- 24 CAT5 DATA CABLE FROM EACH LCD SCREEN TO PATCH PANEL IN CUSTOM ELECTRICAL ENCLOSURE.
- 25 15A 120V CIRCUIT FOR CCTV POWER SUPPLY. SHARE A CIRCUIT WITH INTERCOM POWER SUPPLY AND DOOR CONTROLLER. PROVIDE 15A FUSE IN TERMINAL STRIP AND #12AWG CONDUCTORS FROM TERMINAL STRIP TO POWER SUPPLY.
- 26 LOW VOLTAGE POWER WIRING. PROVIDE #14AWG WIRING FROM CCTV POWER SUPPLY TO EACH CCTV CAMERA.
- 27 CAT5 CABLE FROM EACH CCTV CAMERA TO PATCH PANEL IN CUSTOM ENCLOSURE.
- 28 15A 120V CIRCUIT FOR FARE HANDLING DEVICES. PROVIDE ONE CIRCUIT FOR ALL HANDLING DEVICES. PROVIDE 15A FUSE IN TERMINAL STRIP, AND #12 AWG CONDUCTORS FROM TERMINAL STRIP TO HANDLING DEVICE.
- 29 CAT5 CABLE FROM EACH FARE HANDLING DEVICE TO PATCH PANEL IN CUSTOM ENCLOSURE.
- 30 15A 120V CIRCUIT FOR INFO-WALL MOUNTED DEVICES AND PLUGS. PROVIDE 1 CIRCUIT FOR ALL DEVICES. PROVIDE 15A FUSE IN TERMINAL STRIP, AND #12 AWG CONDUCTORS FROM TERMINAL STRIP TO DEVICES.
- 31 15A 120V CIRCUIT FOR INTERCOM POWER SUPPLY. SHARE A CIRCUIT WITH DOOR CONTROLLER AND CCTV POWER SUPPLY. PROVIDE 15A FUSE IN TERMINAL STRIP, AND #12AWG CONDUCTORS FROM TERMINAL STRIP TO POWER SUPPLY.
- 32 LOW VOLTAGE POWER WIRING FROM INTERCOM POWER SUPPLY TO INTERCOM STATION. PROVIDE #14AWG CONDUCTORS FROM POWER SUPPLY TO INTERCOM STATION.
- 33 CAT5 CABLE FROM INTERCOM STATION TO PATCH PANEL IN CUSTOM ENCLOSURE.
- 34 INCOMING DATA AND SPEAKER CABLING. PROVIDE A 35mm CONDUIT OF SUFFICIENT LENGTH TO RUN FROM CUSTOM BUILT ELECTRICAL CABINET TO 1m PAST THE EDGE OF THE SHELTER. CONDUIT INSTALLATION AND PROVISION OF WIRING BY OTHERS AT TIME OF INSTALLATION ON SITE.
- 35 SPEAKER CABLING. PROVIDE #14AWG CONDUCTOR FROM LOW VOLTAGE TERMINAL STRIP TO SPEAKER.

1 ELECTRICAL INTERCONNECTION DIAGRAM  
R.T.S.


METRIC  
ALL DIMENSIONS SHOWN  
ARE IN METERS UNLESS  
OTHERWISE NOTED

METROLINX PROJECT NO. XXXXXX

REFERENCE DRAWINGS		ISSUED		REVISIONS		DRAWN BY:	DESIGNED BY:		GO - Metrolinx Shelters	
No.	DATE	No.	DATE	No.	DATE	C.S.	C.S.		ELECTRICAL INTERCONNECTION DIAGRAM	
1	2016/07/26	1	2016/07/26						CONTRACT NO: R00-2014-061	
2	2016/07/26	2	2016/07/26						DRAWING NO: E0.2	
3	2016/07/26	3	2016/07/26					REV. SHEET		
								0.		



1 SHELTER TYPE 4 - ELECTRICAL LINE VOLTAGE PLAN  
1:25

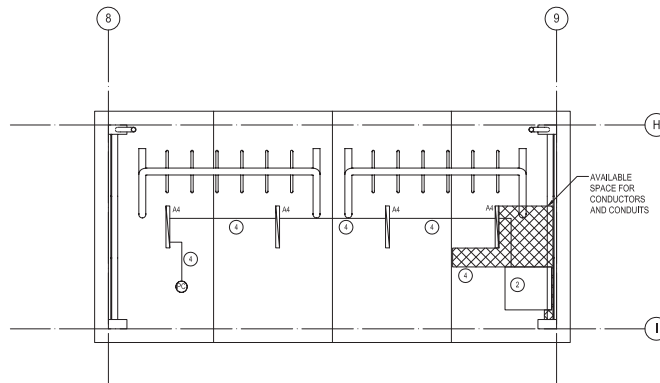

2 SHELTER TYPE 4 - ELECTRICAL LOW VOLTAGE PLAN  
1:25

- DRAWING KEYNOTES:**
- 1 EXTERIOR ROOF MOUNTED WEATHER PROOF JUNCTION BOX FOR HEAT TRACE SYSTEM.
  - 2 PROVIDE CUSTOM COMMUNICATION ENCLOSURE IN THE CEILING BEHIND ACCESS HATCH WITH DIMENSIONS OF 400mm WIDE X 1050mm HIGH AND 125mm DEEP.
  - 3 CONSOLIDATE WIRING INTO ONE OF TWO MULTI-CONDUCTOR ARMoured CABLES FOR ALL #12AWG CONDUCTORS.
  - 4 CONSOLIDATE ALL #14AWG CONDUCTORS INTO ONE OF THREE MULTI-CONDUCTOR ARMoured CABLES.
  - 5 INSTALL HEAT TRACE DOWN RAIN WATER LEADER TO GRADE.
  - 6 PROVIDE CUSTOM POWER ENCLOSURE IN THE CEILING BEHIND ACCESS HATCH WITH DIMENSIONS OF 810mm WIDE X 1050mm HIGH AND 125mm DEEP.

- DRAWING NOTES:**
1. INSTALL HEAT TRACE PARALLEL ALONG CORRUGATION LINES, AND ACCORDING TO MANUFACTURER'S INSTRUCTIONS.
  2. ALL CONDUCTORS TO BE PART OF MULTI-CONDUCTOR ARMoured CABLES. CONDUCTOR CONSOLIDATION MUST TAKE PLACE IN CEILING MOUNTED DEVICE BOX, NO ACCESS PANELS FOR ADDITIONAL JUNCTION BOXES ARE ALLOWED.

**NOTE:**  
THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON METROLINX GO TRANSIT DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SITE SPECIFIC CONDITIONS AND INTERDISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS.

METROLINX PROJECT NO. XXXXXX

**METRIC**  
ALL DIMENSIONS SHOWN  
ARE IN METERS UNLESS  
OTHERWISE NOTED


REFERENCE DRAWINGS		ISSUED		REVISIONS		DRAWN BY: BRM	DESIGNED BY: INTEGRAL GROUP	CHECKED BY: CvB 2016/07/26	APPROVED BY: BG 2016/07/26	SCALE: FULL SIZE ONLY As indicated	DATE:	SHEET
No.	DATE	No.	DATE	No.	DATE							
		1	2016/07/26									
		2	2016/07/26									
		3	2016/07/26									
		4	2016/07/26									
		5	2016/07/26									
		6	2016/07/26									
REV:		REV:										




GO - Metrolinx Shelters

SHELTER TYPE 4 - SMALL BIKE SHELTER - POWER AND LIGHTING PLANS

CONTRACT NO: R00-2014- CON-061	DRAWING NO: E4.1	REV: 0	SHEET
--------------------------------------	---------------------	--------	-------

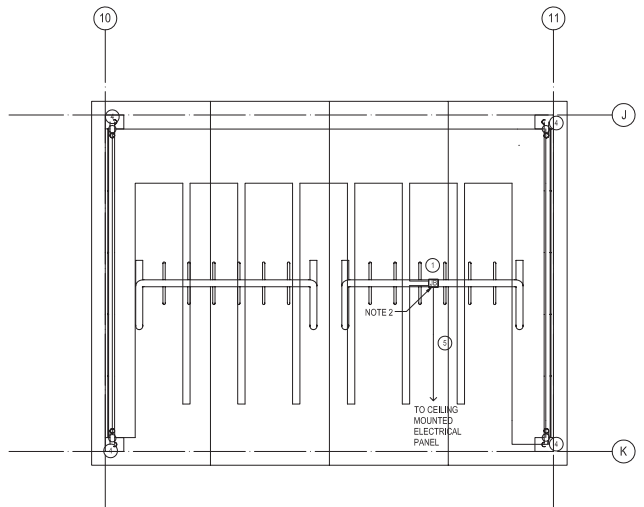

1 SHELTER TYPE 5 - ELECTRICAL LINE VOLTAGE PLAN  
1:25

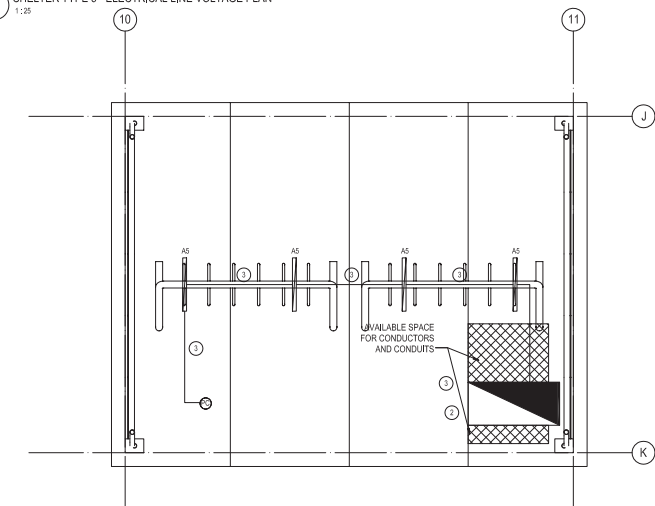

2 SHELTER TYPE 5 - ELECTRICAL LOW VOLTAGE PLAN  
1:25

- DRAWING KEYNOTES:**
- 1 EXTERIOR ROOF MOUNTED WEATHER PROOF JUNCTION BOX FOR HEAT TRACE SYSTEM.
  - 2 PROVIDE HEATED CUSTOM CABINET MOUNTED IN THE CEILING BEHIND ACCESS AN HATCH. ENCLOSURE TO BE 470mm WIDE X 1000mm HIGH X 125mm DEEP.
  - 3 CONSOLIDATE LOW VOLTAGE WIRING INTO ONE MULTI-CONDUCTOR ARMoured CABLES FOR ALL #14AWG CONDUCTORS.
  - 4 INSTALL HEAT TRACE DOWN RAIN WATER LEADER TO GRADE.
  - 5 CONSOLIDATE WIRING INTO ONE OF TWO MULTI-CONDUCTOR ARMoured CABLES FOR ALL #12AWG CONDUCTORS.

- DRAWING NOTES:**
1. INSTALL HEAT TRACE PARALLEL ALONG CORRUGATION LINES, AND ACCORDING TO MANUFACTURER'S INSTRUCTIONS.
  2. ALL CONDUCTORS TO BE PART OF MULTI-CONDUCTOR ARMoured CABLES. CONSIDERATION MUST TAKE PLACE IN CEILING MOUNTED DEVICE BOX. NO ACCESS PANELS FOR ADDITIONAL JUNCTION BOXES ARE ALLOWED.

**METRIC**  
ALL DIMENSIONS SHOWN  
ARE IN METERS UNLESS  
OTHERWISE NOTED

**NOTE:**  
THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON METROLINX GO TRANSIT DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SITE SPECIFIC CONDITIONS AND INTER-DISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS.

METROLINX PROJECT NO. XXXXXX

REFERENCE DRAWINGS		ISSUED		REVISIONS	
No.	DATE	No.	DATE	No.	DATE

DRAWN BY: BRM  
DESIGNED BY: INTEGRAL GROUP  
CHECKED BY: CvB  
2016/07/26  
APPROVED BY: BG  
2016/07/26  
SCALE: FULL SIZE ONLY  
As indicated



**GO - Metrolinx Shelters**  
SHELTER TYPE 5 - LARGE BIKE SHELTER - POWER AND LIGHTING PLANS  
CONTRACT NO: R00-2014-CON-061  
DRAWING NO: E5.1  
REV: 0  
SHEET

METRIC

ALL DIMENSIONS SHOWN ARE IN METERS AND/OR MILLIMETERS UNLESS OTHERWISE NOTED

DRAWING LEGEND AND ABBREVIATIONS

UNLESS OTHERWISE NOTED, DESIGN LOADS SHOWN ARE SPECIFIED UNFACTORED LOADS. TO BE USED FOR ALL DESIGN, FOR POINT LOADS, IF ONLY ONE LOAD IS GIVEN, CONSIDER THE LOAD FOR WIND AND SNOW LOADS TO BE USED FOR SLS DESIGN. REFER TO MATERIAL AND DESIGN DATA NOTES.

Table with 2 columns: Abbreviation and Definition. Includes terms like AB (ANCHOR BOLT), AESS (ARCHITECTURALLY EXPOSED STRUCTURAL STEEL), AL (FACTORED AXIAL LOAD IN N), ALT. (ALTERNATE), ANCH. (ARCHITECTURAL), B. BOT. (BOTTOM), BOP (BORED CONCRETE PILE), BEP (BOTTOM EACH WAY), BIL (BOTTOM LOWER LAYER), BOC (BORED CONCRETE PILE), BOF (BORED CONCRETE PILE), BOP (BORED CONCRETE PILE), BSMT (BASEMENT), BUL (BOTTOM UPPER LAYER), BLP (BOTTOM OF UNDERPINNING), CA (COLUMN ABOVE ONLY (NO COLUMN BELOW)), CAB (CARRIER), CANT. (CANTILEVER), CB (COLUMN BELOW), C/C (CENTRE TO CENTRE), C/C (CUT OFF ELEMENT FOR FILES), C/C (CONCRETE REPROOFED), C/J (CONCRETE JOINT), CL (CLEAR), C (CENTRELINE), CNT (STEEL DECK CORE NOMINAL THICKNESS), COMP. (COMPOSITE), CONSTR./T. (CONSTRUCTION JOINT), COL. (COLUMN), CONC. (CONCRETE), CONT. (CONTINUOUS), CP (CONNECTION PLATE), CYS (SEE GENERAL NOTES), CSS (SEE GENERAL NOTES), DCA (DRILLED CONCRETE ANCHOR), DET. (DETAIL), D.F.A. (DOUGLAS FIR LARCH), DIA. (DIAMETER), DIM. (DIMENSION), DL (DEAD LOAD IN kN/m²), DAM (DRILLED MASONRY ANCHOR), DN. (DOWN), DD. (DITTO), DR. (DEEP), DWG. (DRAWING), DWL. (DOWEL), EA. (EACH), ECR (EPOXY COATED REINFORCEMENT), EE (EACH END), EF (EACH FACE), EL. EXP. JT. (EXPANSION JOINT), EL. ELEV. (ELEVATION), ENDS. (ENDS), EQ. (EQUAL), EX. CABL. (EXPANDING), EXP. JT. (EXPANSION JOINT), FD (FLOOR DRAIN), FF (FAR FACE), FIN. (FINISHED), FL. (FLOOR), FMC (FULL MOMENT CONNECTION), FTG. (FOOTING), Fy (COMPRESSIVE STRENGTH OF CONC IN MPa), fy (YIELD STRENGTH IN MPa), GALV. (GALVANIZED STEEL), GB (GRADE BEAM), GRG. (GROUT), H. (TOTAL THICKNESS), H. HOR. (HORIZONTAL), HSG (HOT DIPPED GALVANIZED), HSB (HORIZONTAL EACH FACE), HSP (HOOK-AND-HOOK EACH END), H-T (HOLE THROUGH CONCRETE BEAM), H-T (HOLE THROUGH STEEL BEAM), HCB (HORIZONTAL IN CENTRE), HCK (HOOK), HP (HIGH POINT), IB (INTEGRITY BARS INTERIOR), IE (INTEGRITY BARS EXTERIOR), JG (JOIST GIRDER), K (TENSION DEVELOPMENT LENGTH OF REBAR), L (SINGLE ANGLE), JL (DOUBLE ANGLE), LE (LEFT END), LGL (LONG LENGTH), LLS (UPPER LEVEL BRACKET), LL (LOWER LEVEL BRACKET), LLH (LONG LEG HORIZONTAL), LLV (LONG LEG VERTICAL), LBY (LONG SEE VERTICAL), LSH (LONG SEE HORIZONTAL), LP (LOW POINT), MAX. (MAXIMUM), M (FACTORED MOMENT IN kN-m), MJ (MOVEMENT JOINT), MIN. (MINIMUM), MCT (MOMENT CONNECTION), MCT (FACTORED TORSION IN kN-m), NBC (NATIONAL BUILDING CODE OF CANADA), NF (NEAR FACE), NTS (NOT TO SCALE), OBC (ONTARIO BUILDING CODE), O/C (ON CENTRE), O/D (OUT TO OUT), O/P (OPENING), P (POINT LOAD IN kN), PF (FACTORED POINT LOAD IN kN), PL (PLATE), RA (ROCK ANCHOR), RE (REINFORCEMENT), REIN. (REINFORCEMENT), RE (RIGHT END), RF (RIBS FRAME), RF (FACTORED VERTICAL REACTION IN kN), RHT (FACTORED HORIZONTAL REACTION IN kN), SCA (STEP DOWN FOOTING IN DIRECTION OF ARROW), SDP (STEP DOWN FOOTING), SOL (SURFPOISED), SPT (SECTION), SBA (SIMILAR), SBJ (STEEL JOIST), SLS (SERVICEABILITY LIMIT STATE), SLR (SLAB), SL1, SL2 (SHELF ANGLE 1, ETC), SSG (SLAB ON GRADE), SPF (SPRUCE PINE FIR), STR. (STRIP), STIFF. (STIFFENER), T (THICKNESS), TOP (TOP), TEW (TOP EACH WAY), THK. (THICK), T/E (TOP LEFT END), T/L (TOP LEFT END), T/R (TOP LOWER LAYER), T/P (TOP OF FOOTING), T/P (TOP OF FILE), T/P (TOP OF FILE GAP), T/P (TOP RIGHT END), T/P (TOP UPPER LAYER), TYP. (TYPICAL), ULS (ULTIMATE LIMIT STATE), US (UNDERSE), UN. (UNLESS NOTED), UPT. (UPTURNED), V (VERTICAL BRACING), V. VEP (VERTICAL VERTICAL EACH FACE), V (FACTORED SHEAR IN kN), V (VERTICAL IN CENTRE), V. VERT. (VERTICAL), VSC (VERTICALLY SLOTTED CONNECTION TO ALLOW FOR DEFLECTION), V. BRACING (VERTICAL V BRACING), WC (WIND COLUMN), WWA (WINDOW WASHING ANCHORS), WWP (WELDED WIRE FABRIC), ZPP (ZINC RICH PAINT), X (SECTION NUMBER), Y (SECTION DRAWING REFERENCE), Z (MASONRY WALL), Z (FULLY GROUTED MASONRY WALL), Z (STRUCTURAL PRECAST CONCRETE)

STRUCTURAL DRAWING LIST

Table with 2 columns: Drawing Code and Description. Includes S0.1 - GENERAL NOTES AND DRAWING LIST, S0.1.1 - SHELTER TYPE 1 - RAIL LINE STATIONS PASSENGER SHELTERS - PLANS AND DETAIL, S2.1 - SHELTER TYPE 2 - CARPOOL LOT SHELTERS - PLANS, S2.2 - SHELTER TYPE 2 - CARPOOL LOT SHELTERS - DETAILS, S3.1 - SHELTER TYPE 3 - ON-STREET BUS SHELTERS - PLANS AND DETAILS, S4.1 - SHELTER TYPE 4 - SMALL BIKE SHELTERS - PLANS AND DETAILS, S5.1 - SHELTER TYPE 5 - LARGE BIKE SHELTERS - PLANS AND DETAILS, S6.1 - SHELTER TYPE 6 - AMENITIES SHELTERS - PLANS AND DETAILS

STRUCTURAL WORK

- 1. GENERAL
1.1. PROVIDE ALL MATERIAL AND LABOUR REQUIRED FOR THE COMPLETION OF THE WORK, BREAKDOWN OF WORK BY TRADE IS FOR GUIDANCE ONLY AND IS NOT NECESSARILY COMPLETE.
1.2. COORDINATE ALL WORK SHOWN ON THE STRUCTURAL DRAWINGS WITH ARCHITECTURAL, MECHANICAL, ELECTRICAL, ALL OTHER DISCIPLINES AND EXISTING CONDITIONS (EXISTING CONDITIONS ARE ASSUMED), REPORT ANY INCONSISTENCIES TO THE CONSULTANT BEFORE PROCEEDING WITH THE WORK.
1.3. MAKE GOOD ALL EXISTING WORK DISTURBED BY THE SHORING OPERATIONS, EXCAVATION AND OTHER CONSTRUCTION PROCEDURES.
1.4. DO NOT SCALE THESE DRAWINGS.
1.5. SEE ARCHITECTURAL DRAWINGS FOR PREPROOFING REQUIREMENTS.
2. CODES AND STANDARDS
2.1. COMPLY WITH THE REQUIREMENTS OF THE 2012 ONTARIO BUILDING CODE IN FORCE AND THE OCCUPATIONAL HEALTH AND SAFETY ACT AND REGULATIONS FOR CONSTRUCTION PROJECTS.

METROLINX PROJECT NO. XXXXXX

GO SHELTER DESIGNS
GENERAL NOTES AND
DRAWING LIST

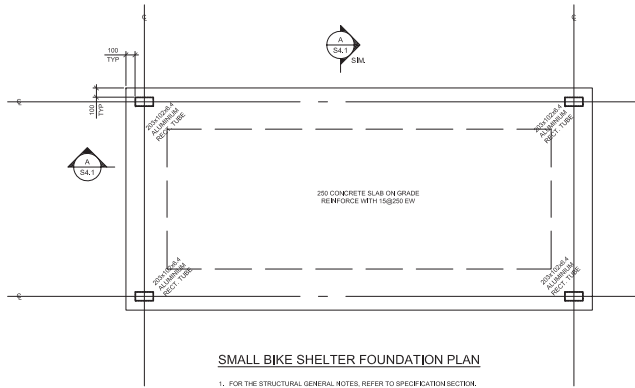


Table with columns: REFERENCE DRAWINGS, ISSUE, REVISIONS, DRAWN BY: DEB, DESIGNED BY: RYS, CHECKED BY: RYS, APPROVED BY: RYS, SCALE: 1 : 25 FULL SIZE ONLY, REV. NO., DATE, ISSUED FOR, REV. DATE.

Table with columns: CONTRACT NO: RQD-2014-CON-061, DRAWING NO: S0.1, REV. 0, SHEET


METRIC

ALL DIMENSIONS SHOWN ARE IN METERS AND/OR MILLIMETERS UNLESS OTHERWISE NOTED




**SMALL BIKE SHELTER FOUNDATION PLAN**


1. FOR THE STRUCTURAL GENERAL NOTES, REFER TO SPECIFICATION SECTION.
2. GROUT BASE PLATES AND BEARING PLATES PRIOR TO PLACING LOADS ON STRUCTURE.
3. REFER TO ARCHITECTURAL DRAWINGS FOR DIMENSIONS AND GRIDLINES.
4. REFER TO ARCH DWGS FOR SLOPE.

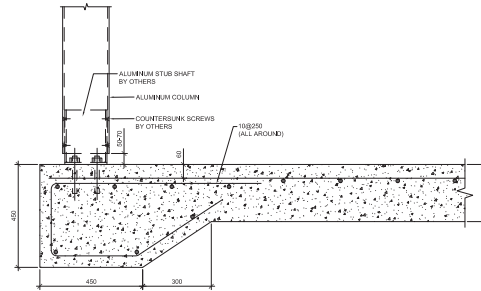

**A** TYPICAL CONCRETE BASE SECTION  
S4.1 1:10




**TYPICAL BASE PLATE CONNECTION DETAIL FOR 203x102 RECT. TUBE**  
SCALE 1:5

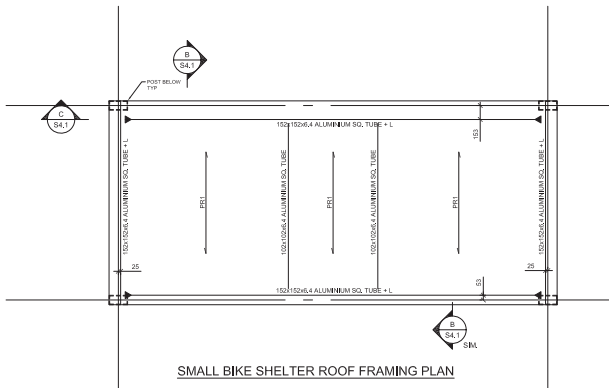


**SMALL BIKE SHELTER ROOF FRAMING PLAN**


1. FOR THE STRUCTURAL GENERAL NOTES, REFER TO SPECIFICATION SECTION.
2. FOR ROOF DATUM ELEVATION AND DIMENSIONS REFER TO ARCHITECTURAL DRAWINGS.
3. UNLESS NOTED OTHERWISE ON PLAN, DESIGN LOADS ARE:  
LIVE LOAD (SROOF) = 2.4 kN/M<sup>2</sup> MINIMUM.
4. \*PRT ON PLANS DENOTES 75 DEEP x 5.2" ALUMINUM PURLINS @ 610 ON CENTER SECURED WITH SELF DRILLING TEK SCREWS 4 x 1-1/8".
5. ▶ = MOMENT CONNECTIONS (V-BRUSH, WELDED, CERTIFIED).
6. DESIGN THE COLUMN TO BEAM CONNECTION FOR A MINIMUM COMBINED FORCES OF P=0.04N, M=0.04N·M, MY=0.04N·M, CM=0.04N.
7. THERE SHALL BE NO WELDED CONNECTION UNLESS ALLOWED AND CONFIRMED WITH THE STRUCTURAL CONSULTANT.



**B** TYPICAL ROOF BEAM  
S4.1 1:10



**C** TYPICAL SECTION  
S4.1 1:10



**ISOMETRIC VIEW OF BEAM-COLUMN CONNECTION**  
NOT TO SCALE

NOTE:  
THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON METROLINX GO TRANSIT DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SITE SPECIFIC CONDITIONS AND INTER-DISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS.

METROLINX PROJECT NO. XXXXXX

REFERENCE DRAWINGS		ISSUE		REVISIONS	
		1	2016/07/26	ISSUE FOR CONSTRUCTION	
		2	2016/07/26	ISSUE FOR CONSTRUCTION	
		3	2016/07/26	ISSUE FOR CONSTRUCTION	
		4	2016/07/26	ISSUE FOR CONSTRUCTION	
REV:		NO:	DATE:	ISSUED FOR:	REV: DATE:

DRAWN BY: DEB	DESIGNED BY: RYS
CHECKED BY: RYS 2016/07/26	APPROVED BY:
SCALE: 1:25 FULL SIZE ONLY	




**GO SHELTER DESIGNS**  
SHELTER TYPE 4 – SMALL BIKE SHELTERS  
PLANS AND DETAILS

CONTRACT NO: ROQ-2014- CON-061	DRAWING NO: S4.1	REV. 0.	SHEET
--------------------------------------	---------------------	------------	-------



METRIC

ALL DIMENSIONS SHOWN ARE IN METERS AND/OR MILLIMETERS UNLESS OTHERWISE NOTED

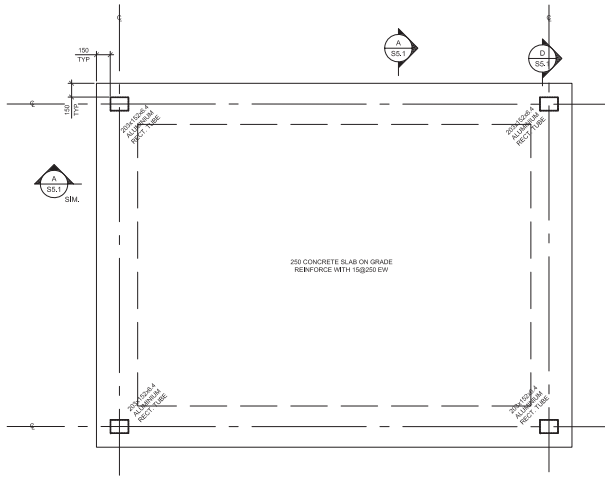


LARGE BIKE SHELTER FOUNDATION PLAN

- FOR THE STRUCTURAL GENERAL NOTES, REFER TO SPECIFICATION SECTION.
- GROUT BASE PLATES AND BEARING PLATES PRIOR TO PLACING LOADS ON STRUCTURE.
- REFER TO ARCHITECTURAL DRAWINGS FOR DIMENSIONS AND GRIDLINES.
- REFER TO ARCH DWSGS FOR SLOPE.

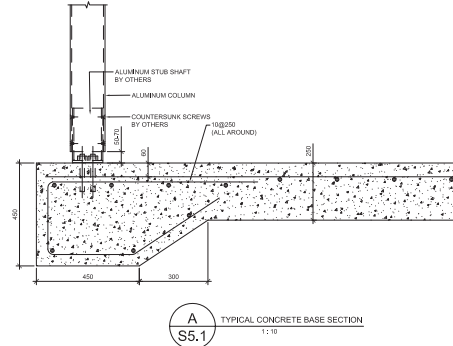




TYPICAL BASE PLATE CONNECTION DETAIL FOR 203x152 RECT. TUBE

SCALE: 1:10

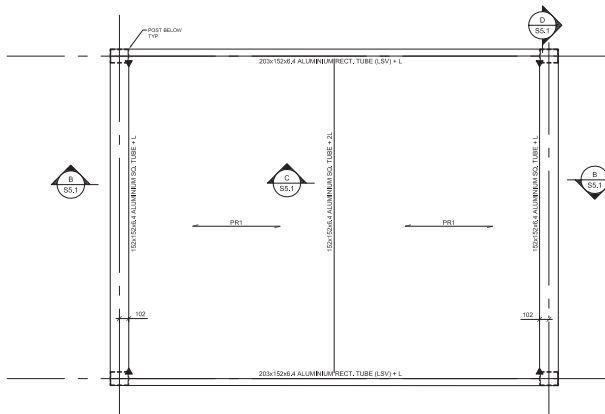

LARGE BIKE SHELTER ROOF FRAMING PLAN

- FOR THE STRUCTURAL GENERAL NOTES, REFER TO SPECIFICATION SECTION.
- FOR ROOF DATUM ELEVATION AND DIMENSIONS REFER TO ARCHITECTURAL DRAWINGS.
- UNLESS NOTED OTHERWISE ON PLAN, DESIGN LOADS ARE: LIVE LOAD (SNOOW) = 2.4 kN/m<sup>2</sup> MINIMUM.
- "TYP" ON PLAN DENOTES 76 DEEP x 5.5" Z" ALUMINUM PURLINS @ 610 ON CENTER SECURED WITH SELF DRILLING TEK SCREWS 4 x 1.419".
- ▶ MOMENT CONNECTIONS (W/BRAC, MESS/AN, CRIB/TIONS).
- DESIGN THE COLUMN TO BEAM CONNECTION FOR A MINIMUM COMBINED FORCES OF H<sub>MAX</sub>, M<sub>MIN</sub>, M<sub>MAX</sub>, M<sub>MIN</sub>, M<sub>MAX</sub>, M<sub>MIN</sub>.
- THERE SHALL BE NO WELDED CONNECTION UNLESS ALLOWED AND CONFIRMED WITH THE STRUCTURAL CONSULTANT.

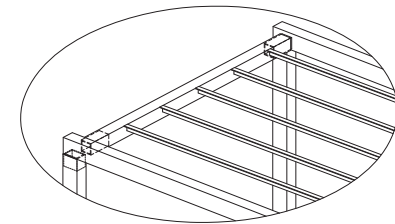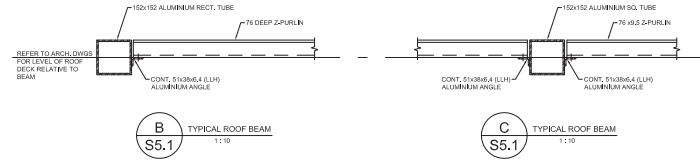

NOTE: THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON METROLINX GO TRAVEL DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SITE SPECIFIC CONDITIONS AND INTERDISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS.

METROLINX PROJECT NO. XXXXXX

REFERENCE DRAWINGS

NO.	DATE	ISSUED FOR	REV.	DATE

ISSUE

NO.	DATE	ISSUED FOR
1	2016/07/26	ISSUE FOR PERMIT
2	2016/07/26	ISSUE FOR PERMIT
3	2016/07/26	ISSUE FOR PERMIT
4	2016/07/26	ISSUE FOR PERMIT

REVISIONS

NO.	DATE	REVISION

DRAWN BY: DEB

DESIGNED BY: RYS

CHECKED BY: RYS

APPROVED BY: RYS

SCALE: 1:25

FULL SIZE ONLY



GO SHELTER DESIGNS  
SHELTER TYPE 5 - LARGE BIKE SHELTERS  
PLANS AND DETAILS

CONTRACT NO: R00-2014-CON-06.1

DRAWING NO: S5.1

REV. SHEET 0. 1