



SHELTER TYPE 1 - RAIL LINE STATION PASSENGER SHELTER




SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER



SHELTER TYPE 3 - ON-STREET BUS PASSENGER SHELTER



SHELTER TYPE 4 - SMALL BIKE SHELTER

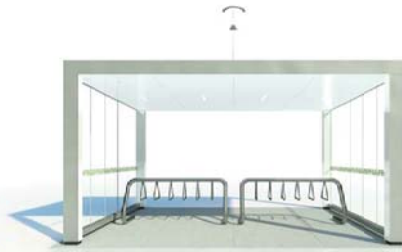

SHELTER TYPE 5 - LARGE BIKE SHELTER



SHELTER TYPE 6 - AMENITIES SHELTER



ARCHITECTURAL SHEET LIST		
SHEET NUMBER	SHELTER TYPE	SHEET NAME
A1.0	SHELTER TYPE 1 - RAIL LINE STATIONS PASSENGER SHELTER	3D ISOMETRIC VIEWS
A1.1	SHELTER TYPE 1 - RAIL LINE STATIONS PASSENGER SHELTER	PLANS
A1.2	SHELTER TYPE 1 - RAIL LINE STATIONS PASSENGER SHELTER	ELEVATIONS
A1.3	SHELTER TYPE 1 - RAIL LINE STATIONS PASSENGER SHELTER	SECTIONS
A2.0a	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	3D ISOMETRIC VIEWS
A2.0b	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	3D STRUCTURAL ISOMETRIC VIEWS
A2.1	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	PLANS
A2.2	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	REFLECTED CEILING PLAN
A2.3	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	ELEVATIONS
A2.4	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	SECTIONS
A2.5	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	SECTIONS
A3.0	SHELTER TYPE 3 - ON-STREET BUS PASSENGER SHELTER	3D ISOMETRIC VIEWS
A3.1	SHELTER TYPE 3 - ON-STREET BUS PASSENGER SHELTER	PLANS AND SECTIONS
A3.2	SHELTER TYPE 3 - ON-STREET BUS PASSENGER SHELTER	ELEVATIONS
A4.0	SHELTER TYPE 4 - SMALL BIKE SHELTER	3D ISOMETRIC VIEWS
A4.1	SHELTER TYPE 4 - SMALL BIKE SHELTER	PLANS
A4.2	SHELTER TYPE 4 - SMALL BIKE SHELTER	ELEVATIONS AND SECTIONS
A5.0	SHELTER TYPE 5 - LARGE BIKE SHELTER	3D ISOMETRIC VIEWS
A5.1	SHELTER TYPE 5 - LARGE BIKE SHELTER	PLANS
A5.2	SHELTER TYPE 5 - LARGE BIKE SHELTER	ELEVATIONS AND SECTIONS
A6.0	SHELTER TYPE 6 - AMENITIES SHELTER	3D ISOMETRIC VIEWS
A6.1	SHELTER TYPE 6 - AMENITIES SHELTER	PLANS, ELEVATIONS, AND SECTIONS
A8.1	GENERAL	ROOF AND GLAZING DETAILS
A8.2	GENERAL	INFO / SERVICE WALL A DETAILS
A8.3	GENERAL	INFO / SERVICE WALL B DETAILS
A8.4	GENERAL	ADDITIONAL INFO / SERVICE WALL DETAILS
A8.5	GENERAL	DOOR FRAME DETAILS
A8.6	GENERAL	SWING GUARD AND OPEN FRAME DETAILS
A8.7	GENERAL	FURNISHINGS DETAILS

ELECTRICAL SHEET LIST		
SHEET NUMBER	SHELTER TYPE	SHEET NAME
ED.1	GENERAL	ELECTRICAL SYMBOLS LEGEND
ED.2	GENERAL	ELECTRICAL INTERCONNECTION DIAGRAM
E1.1	SHELTER TYPE 1 - RAIL LINE STATIONS PASSENGER SHELTER	POWER AND LIGHTING PLANS
E2.1	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	POWER AND LIGHTING PLANS
E2.2	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	HEAT TRACE PLAN
E3.1	SHELTER TYPE 3 - ON-STREET BUS PASSENGER SHELTER	POWER AND LIGHTING PLANS
E4.1	SHELTER TYPE 4 - SMALL BIKE SHELTER	POWER AND LIGHTING PLANS
E5.1	SHELTER TYPE 5 - LARGE BIKE SHELTER	POWER AND LIGHTING PLANS
E6.1	SHELTER TYPE 6 - AMENITIES SHELTER	POWER AND LIGHTING PLANS

STRUCTURAL SHEET LIST		
SHEET NUMBER	SHELTER TYPE	SHEET NAME
S0.1	GENERAL	GENERAL NOTES AND DRAWING LIST
S1.1	SHELTER TYPE 1 - RAIL LINE STATIONS PASSENGER SHELTER	PLANS AND DETAILS
S2.1	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	PLANS
S2.2	SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER	DETAILS
S3.1	SHELTER TYPE 3 - ON-STREET BUS PASSENGER SHELTER	PLANS AND DETAILS
S4.1	SHELTER TYPE 4 - SMALL BIKE SHELTER	PLANS AND DETAILS
S5.1	SHELTER TYPE 5 - LARGE BIKE SHELTER	PLANS AND DETAILS
S6.1	SHELTER TYPE 6 - AMENITIES SHELTER	PLANS AND DETAILS

MASTER KEYNOTE LIST	
KEY VALUE	DESCRIPTION
03 30 00	CAST-IN-PLACE CONCRETE
03 30 20	SANDED STRIKE CONCRETE FINISHING
05 14 00	STRUCTURAL ALUMINUM FRAMING
05 14 13	ARCHITECTURALLY-EXPOSED STRUCTURAL ALUMINUM FRAMING
05 10 00.01	STEEL ROOF SCORING
05 50 00.00	ALUMINUM SHEET
05 50 00.01	3mm ALUMINUM PLATE
05 50 00.02	5mm ALUMINUM PLATE
05 50 00.03	6.4mm ALUMINUM PLATE
05 50 00.04	ALUMINUM EXTRUSION
05 50 00.05	ALUMINUM FINISHING
05 50 00.07	3mm PERFORATED ALUMINUM PLATE
05 50 00.08	BENCH SEATS
05 50 00.01	PVC DOWNWATER LEADER
05 50 00.02	PVC DOWNWATER LEADER CLEANOUT
05 50 00.03	13mm WHITE CORIAN
05 50 00.04	ALUMINUM WIRE SYMBOL
05 50 00.05	ALUMINUM GUTTER
05 50 00.01	ALUMINUM STUB SHAFT CONNECTION
07 42 41.01	ALUMINUM CEILING PANELS
07 54 20.01	PVC MEMBRANE ROOF OR 20mm PLYWOOD DECK
07 54 20.02	PVC MEMBRANE ROOF OR 13mm SHEATHING BOARD
08 56 88.01	CUSTOM ALUMINUM GLAZING SINE
08 56 88.02	RECESSED GLAZING HEAD CHANNEL
08 56 88.03	GLAZING SUPPORT AND LEVELLING BOLTS
08 71 13.01	AUTOMATIC DOOR OPERATOR
08 71 13.02	AUTOMATIC DOOR OPERATOR BUTTON
08 80 00.01	RETRACTION DECAL
08 80 00.02	AUTOMATIC DOOR SEN
08 80 00.03	PUSH-PULL LEGAL (DOOR)
08 80 00.01	10MM CLEAR TEMPERED GLASS WITH PYROLYTIC LOW-E COATING
08 80 00.02	10MM CLEAR TEMPERED GLASS
08 80 00.03	6MM CLEAR LOW-IRON TEMPERED GLASS
08 80 00.04	6MM LOW-IRON TEMPERED GLASS WITH WHITE CERAMIC ON BACK
23 10 00.01	RADIANT HEATED FLOORS - ELECTRIC
23 10 00.02	HEATER CONTROL BUTTON
26 05 31.01	JUNCTION BOX
26 09 24.01	PHOTOCELL DAYLIGHTING SENSOR
26 27 26.01	LED SCREEN
26 27 26.02	LED LIGHT PANEL
26 27 26.03	OFFER RECEPTACLE
26 27 26.04	USB CHARGING RECEPTACLE
26 50 00.01	RECESSED LED LINEAR LIGHT FIXTURE
27 51 16.01	PUBLIC ADDRESS SPEAKER
27 53 25.01	TRIMMABLE COMMUNICATIONS DEVICE
28 20 00.01	OUTDOOR CCTV CAMERA

DOORS SCHEDULE								
DOOR NO.	Type	Location	DOOR			Door Material	Door Finish	Comments
			Width	Height	Thickness			
D1	Shelter Door - Glass	Shelter Type 1	1975	2300	47.6	Aluminum	Coating, as per drawings	
D2	Shelter Door - Glass	Shelter Type 1	1975	2300	47.6	Aluminum	Coating, as per drawings	
D3	Shelter Door - Glass	Shelter Type 2	1975	2300	47.6	Aluminum	Coating, as per drawings	
D4	Shelter Door - Glass	Shelter Type 2	1975	2300	47.6	Aluminum	Coating, as per drawings	
D001	Interior B Entry Access Door	Shelter Type 1	1335.6	1943	85.2	Aluminum	As per drawings	
D002	Interior B Entry Access Door	Shelter Type 2	1335.6	1943	85.2	Aluminum	As per drawings	
D003	Interior B Entry Access Door	Shelter Type 3	1335.6	1943	85.2	Aluminum	As per drawings	
D004	Interior B Entry Access Door	Shelter Type 4	1335.6	1943	85.2	Aluminum	As per drawings	
D005	Interior B Entry Access Door	Shelter Type 5	1335.6	1943	85.2	Aluminum	As per drawings	
D006	Interior B Entry Access Door	Shelter Type 6	1335.6	1943	85.2	Aluminum	As per drawings	
D007	Interior B Entry Access Door	Shelter Type 1	1335.6	1943	85.2	Aluminum	As per drawings	Optional
D008	Interior B Entry Access Door	Shelter Type 2	1335.6	1943	85.2	Aluminum	As per drawings	Optional
D009	Interior B Entry Access Door	Shelter Type 3	1335.6	1943	85.2	Aluminum	As per drawings	Optional
D010	Interior B Entry Access Door	Shelter Type 4	1335.6	1943	85.2	Aluminum	As per drawings	Optional
D011	Interior B Entry Access Door	Shelter Type 5	1335.6	1943	85.2	Aluminum	As per drawings	Optional
D012	Interior B Entry Access Door	Shelter Type 6	1335.6	1943	85.2	Aluminum	As per drawings	Optional
D013	Interior B Entry Access Door	Shelter Type 1	1335.6	1943	85.2	Aluminum	As per drawings	Optional
D014	Interior B Entry Access Door	Shelter Type 2	1335.6	1943	85.2	Aluminum	As per drawings	Optional
D015	Interior B Entry Access Door	Shelter Type 3	1335.6	1943	85.2	Aluminum	As per drawings	Optional
D016	Interior B Entry Access Door	Shelter Type 4	1335.6	1943	85.2	Aluminum	As per drawings	Optional
D017	Interior B Entry Access Door	Shelter Type 5	1335.6	1943	85.2	Aluminum	As per drawings	Optional
D018	Interior B Entry Access Door	Shelter Type 6	1335.6	1943	85.2	Aluminum	As per drawings	Optional

LIGHTING FIXTURES LEGEND				
Value	Type - Length	Comments	Count / Keynote	
L1	RECESSED LINEAR LED - 640 mm	Shelter Type 1	1	05 50 00.01
L2	RECESSED LINEAR LED - 965.5 mm	Shelter Type 2	10	26 50 00.01
L3	RECESSED LINEAR LED - 458.5 mm	Shelter Type 4	4	26 50 00.01
L4	RECESSED LINEAR LED - 583.5 mm	Shelter Type 5	4	26 50 00.01
L5	RECESSED LINEAR LED - 583.5 mm	Shelter Type 6	6	26 50 00.01


GLAZING LEGEND	
Tag	Description
G1	10mm Clear Glass with Low-E Coating
G2	10mm Clear Glass
G3	6mm Low-iron Glass
G4	10mm Clear Glass with Low-E Coating

COATINGS LEGEND	
Tag	Description
P1	Paint: Silver Gray, Matte
P2	Paint: White, Glossy
P3	Paint: Dark Gray, Matte

METRIC
ALL DIMENSIONS SHOWN
ARE IN METERS AND/OR
MILLIMETERS UNLESS
OTHERWISE NOTED

REFERENCE DRAWINGS		ISSUE		REVISIONS			
		1	2016/08/12	50% DETAILED DESIGN	1	2016/02/01	100% DETAILED DESIGN (DRAFT) - REVISED
		2	2016/10/07	75% DETAILED DESIGN			
		3	2016/10/27	100% DETAILED DESIGN (DRAFT)			
		4	2016/08/02	100% DETAILED DESIGN			

DRAWN BY: JDG	DESIGNED BY: gh3
CHECKED BY: PH 2016/07/26	APPROVED BY: PH 2016/07/26
SCALE: 1 : 5	FULL SIZE ONLY




GO SHELTER DESIGNS			
DRAWINGS LIST, SCHEDULES, AND GENERAL NOTES			
CONTRACT NO: R00-2014-	DRAWING NO: 0.1	REV: 0.	SHEET 0.
CON-06.1			


GENERAL NOTES:
1. Drawings are not to be specific Contractor. It is the responsibility of the Contractor to verify all dimensions and conditions and dimensions required to perform the Work and all work is to be done in accordance with the Contract Documents and the applicable governing laws.
2. The Contractor shall be responsible for obtaining all other Contract Documents including the Project Manuals and the Technical and General Drawings. In case of a discrepancy between the Contract Documents with respect to the quantity, dates or scope of work, the greater shall prevail.
3. The Contractor shall be responsible for obtaining all other Contract Documents including the Project Manuals and the Technical and General Drawings. In case of a discrepancy between the Contract Documents with respect to the quantity, dates or scope of work, the greater shall prevail.
4. The Contractor shall be responsible for obtaining all other Contract Documents including the Project Manuals and the Technical and General Drawings. In case of a discrepancy between the Contract Documents with respect to the quantity, dates or scope of work, the greater shall prevail.
5. The Contractor shall be responsible for obtaining all other Contract Documents including the Project Manuals and the Technical and General Drawings. In case of a discrepancy between the Contract Documents with respect to the quantity, dates or scope of work, the greater shall prevail.
6. These documents are not to be used for construction unless specifically noted for such purpose.

METROLINX PROJECT NO. XXXXXX

KEYNOTE LEGEND	
NO.	DESCRIPTION
03.30.00	CAST-IN-PLACE CONCRETE
03.35.23	SMOKE-ASTER CONCRETE FINISHING
05.14.13	ARCHITECTURAL WALL-CORROSED STRUCTURAL ALUMINUM FRAMING
05.50.00.A1	2MM ALUMINUM PLATE
05.50.00.B1	BENCH SEATS
05.50.00.C1	PVC RAINWATER LEADER
05.50.00.D1	ALUMINUM GUTTER
07.54.50.A2	PVC MEMBRANE ROOF ON 13mm SHEATHING BOARD
08.00.00.GL.1	10MM CLEAR TEMPERED GLASS WITH PYROLYTIC-LOW-E COATING
08.05.31.A1	JUNCTION BOX

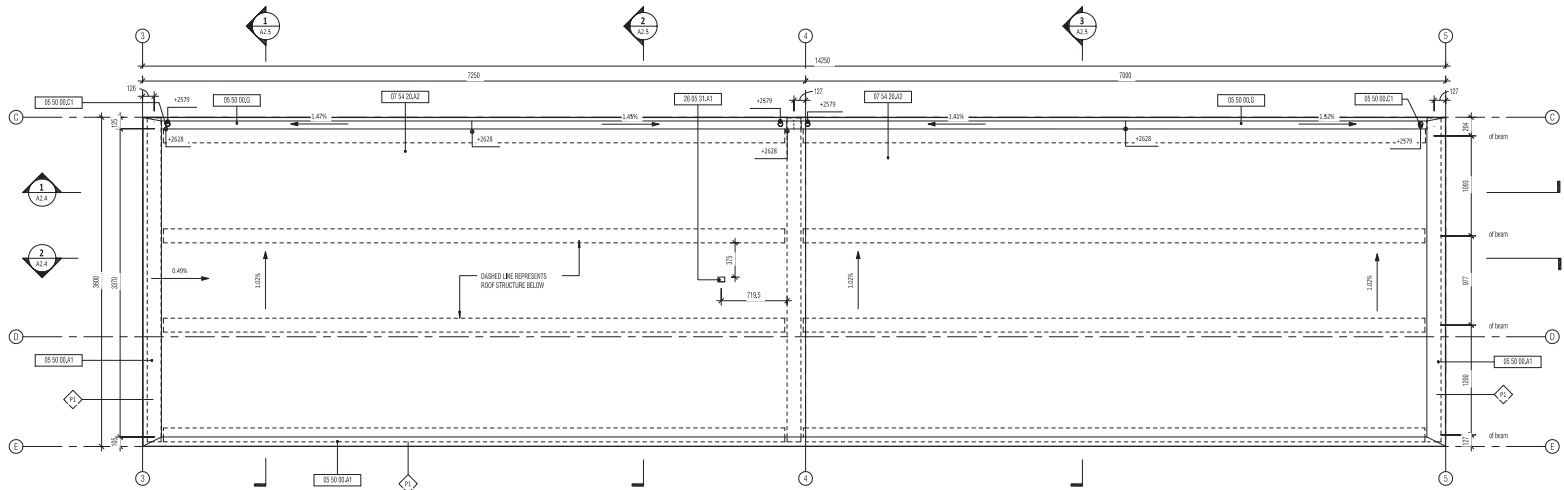

2 TYPE 2 ROOF PLAN
A2.1 1:25

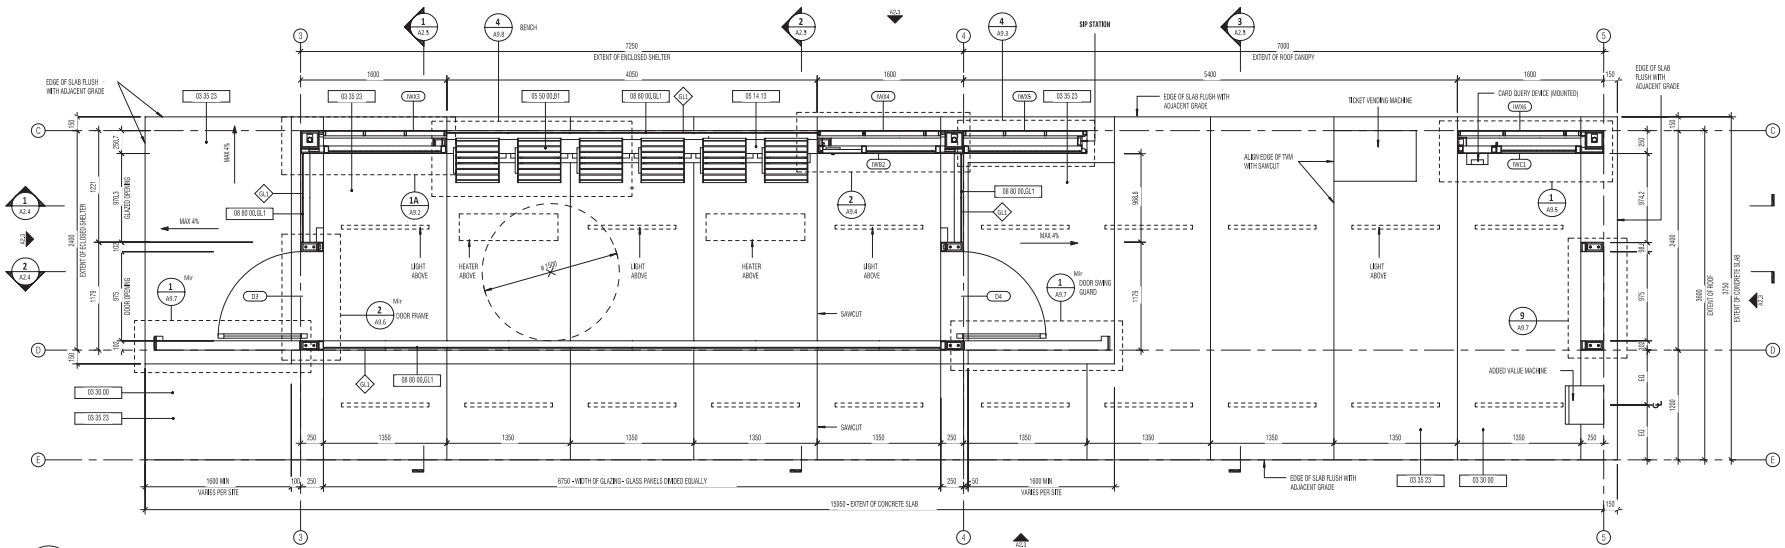

1 TYPE 2 PLAN
A2.1 1:25

METRIC
ALL DIMENSIONS SHOWN
ARE IN METERS (M) AND/OR
MILLIMETERS (MM) UNLESS
OTHERWISE NOTED

NOTE:
THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON
METHODS OF TRAFFIC DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT
SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SITE SPECIFIC CONDITIONS AND INTER-
DISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS
SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL
CONSTRUCTION BEGINS.

METROLINX PROJECT NO. XXXXXX

REFERENCE DRAWINGS		ISSUE		REVISIONS			
		1	2015/08/12	50% DETAILED DESIGN	1	2016/02/01	100% DETAILED DESIGN (DRAFT)-REVISED
		2	2015/10/07	75% DETAILED DESIGN			
		3	2016/01/27	100% DETAILED DESIGN (DRAFT)			
		4	2016/06/02	100% DETAILED DESIGN			


DRAWN BY: JDG	DESIGNED BY: gh3
CHECKED BY: PH 2016/07/26	APPROVED BY: PH 2016/07/26
SCALE: 1 : 25	FULL SIZE ONLY



GO SHELTER DESIGNS
SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER
PLANS

CONTRACT NO: R00-2014- CON-06.1	DRAWING NO: A2.1	REV. SHEET 0.
---------------------------------------	---------------------	------------------

KEYNOTE LEGEND	
NO.	DESCRIPTION
05 50 00.01	3mm ALUMINIUM PLATE
05 50 00.02	PVC RAINWATER LEADER
07 42 41.01	ALUMINIUM CEILING PANELS
08 11 13.01	AUTOMATIC DOOR OPERATOR
23 85 00.01	RADIANT INFRARED HEATERS - ELECTRIC
26 09 20.01	PHOTOCELL DAYLIGHTING SENSOR
28 50 00.01	RECESSED LED LINEAR LIGHT FIXTURE
27 51 10.01	PUBLIC ADDRESS SPEAKER
28 23 00.01	OUTDOOR CCTV CAMERA

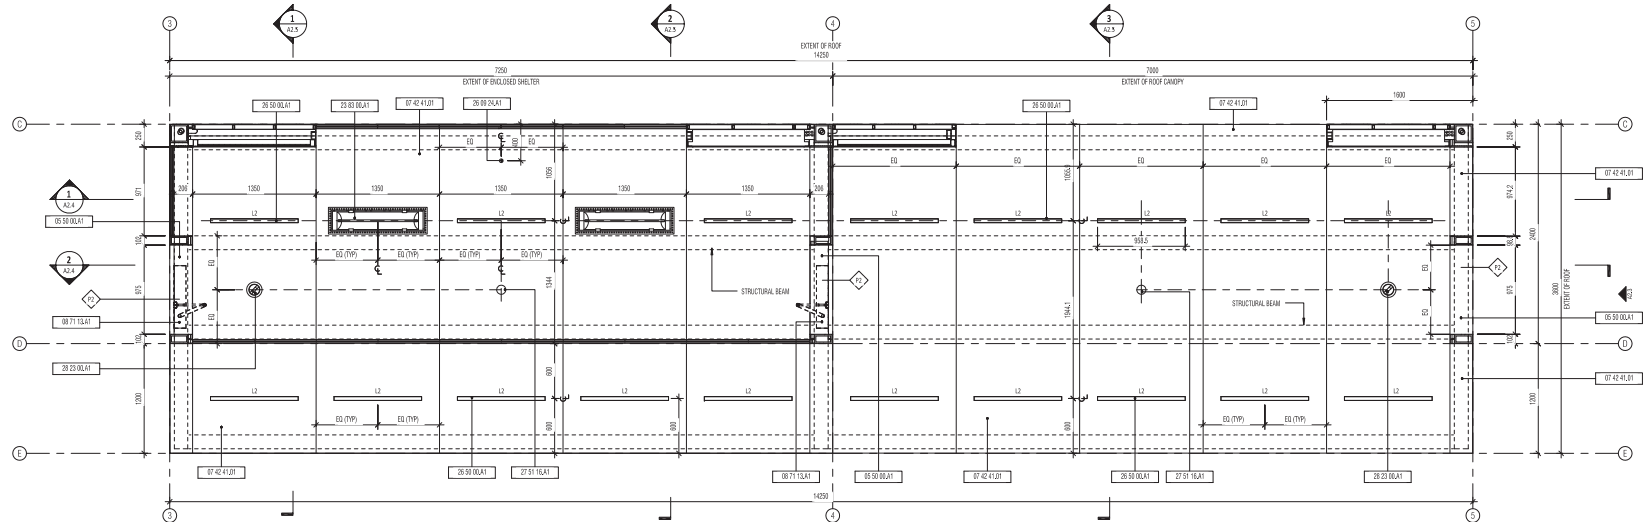


1 TYPE 2 REFLECTED CEILING PLAN
A2.2 1:25


NOTE:
THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON METROLINX GO TRAVEL DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SITE SPECIFIC CONDITIONS AND INTERDISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS.

METROLINX PROJECT NO. XXXXXX

METRIC
ALL DIMENSIONS SHOWN
ARE IN METERS AND/OR
MILLIMETERS UNLESS
OTHERWISE NOTED

REFERENCE DRAWINGS		ISSUE		REVISIONS		DRAWN BY:	DESIGNED BY:		GO SHELTER DESIGNS SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER REFLECTED CEILING PLAN		
		1	2016/08/12	50% DETAILED DESIGN	1	2016/02/01	100% DETAILED DESIGN (DRAFT) - REVISED			CONTRACT NO:	DRAWING NO:
		2	2016/10/07	75% DETAILED DESIGN						REQ-2014-	A2.2
		3	2016/10/27	100% DETAILED DESIGN (DRAFT)					CON-061		
		4	2016/08/02	100% DETAILED DESIGN						REV. SHEET	
										0.	
REV:	REV:	NO:	DATE:	ISSUED FOR:	REV:	DATE:					

CHECKED BY: PH 2016/07/26
APPROVED BY: PH 2016/07/26
SCALE: FULL SIZE ONLY
1 : 25

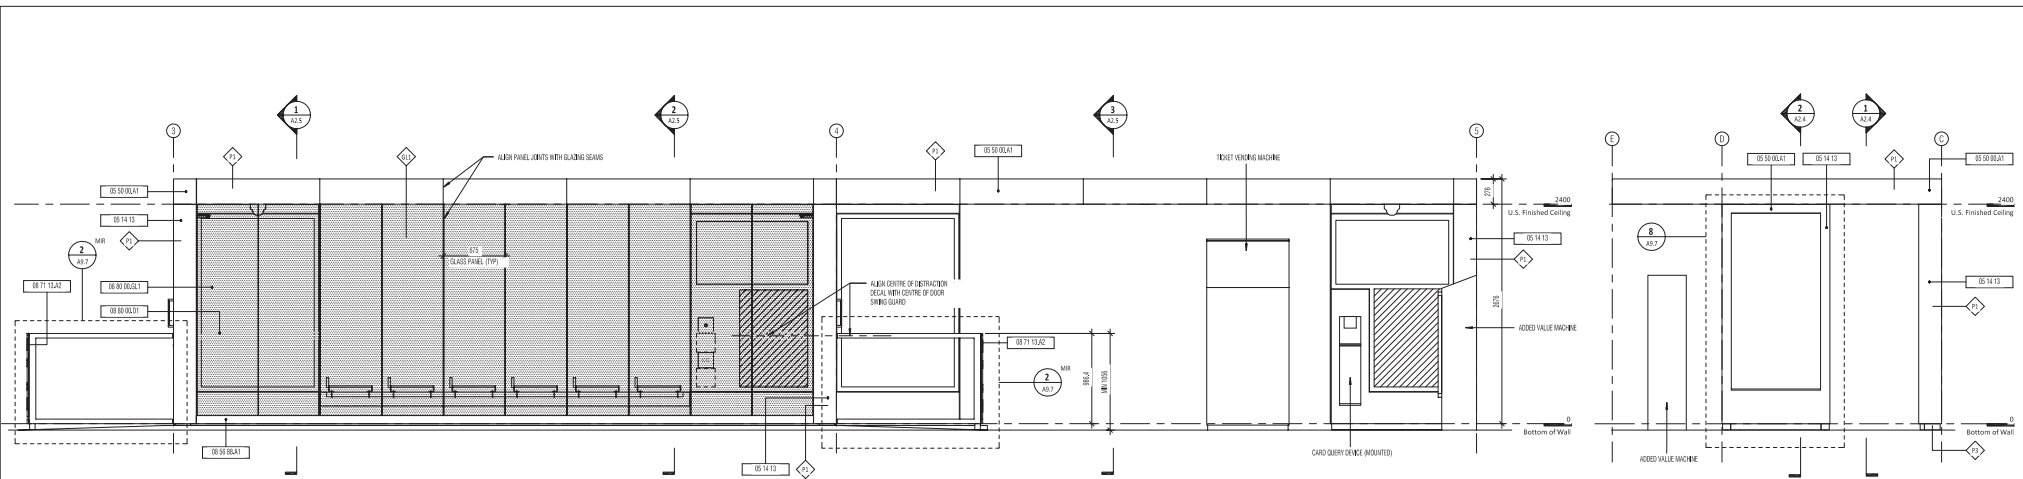


1 TYPE 2 ELEVATION - FRONT
A2.3 1:25

3 TYPE 2 ELEVATION - RIGHT
A2.3 1:25

KEYNOTE LEGEND	
NO.	DESCRIPTION
05 14 13	ARCHITECTURAL EXPOSED STRUCTURAL ALUMINUM FRAMING
05 50 00A1	3mm ALUMINUM PLATE
05 58 88A1	CUSTOM ALUMINUM GLAZING SHOE

KEYNOTE LEGEND	
NO.	DESCRIPTION
05 71 13A2	AUTOMATIC DOOR OPERATOR BUTTON
05 80 00D1	OBSTRUCTION DECAL
05 80 00GL1	10MM CLEAR TEMPERED GLASS WITH PYROLYTIC LOW-E COATING

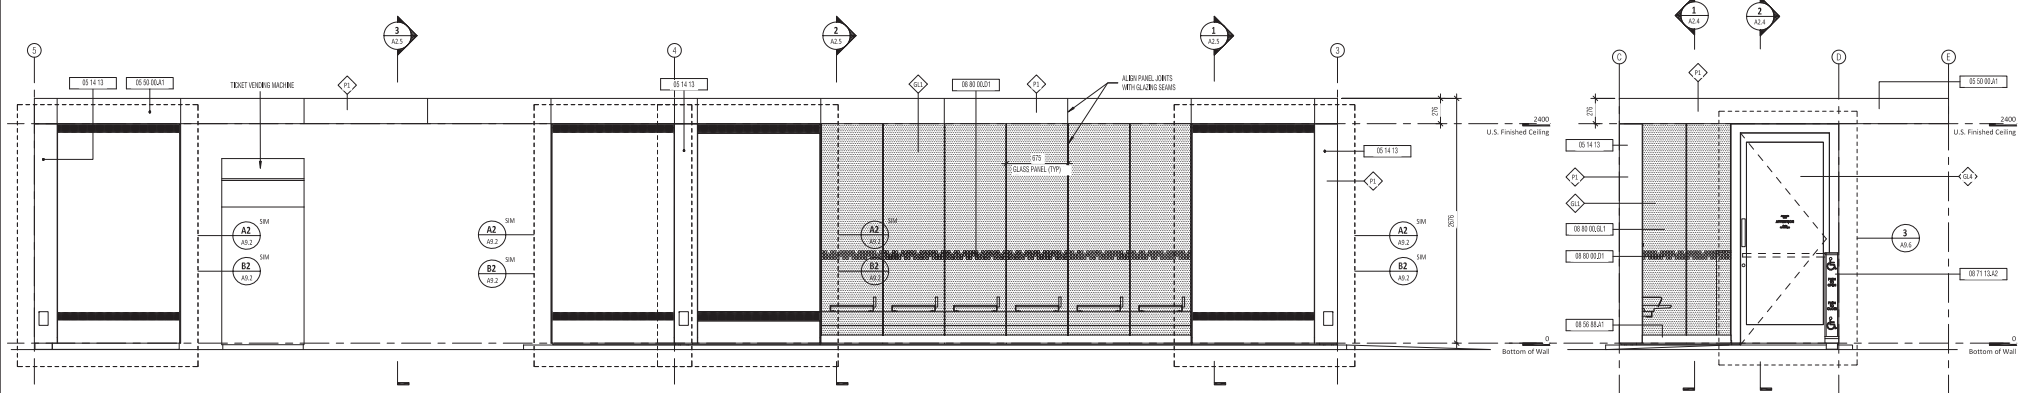

2 TYPE 2 ELEVATION - BACK
A2.3 1:25

4 TYPE 2 ELEVATION - LEFT
A2.3 1:25

METRIC
ALL DIMENSIONS SHOWN
ARE IN METERS AND/OR
MILLIMETERS UNLESS
OTHERWISE NOTED

NOTE:
THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON
METROLINX GO TRANSIT DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT
SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SPECIFIC SITE CONDITIONS AND INTER-
DISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS
SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL
CONSTRUCTION BEGINS.

METROLINX PROJECT NO. XXXXXX

REFERENCE DRAWINGS		ISSUE		REVISIONS			
		1	2015/08/12	50% DETAILED DESIGN	1	2016/02/01	100% DETAILED DESIGN (DRAFT) - REVISED
		2	2015/10/07	75% DETAILED DESIGN			
		3	2016/03/27	100% DETAILED DESIGN (DRAFT)			
		4	2016/08/02	100% DETAILED DESIGN			
REV:		NO:	DATE:	ISSUED FOR:	REV:	DATE:	


DRAWN BY: JDG
DESIGNED BY: gh3
CHECKED BY: PH
2016/07/26
APPROVED BY: PH
2016/07/26
SCALE: 1 : 25
FULL SIZE ONLY




GO SHELTER DESIGNS
SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER
ELEVATIONS

CONTRACT NO: R00-2014-CON-061
DRAWING NO: A2.3
REV: 0
SHEET

KEYNOTE LEGEND	
NO.	DESCRIPTION
05 10 00	CAST-IN-PLACE CONCRETE
05 14 00	STRUCTURAL ALUMINUM FRAMING
05 14 13	ARCHITECTURALLY-EXPOSED STRUCTURAL ALUMINUM FRAMING
05 31 00.01	STEEL ROOF DECKING
05 50 00.00	ALUMINUM SHEET
05 50 00.01	3mm ALUMINUM PLATE
05 50 00.05	ALUMINUM EXTRUSION
05 50 00.06	ALUMINUM FRAMING
05 50 00.09	ALUMINUM STUD SHIRT CONNECTION
07 42 41.01	ALUMINUM GELING PANELS
07 54 20.02	PVC MEMBRANE ROOF ON 15mm SHEATHING BOARD
08 56 00.01	CUSTOM ALUMINUM GLAZING SPINE
08 71 13.A1	AUTOMATIC DOOR OPERATOR
08 71 13.A2	AUTOMATIC DOOR OPERATOR BUTTON
08 80 00.01	RESTRICTION SIGN
08 80 00.01.1	10MM CLEAR TEMPERED GLASS WITH PYROLYTIC LONIC COATING
08 80 00.01.3	10MM CLEAR LOW-IRON TEMPERED GLASS
08 80 00.01.3.2	8MM LOW-IRON TEMPERED GLASS WITH WHITE COATING ON BACK
23 83 00.A1	RADIANT INFRARED HEATERS - ELECTRIC
26 27 28.A1	LED SCREEN
27 51 16.A1	PUBLIC ADDRESS SPEAKER
32 23 00.A1	OUTDOOR CIVIL CAMERA

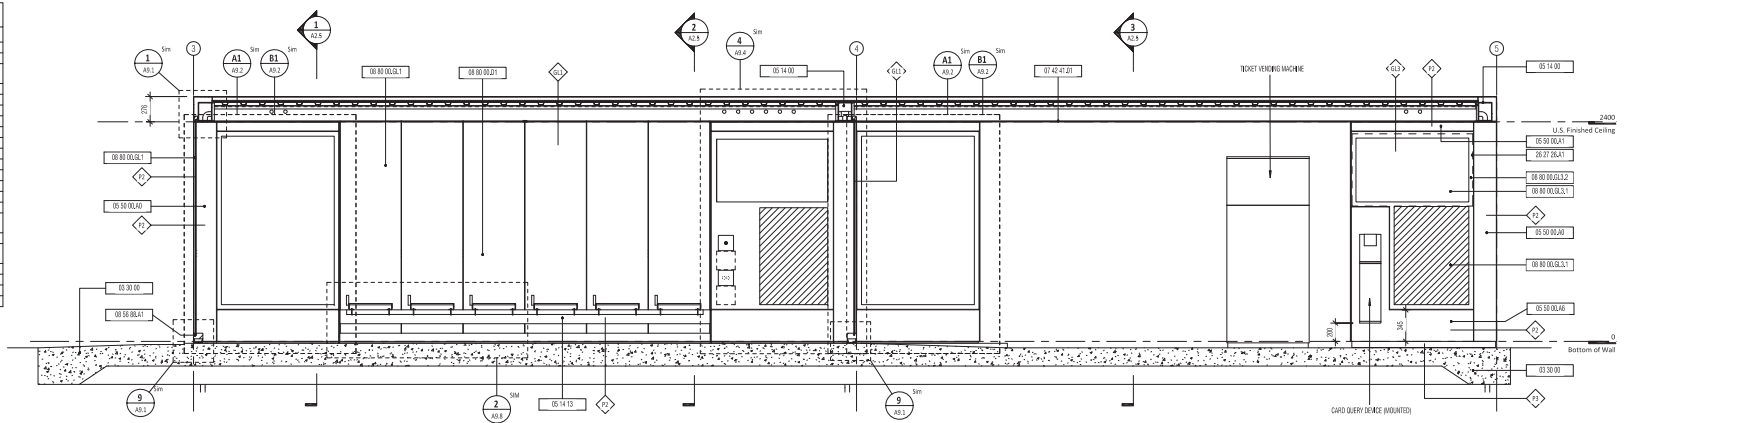

1 TYPE 2 SECTION 1
A2.4 1:25

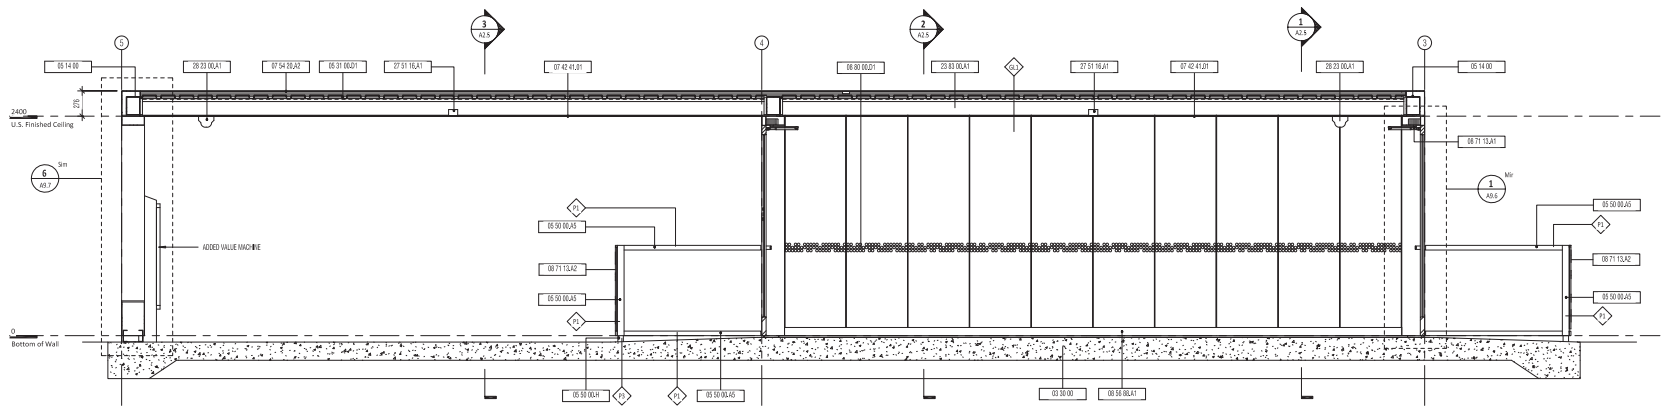

2 TYPE 2 SECTION 2
A2.4 1:25

METRIC
ALL DIMENSIONS SHOWN
ARE IN METERS (M) AND/OR
MILLIMETERS (MM) UNLESS
OTHERWISE NOTED

NOTE:
THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON
METROLINX GO TRANSIT DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT
SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SPECIFIC SITE CONDITIONS AND INTER-
DISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS
SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL
CONSTRUCTION BEGINS.

METROLINX PROJECT NO. XXXXXX

REFERENCE DRAWINGS		ISSUE		REVISIONS			
		1	2015/08/12	50% DETAILED DESIGN	1	2016/02/01	100% DETAILED DESIGN (DRAFT) - REVISED
		2	2016/06/07	75% DETAILED DESIGN			
		3	2016/07/27	100% DETAILED DESIGN (DRAFT)			
		4	2016/08/02	100% DETAILED DESIGN			
REV:		NO:	DATE:	ISSUED FOR:	REV:	DATE:	


DRAWN BY: JDG
DESIGNED BY: gh3
CHECKED BY: PH
2016/07/26
APPROVED BY: PH
2016/07/26
SCALE: FULL SIZE ONLY
1:25




GO SHELTER DESIGNS
SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER
SECTIONS

CONTRACT NO: R00-2014- CON-061	DRAWING NO: A2.4	REV: 0	SHEET
--------------------------------------	---------------------	--------	-------


KEYNOTE LEGEND	
NO.	DESCRIPTION
05 30 00	CAST-IN-PLACE CONCRETE
05 14 00	STRUCTURAL ALUMINUM FRAMING
05 14 13	ARCHITECTURALLY-EXPOSED STRUCTURAL ALUMINUM FRAMING
05 50 00.03	6mm ALUMINUM PLATE
05 71 15.01	AUTOMATIC DOOR OPERATOR
05 71 15.02	AUTOMATIC DOOR OPERATOR BUTTON
05 80 00.01	INTACTIVE TOUCHSCREEN
05 80 00.01.1	TOWN CLEAR TEMPERED GLASS WITH PYROCLIC LOW-E COATING
05 80 00.01	RECESSED LED LINEAR LIGHT FIXTURE
07 51 25.01	TWO-WAY COMMUNICATION DEVICE
07 51 25.01	OUTDOOR CCTV CAMERA

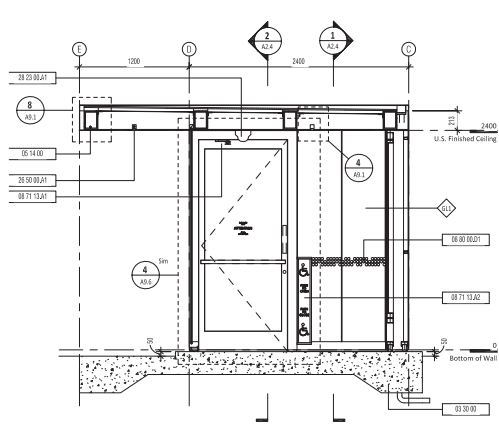

1 TYPE 2 SECTION 4
A2.5 1:25

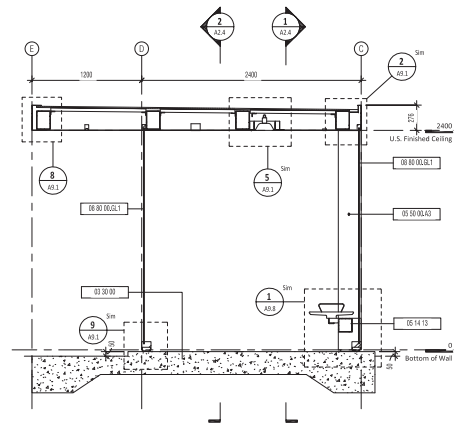

2 TYPE 2 SECTION 3
A2.5 1:25

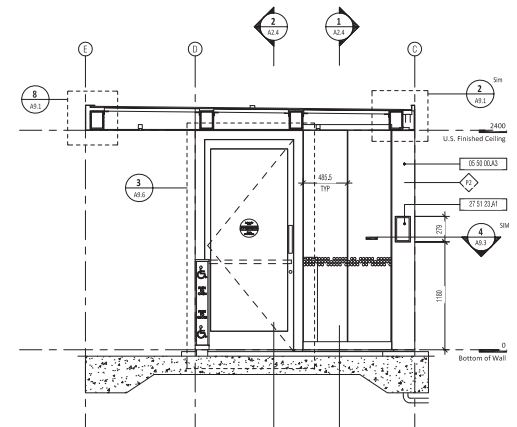

3 TYPE 2 SECTION 5
A2.5 1:25

METRIC
ALL DIMENSIONS SHOWN
ARE IN METERS AND/OR
MILLIMETERS UNLESS
OTHERWISE NOTED

NOTE:
THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON
METROLINX GO TRANSIT DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT
SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SITE SPECIFIC CONDITIONS AND INTER-
DISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS
SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL
CONSTRUCTION BEGINS.

METROLINX PROJECT NO. XXXXXX

REFERENCE DRAWINGS		ISSUE		REVISIONS	
		1	20150812 50% DETAILED DESIGN	1	20160201 100% DETAILED DESIGN (DRAFT)-REVISED
		2	20151007 75% DETAILED DESIGN		
		3	20160127 100% DETAILED DESIGN (DRAFT)		
		4	20160802 100% DETAILED DESIGN		
REV:		NO:	DATE:	ISSUED FOR:	REV: DATE:


DRAWN BY: JDG
DESIGNED BY: gh3
CHECKED BY: PH
2016/07/26
APPROVED BY: PH
2016/07/26
SCALE: FULL SIZE ONLY
1 : 25




GO SHELTER DESIGNS
SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER
SECTIONS

CONTRACT NO: R00-2014- CON-061	DRAWING NO: A2.5	REV: 0.	SHEET
--------------------------------------	---------------------	------------	-------


ROOF

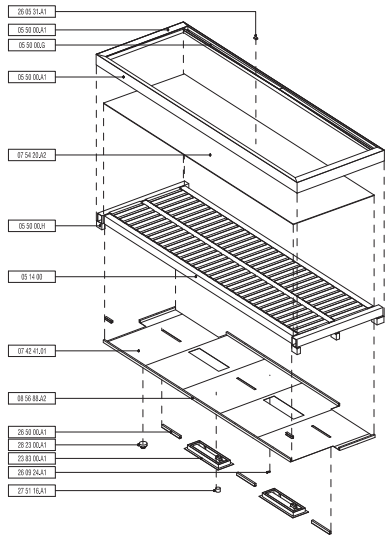


ROOF EXPLODED ISOMETRIC VIEW

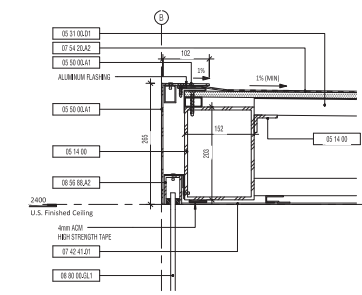


1 FRONT ROOF FASCIA - SECTION DETAIL




2 BACK ROOF FASCIA - SECTION DETAIL

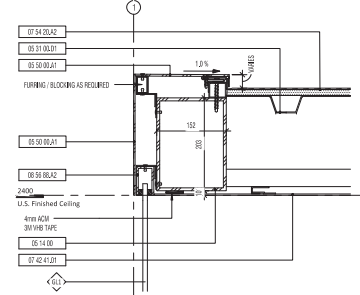


3 SIDE ROOF FASCIA - SECTION DETAIL




4 LIGHT DETAIL

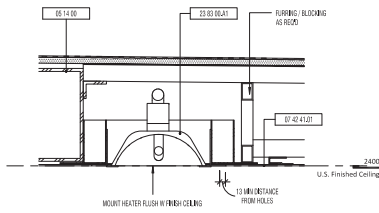


5 HEATER - SECTION DETAIL

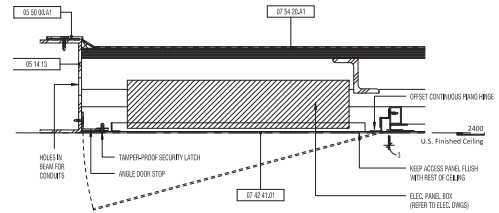

6 CEILING ACCESS PANEL SECTION DETAIL




7 TYPE 5 OPEN FASCIA - SECTION DETAIL




8 UNENCLOSED FRONT ROOF FASCIA - SECTION DETAIL


GLAZING




GLASS SCREEN - EXPLODED ISOMETRIC



9 GLAZING BASE AT GRADE - SECTION DETAIL A



10 RAKED GLAZING BASE - SECTION DETAIL

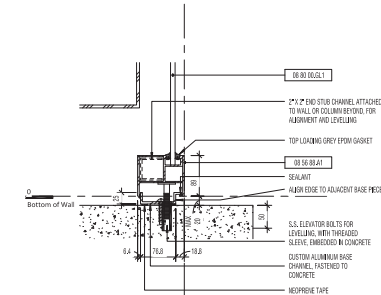

11 GLAZING BASE AT GRADE - SECTION DETAIL B

KEYNOTE LEGEND	
NO.	DESCRIPTION
05 14 00	STRUCTURAL ALUMINUM FRAMING
05 14 13	ARCHITECTURALLY EXPOSED STRUCTURAL ALUMINUM FRAMING
05 31 00.01	STEEL ROOF DECKING
05 50 00.01	3mm ALUMINUM PLATE
05 50 00.04	ALUMINUM GUTTER
05 50 00.07	ALUMINUM STUD SHIRT CONNECTION
07 42 41.01	ALUMINUM CEILING PANELS
07 54 20.01	PVC MEMBRANE ROOF ON 20mm SLYWOOD DECK
07 54 20.02	PVC MEMBRANE ROOF ON 10mm SHEATHING BOARD
08 56 00.01	CUSTOM ALUMINUM GLAZING SHOE
08 80 00.01	PRESESSLED GLAZING HEAD CHANNEL
08 80 00.02	STRUCTURAL ISOLATION
08 80 00.03	FOAM CLEAR TEMPERED GLASS WITH PROTECTIVE COATING
08 80 00.04	ADJUST EDGE TO ADJUST BASE PICES
08 80 00.05	STAIN CLEAR TEMPERED GLASS
23 03 00.01	RADIANT INFRARED HEATERS - ELECTRIC
23 03 31.01	FUNCTION BOX
26 02 24.01	PHOTOCELL DAYLIGHTING SENSOR
26 50 00.01	PRESESSLED LINEAR LIGHT FIXTURE
27 51 16.01	PUBLIC ADDRESS SPEAKER
28 20 00.01	OUTDOOR CCTV CAMERA

NOTE: THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON METROLINEX GO TRANSIT DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SPECIFIC SITE CONDITIONS AND INTERDISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS.

METROLINX PROJECT NO. XXXXXX

METRIC
ALL DIMENSIONS SHOWN ARE IN METERS UNLESS OTHERWISE NOTED

REFERENCE DRAWINGS		ISSUE		REVISIONS			
		1	2015/08/12	50% DETAILED DESIGN	1	2016/02/01	100% DETAILED DESIGN (DRAFT) - REVISED
		2	2015/10/07	75% DETAILED DESIGN			
		3	2016/01/27	100% DETAILED DESIGN (DRAFT)			
		4	2016/06/02	100% DETAILED DESIGN			
REV:	REV:	NO:	DATE:	ISSUED FOR:	REV:	DATE:	

DRAWN BY: JDG
DESIGNED BY: gh3
CHECKED BY: PH
2016/07/26
APPROVED BY: PH
2016/07/26
SCALE: 1 : 5
FULL SIZE ONLY



GO SHELTER DESIGNS
GENERAL
ROOF AND GLAZING DETAILS

CONTRACT NO: R00-2014-CON-06.1
DRAWING NO: A9.1
REV: SHEET 0.



INFO / SERVICE WALL A

NOTE: INFO / SERVICE WALL A IS TO BE DEDICATED TO DISPLAYING 3RD PARTY ADVERTISING, EACH OF THE INTERIOR AND EXTERIOR DISPLAY SURFACES HAVE OPTIONS REGARDING THE ELEVATIONS TO THE RIGHT, WHICH CAN BE COMBINED IN DIFFERENT WAYS, AT VENTURER'S DISCRETION AS FOLLOWS:






1. INTERIOR (DIGITAL SCREEN WITH EXTERIOR BACKLIT POSTER DISPLAY) OPTION (OPEN FOR MAINTENANCE ACCESS)
2. INTERIOR (DIGITAL SCREEN WITH BLANK EXTERIOR) (EXTERIOR OPEN FOR MAINTENANCE ACCESS)
3. INTERIOR (DIGITAL SCREEN WITH BLANK EXTERIOR) (EXTERIOR OPEN FOR MAINTENANCE ACCESS)
4. INTERIOR (BACKLIT POSTER DISPLAY WITH BLANK EXTERIOR) (EXTERIOR OPEN FOR MAINTENANCE ACCESS)

EACH OF THE DIGITAL SCREEN AND BACKLIT POSTER DISPLAY ARE TO BE SURROUNDED BY SCREENS.

THE DETAIL PLANS ON THE SHEET SHOW EACH OF THE INTERIOR AND EXTERIOR OPTIONS, FROM THESE, THE DIFFERENT COMBINATIONS ABOVE CAN BE INTERPRETTED.

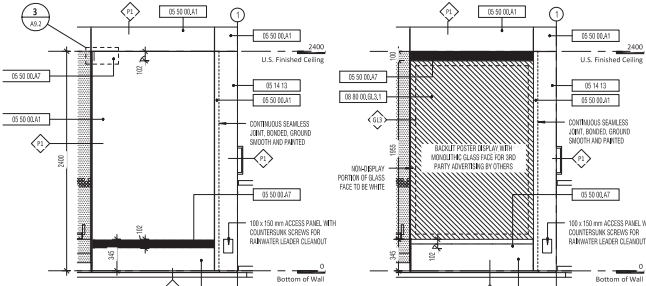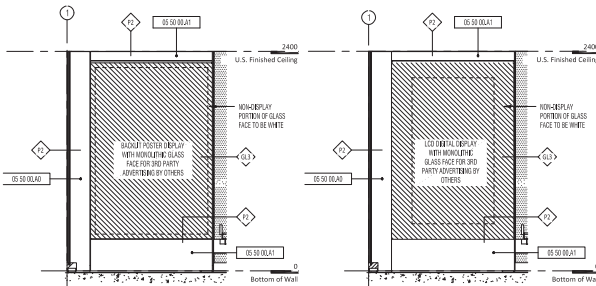

KEYNOTE LEGEND	
NO.	DESCRIPTION
05 30 00	CAST-IN-PLACE CONCRETE
05 14 00	STRUCTURAL ALUMINUM FRAMING
05 14 13	ARCHITECTURALLY EXPOSED STRUCTURAL ALUMINUM FRAMING
05 31 00.01	STEEL ROOF CEILING
05 50 00.00	ALUMINUM SHEET
05 50 00.01	3mm ALUMINUM PLATE
05 50 00.06	3mm PERFORATED ALUMINUM PLATE
05 50 00.07	PVC SUBWATER LEADER
05 50 00.02	RAINWATER LEADER CLEANOUT
05 50 00.05	ALUMINUM GUTTER
07 42 01.01	ALUMINUM LED LIGHT PANELS
07 54 20.02	PVC MEMBRANE ROOF ON 13mm SHEATHING BOARD
05 80 00.03.1	BRAN CLEAR LOW-IRON TEMPERED GLASS
05 80 00.03.2	SMALL LOW-IRON TEMPERED GLASS WITH WHITE CERAMIC ON BACK
05 27 20.01	LED SCREEN

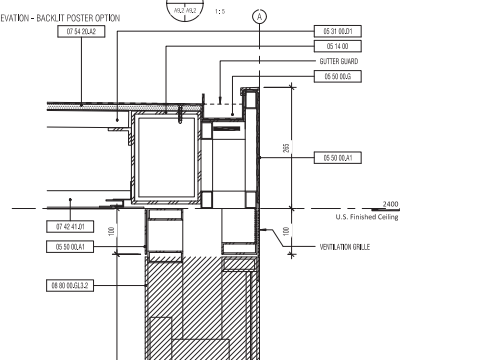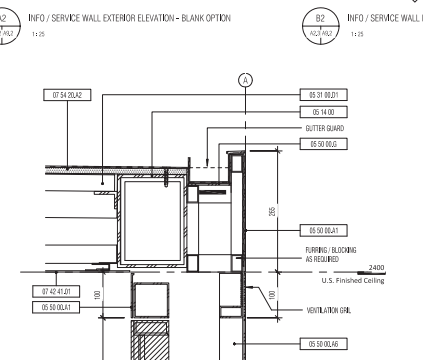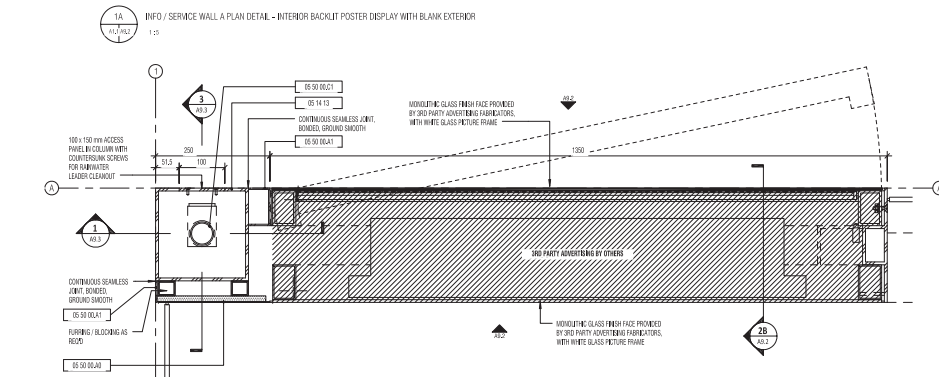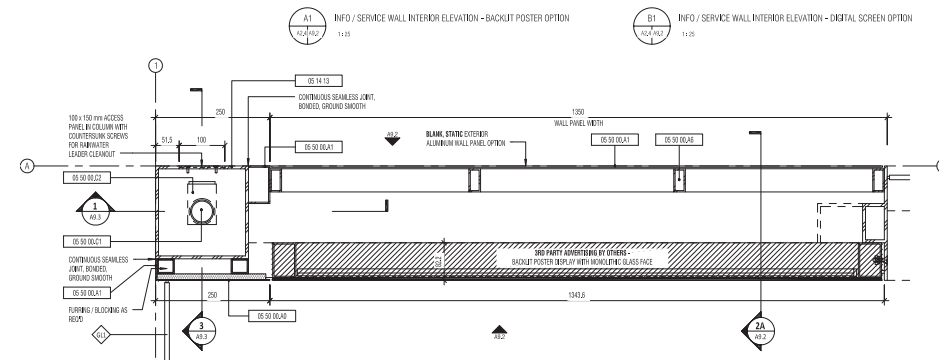

METRIC
ALL DIMENSIONS SHOWN ARE IN METERS AND/OR MILLIMETERS UNLESS OTHERWISE NOTED

REFERENCE DRAWINGS		ISSUE		REVISIONS			
		1	2015/08/12	50% DETAILED DESIGN	1	2016/02/01	100% DETAILED DESIGN (DRAFT) - REVISED
		2	2015/10/07	75% DETAILED DESIGN			
		3	2016/01/27	100% DETAILED DESIGN (DRAFT)			
		4	2016/08/02	100% DETAILED DESIGN			

DRAWN BY: JDG
DESIGNED BY: gh3
CHECKED BY: PH
2016/07/26
APPROVED BY: PH
2016/07/26
SCALE: FULL SIZE ONLY
As indicated



GO SHELTER DESIGNS
GENERAL
INFO / SERVICE WALL A DETAILS


METROLINX PROJECT NO. XXXXXX

CONTRACT NO: R00-2014-CON-06.1	DRAWING NO: A9.2	REV: 0.	SHEET
--------------------------------	------------------	---------	-------


DOOR FRAME




INTERIOR




EXTERIOR

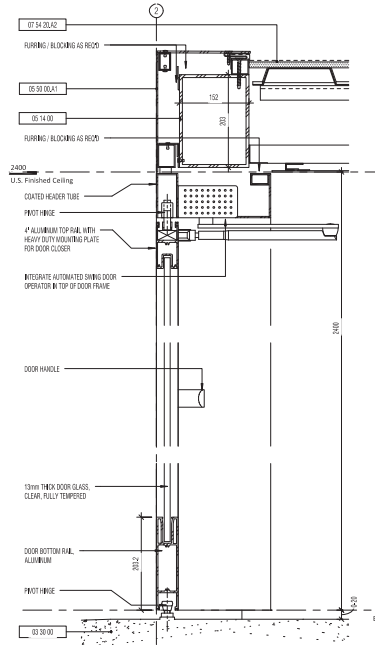


1 DOOR SECTION DETAIL
1:15

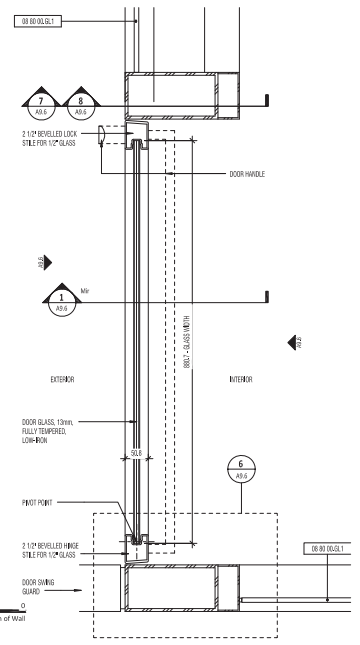


2 DOOR FRAME PLAN DETAIL
1:15

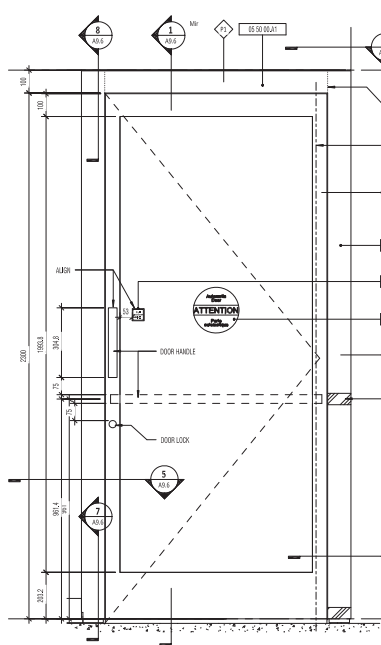


3 DOOR FRAME EXTERIOR ELEVATION DETAIL
1:10

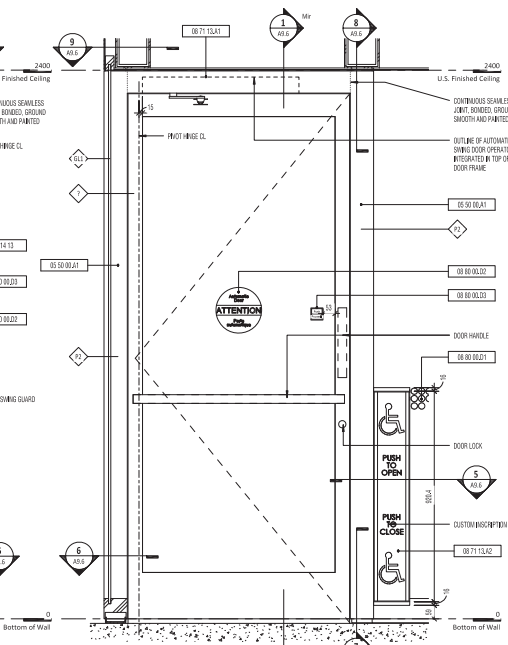


4 DOOR FRAME INTERIOR ELEVATION DETAIL
1:10

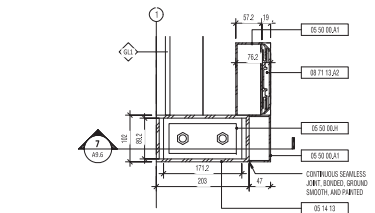


5 INTERIOR DOOR BUTTON PLAN DETAIL
1:15

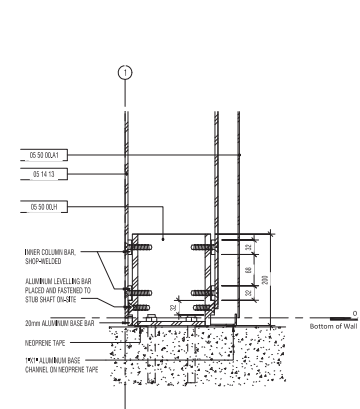

7 DOOR FRAME BASE SECTION DETAIL
1:15

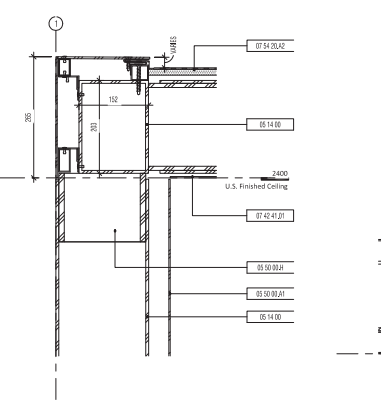

8 DOOR FRAME TOP SECTION DETAIL
1:15

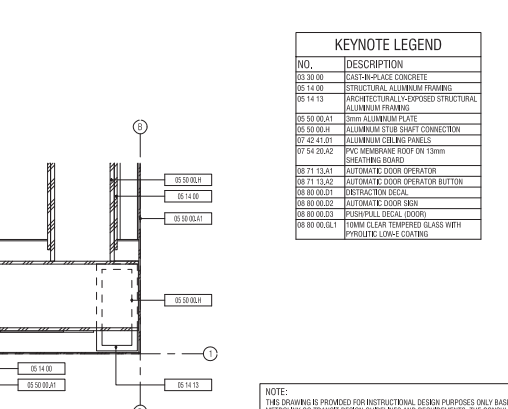

9 ROOF CORNER PLAN SECTION DETAIL
1:15

KEYNOTE LEGEND	
NO.	DESCRIPTION
03 30 00	CAST-IN-PLACE CONCRETE
05 14 00	STRUCTURAL ALUMINUM FRAMING
05 14 13	ARCHITECTURALLY-EXPOSED STRUCTURAL ALUMINUM FRAMING
05 50 00.01	3mm ALUMINUM FILM
05 50 00.01	ALUMINUM STUB SHAFT CONNECTION
07 42 41.01	ALUMINUM CBLM PANELS
07 54 20.02	PVC MEMBRANE ROOF OR 15mm SHEATHING BOARD
08 71 13.01	AUTOMATIC DOOR OPERATOR
08 71 13.02	AUTOMATIC DOOR OPERATOR BLUTTON
08 80 00.01	ALUMINUM CBLM PANELS
08 80 00.02	AUTOMATIC DOOR SIGN
08 80 00.03	PERSPECTIVE DECAL (DOOR)
08 80 00.01.1	10MM CLEAR TEMPERED GLASS WITH PYROLYTIC LOW-E COATING

NOTE: THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON METROLINX GO TRANSIT DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SPECIFIC SITE CONDITIONS AND INTERDISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS.

METRIC
ALL DIMENSIONS SHOWN ARE IN METERS AND/OR MILLIMETERS UNLESS OTHERWISE NOTED

METROLINX PROJECT NO. XXXXXX

REFERENCE DRAWINGS		ISSUE		REVISIONS				
		1	2015/08/12	50% DETAILED DESIGN	1	2016/02/01	100% DETAILED DESIGN (DRAFT)-REVISED	
		2	2015/10/07	75% DETAILED DESIGN				
		3	2016/03/27	100% DETAILED DESIGN (DRAFT)				
		4	2016/08/02	100% DETAILED DESIGN				
REV:		REV:		NO:	DATE:	ISSUED FOR:	REV:	DATE:






DRAWN BY: JDG
DESIGNED BY: gh3
CHECKED BY: PH
2016/07/26
APPROVED BY: PH
2016/07/26
SCALE: FULL SIZE ONLY
As indicated



GO SHELTER DESIGNS
GENERAL
DOOR FRAME DETAILS







CONTRACT NO: RQD-2014- CON-06.1	DRAWING NO: A9.6	REV: 0.	SHEET 0.
---------------------------------------	---------------------	------------	-------------

BENCHES

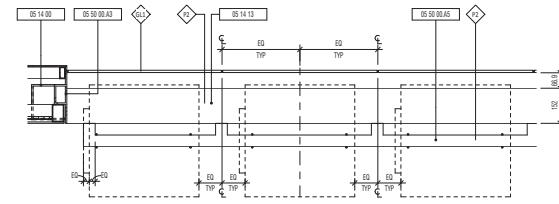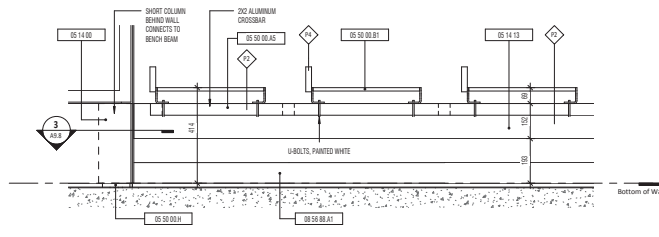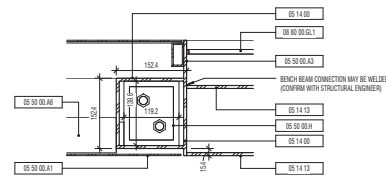

KEYNOTE LEGEND	
NO.	DESCRIPTION
05 14 00	STRUCTURAL ALUMINUM FRAMING
05 14 13	ARCHITECTURALLY EXPOSED STRUCTURAL ALUMINUM FRAMING
05 50 00 A1	5mm ALUMINUM PLATE
05 50 00 A3	6.4mm ALUMINUM PLATE
05 50 00 A5	ALUMINUM EXTRUSION
05 50 00 B8	ALUMINUM FRAMING
05 50 00 B1	BENCH SEATS
05 50 00 7	ALUMINUM BIKE SYMBOL
05 50 00 H	ALUMINUM STUB SHAFT CONNECTION
07 54 20 A1	PVC MEMBRANE ROOF ON 22mm PLYWOOD DECK
08 56 88 A1	CUSTOM ALUMINUM GLAZING SHOE
08 80 00 G1	10MM CLEAR TEMPERED GLASS WITH PYROLYTIC LOW-E COATING

GO BIKE SYMBOL

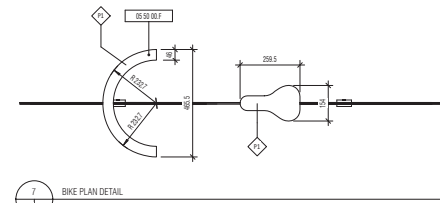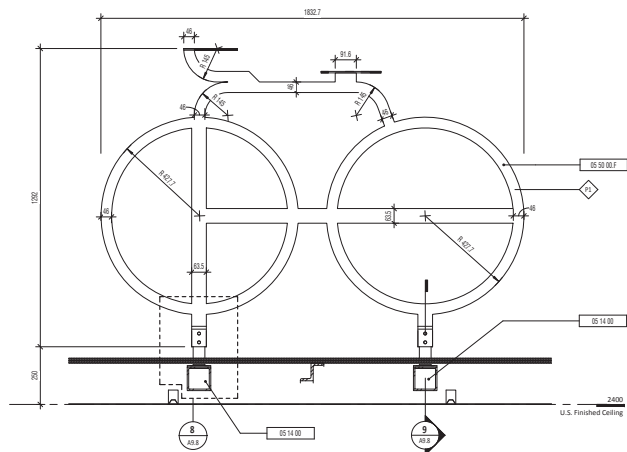

METRIC

ALL DIMENSIONS SHOWN ARE IN METERS AND/OR MILLIMETERS UNLESS OTHERWISE NOTED.

REV:	NO:	DATE:	ISSUED FOR:	REV:	DATE:

DRAWN BY: JDC	DESIGNED BY: gh3
CHECKED BY: PH 2016/07/26	APPROVED BY: PH 2016/07/26
SCALE: As indicated	



GO SHELTER DESIGNS
GENERAL
FURNISHINGS DETAILS


METROLINX PROJECT NO. XXXXXX

CONTRACT NO: R00-2014-C0N-061	DRAWING NO: A9.8	REV: 0.	SHEET
---	----------------------------	-------------------	--------------

CUSTOM POWER CABINET LOCATED INSIDE INFO-WALL.

EQUIPMENT AND DEVICES LOCATED IN SHELTER OUTSIDE OF INFO-WALL.

CUSTOM COMMUNICATION CABINET LOCATED INSIDE INFO-WALL.

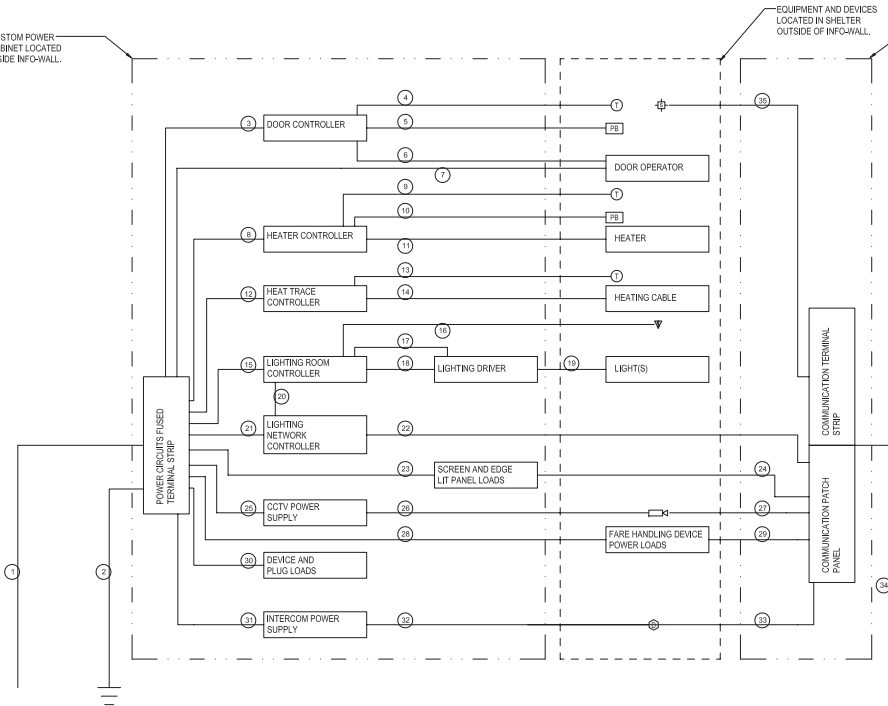

- 1 INCOMING POWER CIRCUITS. PROVIDE 1 27mm CONDUIT OF SUFFICIENT LENGTH TO RUN FROM CUSTOM BUILT ELECTRICAL CABINET TO 1m PAST THE EDGE OF THE SHELTER. CONDUIT INSTALLATION AND PROVISION OF WIRING BY OTHERS AT TIME OF INSTALLATION ON SITE.
- 2 ELECTRICAL SYSTEM GROUNDING. PROVIDE 1 27mm CONDUIT OF SUFFICIENT LENGTH TO RUN FROM CUSTOM BUILT ELECTRICAL CABINET TO 1m PAST THE EDGE OF THE SHELTER. PROVIDE A GROUNDING BAR INSIDE ELECTRICAL CABINET FOR FUTURE CONNECTION TO GROUNDING SYSTEM. GROUND ROD, GROUND WIRE AND CONDUIT INSTALLATION WILL BE BY OTHERS AT TIME OF INSTALLATION ON SITE.
- 3 15A 120V CIRCUIT FOR DOOR CONTROLLER. SHARE CIRCUIT WITH CCTV POWER SUPPLY AND INTERCOM POWER SUPPLY. PROVIDE A 15A FUSE IN TERMINAL STRIP, AND #12AWG CONDUCTORS FROM STRIP TO CONTROLLER.
- 4 LOW VOLTAGE CONTROL WIRING FROM LOW-VOLTAGE THERMOSTAT TO DOOR CONTROLLER. PROVIDE #14AWG CONDUCTORS FROM THERMOSTAT TO DOOR CONTROLLER.
- 5 LOW VOLTAGE CONTROL WIRING FROM PUSH BUTTON TO DOOR CONTROLLER. PROVIDE #14 AWG CONDUCTORS FROM THERMOSTAT TO DOOR CONTROLLER.
- 6 LOW VOLTAGE CONTROL WIRING FROM DOOR CONTROLLER TO DOOR OPERATOR. PROVIDE #14 AWG CONDUCTORS FROM CONTROLLER TO DOOR OPERATOR.
- 7 15A 120V CIRCUIT TO DOOR OPERATOR(S). PROVIDE A 15 A FUSE IN TERMINAL STRIP, AND #12AWG CONDUCTORS FROM TERMINAL STRIP TO OPERATOR. SHARE ONE CIRCUIT FOR ALL DOOR OPERATORS.
- 8 20A 208V CIRCUIT FOR INFRARED HEATER. PROVIDE A 20 A FUSE IN TERMINAL STRIP AND #12AWG CONDUCTORS FROM TERMINAL STRIP TO CONTROLLER. PROVIDE A DEDICATED CIRCUIT AND CONTROLLER FOR EACH HEATER.
- 9 LOW VOLTAGE CONTROL WIRING FROM THERMOSTAT TO HEATER CONTROLLER. PROVIDE #14AWG CONDUCTORS FROM THERMOSTAT TO ALL CONTROLLERS.
- 10 LOW VOLTAGE CONTROL WIRING FROM PUSH BUTTON TO HEATER CONTROLLER. PROVIDE #14AWG CONDUCTORS FROM PUSH BUTTON TO ALL CONTROLLERS.
- 11 208V POWER WIRING FROM CONTROLLER TO INFRARED HEATER. PROVIDE #10AWG CONDUCTORS FROM CONTROLLER TO HEATER.
- 12 20A 208V CIRCUIT FOR ELECTRIC HEAT TRACE. PROVIDE 20 A FUSE IN TERMINAL STRIP, AND #12AWG CONDUCTORS FROM TERMINAL STRIP TO CONTROLLER.
- 13 LOW VOLTAGE SENSOR WIRE. INSTALL HEAT TRACE TEMPERATURE SENSOR ON SHELTER ROOF. PROVIDE #14AWG CONDUCTORS FROM SENSOR TO CONTROLLER.
- 14 208V POWER WIRING FROM CONTROLLER TO HEATING CABLE CONNECTION. MOUNT WEATHERPROOF JUNCTION BOX ON SHELTER ROOF FOR CONNECTION TO HEATING CABLE. PROVIDE #10AWG CONDUCTORS FROM CONTROLLER TO JUNCTION.
- 15 15A 120V CIRCUIT FOR LIGHT FIXTURES. PROVIDE 15 A FUSE IN TERMINAL STRIP, AND #12AWG CONDUCTORS FROM TERMINAL STRIP TO ROOM CONTROLLER. PROVIDE A DEDICATED CIRCUIT TO THE ROOM CONTROLLER FOR EACH DRIVER SUPPLIED WITH THE SHELTER.
- 16 LOW VOLTAGE LIGHTING CONTROL WIRING. PROVIDE #14AWG CONDUCTORS FROM LIGHTING CONTROL DEVICES TO ROOM CONTROLLER.
- 17 0-10V DIMMING SIGNAL FROM ROOM CONTROLLER TO DRIVER(S). PROVIDE WIRING AS PER MANUFACTURER'S RECOMMENDATIONS.
- 18 15A 120V CIRCUIT FROM ROOM CONTROLLER TO DRIVER(S). PROVIDE #12AWG CONDUCTORS FROM CONTROLLER TO EACH DRIVER.
- 19 LOW VOLTAGE POWER WIRING FROM DRIVER(S) TO LIGHT FIXTURES. PROVIDE #12AWG CONDUCTORS FROM DRIVER(S) TO LIGHT FIXTURES.
- 20 LOW VOLTAGE LIGHTING CONTROL WIRING. PROVIDE WIRING AS PER MANUFACTURER'S RECOMMENDATIONS.
- 21 15A 120V CIRCUIT FOR NETWORK LIGHTING CONTROLLER. PROVIDE 15A FUSE IN TERMINAL STRIP AND #12AWG CONDUCTORS FROM TERMINAL STRIP TO CONTROLLER.
- 22 CAT5 DATA CABLE FROM NETWORK LIGHTING CONTROLLER TO PATCH PANEL IN CUSTOM ELECTRICAL ENCLOSURE.
- 23 15A 120V CIRCUIT(S) FOR EDGE LIT LED PANELS AND LCD SCREENS. PROVIDE ONE CIRCUIT FOR EVERY THREE SCREENS. FOR EACH CIRCUIT PROVIDE 15A FUSE IN TERMINAL STRIP AND #12AWG CONDUCTORS FROM TERMINAL STRIP TO DEVICE.
- 24 CAT5 DATA CABLE FROM EACH LCD SCREEN TO PATCH PANEL IN CUSTOM ELECTRICAL ENCLOSURE.
- 25 15A 120V CIRCUIT FOR CCTV POWER SUPPLY. SHARE A CIRCUIT WITH INTERCOM POWER SUPPLY AND DOOR CONTROLLER. PROVIDE 15A FUSE IN TERMINAL STRIP AND #12AWG CONDUCTORS FROM TERMINAL STRIP TO POWER SUPPLY.
- 26 LOW VOLTAGE POWER WIRING. PROVIDE #14AWG WIRING FROM CCTV POWER SUPPLY TO EACH CCTV CAMERA.
- 27 CAT5 CABLE FROM EACH CCTV CAMERA TO PATCH PANEL IN CUSTOM ENCLOSURE.
- 28 15A 120V CIRCUIT FOR FARE HANDLING DEVICES. PROVIDE ONE CIRCUIT FOR ALL HANDLING DEVICES. PROVIDE 15A FUSE IN TERMINAL STRIP, AND #12 AWG CONDUCTORS FROM TERMINAL STRIP TO HANDLING DEVICE.
- 29 CAT5 CABLE FROM EACH FARE HANDLING DEVICE TO PATCH PANEL IN CUSTOM ENCLOSURE.
- 30 15A 120V CIRCUIT FOR INFO-WALL MOUNTED DEVICES AND PLUGS. PROVIDE 1 CIRCUIT FOR ALL DEVICES. PROVIDE 15A FUSE IN TERMINAL STRIP, AND #12 AWG CONDUCTORS FROM TERMINAL STRIP TO DEVICES.
- 31 15A 120V CIRCUIT FOR INTERCOM POWER SUPPLY. SHARE A CIRCUIT WITH DOOR CONTROLLER AND CCTV POWER SUPPLY. PROVIDE 15A FUSE IN TERMINAL STRIP, AND #12AWG CONDUCTORS FROM TERMINAL STRIP TO POWER SUPPLY.
- 32 LOW VOLTAGE POWER WIRING FROM INTERCOM POWER SUPPLY TO INTERCOM STATION. PROVIDE #14AWG CONDUCTORS FROM POWER SUPPLY TO INTERCOM STATION.
- 33 CAT5 CABLE FROM INTERCOM STATION TO PATCH PANEL IN CUSTOM ENCLOSURE.
- 34 INCOMING DATA AND SPEAKER CABLING. PROVIDE A 35mm CONDUIT OF SUFFICIENT LENGTH TO RUN FROM CUSTOM BUILT ELECTRICAL CABINET TO 1m PAST THE EDGE OF THE SHELTER. CONDUIT INSTALLATION AND PROVISION OF WIRING BY OTHERS AT TIME OF INSTALLATION ON SITE.
- 35 SPEAKER CABLING. PROVIDE #14AWG CONDUCTOR FROM LOW VOLTAGE TERMINAL STRIP TO SPEAKER.


1 ELECTRICAL INTERCONNECTION DIAGRAM
R.T.S.

METRIC
ALL DIMENSIONS SHOWN
ARE IN METERS UNLESS
OTHERWISE NOTED


METROLINX PROJECT NO. XXXXXX

REFERENCE DRAWINGS		ISSUED		REVISIONS		DRAWN BY:	DESIGNED BY:		GO - Metrolinx Shelters	
No.	DATE	No.	DATE	No.	DATE	C/S	C/S		ELECTRICAL INTERCONNECTION DIAGRAM	
1	2016/07/26	1	2016/07/26						CONTRACT NO: R00-2014-061	
2	2016/07/26	2	2016/07/26						DRAWING NO: E0.2	
3	2016/07/26	3	2016/07/26					REV. SHEET		
								0.		

SCALE: 1 : 1 FULL SIZE ONLY

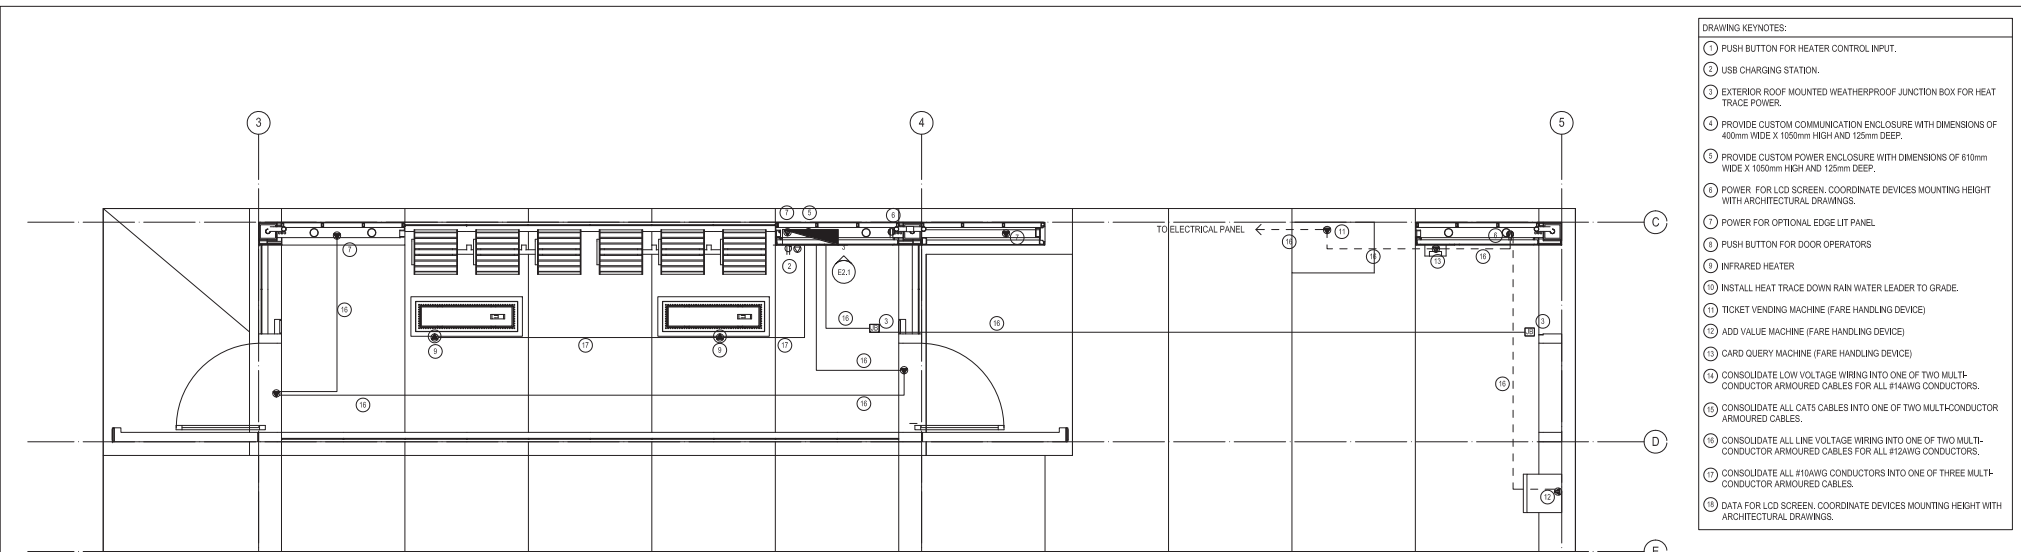

1 SHELTER TYPE 2 - ELECTRICAL LINE VOLTAGE PLAN
1:25

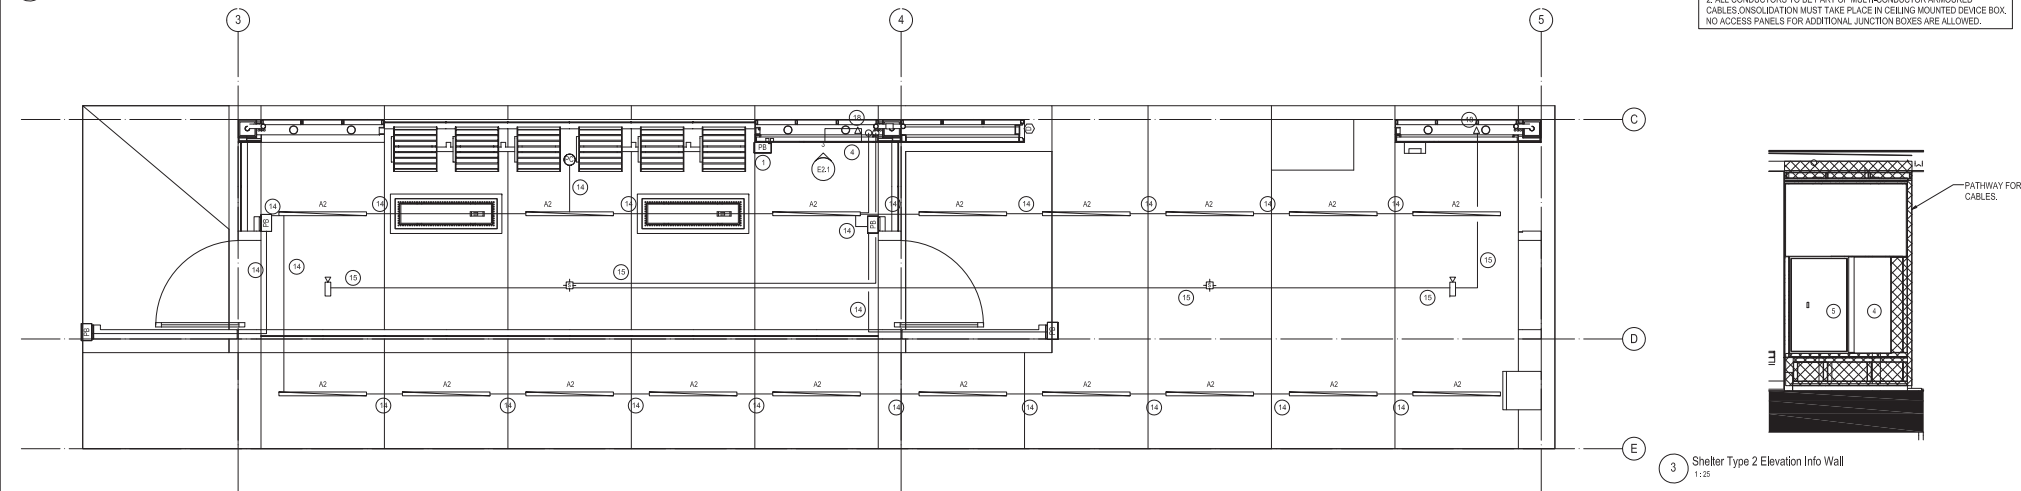


2 SHELTER TYPE 2 - ELECTRICAL LOW VOLTAGE PLAN
1:25

METRIC
ALL DIMENSIONS SHOWN
ARE IN METERS UNLESS
OTHERWISE NOTED

- DRAWING KEYNOTES:**
- 1 PUSH BUTTON FOR HEATER CONTROL INPUT.
 - 2 USB CHARGING STATION.
 - 3 EXTERIOR ROOF MOUNTED WEATHERPROOF JUNCTION BOX FOR HEAT TRACE POWER.
 - 4 PROVIDE CUSTOM COMMUNICATION ENCLOSURE WITH DIMENSIONS OF 400mm WIDE X 1050mm HIGH AND 125mm DEEP.
 - 5 PROVIDE CUSTOM POWER ENCLOSURE WITH DIMENSIONS OF 610mm WIDE X 1050mm HIGH AND 125mm DEEP.
 - 6 POWER FOR LCD SCREEN. COORDINATE DEVICES MOUNTING HEIGHT WITH ARCHITECTURAL DRAWINGS.
 - 7 POWER FOR OPTIONAL EDGE LIT PANEL.
 - 8 PUSH BUTTON FOR DOOR OPERATORS
 - 9 INFRARED HEATER
 - 10 INSTALL HEAT TRACE DOWN RAIN WATER LEADER TO GRADE.
 - 11 TICKET VENDING MACHINE (FARE HANDLING DEVICE)
 - 12 ADD VALUE MACHINE (FARE HANDLING DEVICE)
 - 13 CARD QUERY MACHINE (FARE HANDLING DEVICE)
 - 14 CONSOLIDATE LOW VOLTAGE WIRING INTO ONE OF TWO MULTI-CONDUCTOR ARMoured CABLES FOR ALL #14AWG CONDUCTORS.
 - 15 CONSOLIDATE ALL CAT5 CABLES INTO ONE OF TWO MULTI-CONDUCTOR ARMoured CABLES.
 - 16 CONSOLIDATE ALL LINE VOLTAGE WIRING INTO ONE OF TWO MULTI-CONDUCTOR ARMoured CABLES FOR ALL #12AWG CONDUCTORS.
 - 17 CONSOLIDATE ALL #10AWG CONDUCTORS INTO ONE OF THREE MULTI-CONDUCTOR ARMoured CABLES.
 - 18 DATA FOR LCD SCREEN. COORDINATE DEVICES MOUNTING HEIGHT WITH ARCHITECTURAL DRAWINGS.

- DRAWING NOTES:**
1. INSTALL HEAT TRACE PARALLEL ALONG CORRUGATION LINES, AND ACCORDING TO MANUFACTURER'S INSTRUCTIONS.
 2. ALL CONDUCTORS TO BE PART OF MULTI-CONDUCTOR ARMoured CABLES. CONSOLIDATION MUST TAKE PLACE IN CEILING MOUNTED DEVICE BOX. NO ACCESS PANELS FOR ADDITIONAL JUNCTION BOXES ARE ALLOWED.



3 Shelter Type 2 Elevation Info Wall
1:25

NOTE:
THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON METROLINX GO TRANSIT DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SITE-SPECIFIC CONDITIONS AND INTERDISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS.

METROLINX PROJECT NO. XXXXXX

REFERENCE DRAWINGS			ISSUED			REVISIONS		
No.	DATE	DESCRIPTION	No.	DATE	DESCRIPTION	No.	DATE	DESCRIPTION
1	2016/07/26	ISSUE FOR PERMIT SUBMITTAL						
2	2016/07/26	ISSUE FOR PERMIT SUBMITTAL						
3	2016/07/26	ISSUE FOR PERMIT SUBMITTAL						
4	2016/07/26	ISSUE FOR PERMIT SUBMITTAL						
5	2016/07/26	ISSUE FOR PERMIT SUBMITTAL						
6	2016/07/26	ISSUE FOR PERMIT SUBMITTAL						

DRAWN BY: BRM
DESIGNED BY: INTEGRAL GROUP
CHECKED BY: CVB
2016/07/26
APPROVED BY: BG
2016/07/26
SCALE: FULL SIZE ONLY
As indicated



GO - Metrolinx Shelters

SHELTER TYPE 2 - CARPOOL LOTS PASSENGER SHELTER - POWER AND LIGHTING PLANS

CONTRACT NO: R00-2014- CON-061	DRAWING NO: E2.1	REV: SHEET 0.
--------------------------------------	---------------------	------------------

METRIC

ALL DIMENSIONS SHOWN ARE IN METERS AND/OR MILLIMETERS UNLESS OTHERWISE NOTED

DRAWING LEGEND AND ABBREVIATIONS

UNLESS OTHERWISE NOTED, DESIGN LOADS SHOWN ARE SPECIFIED UNFACTORED LOADS. TO BE USED FOR ALL DESIGN, FOR POINT LOADS, IF ONLY ONE LOAD IS GIVEN, CONSIDER THE LOAD FOR WIND AND SNOW LOADS TO BE USED FOR SLS DESIGN. REFER TO MATERIAL AND DESIGN DATA NOTES.

AB	ANCHOR BOLT	LE	LEFT END
AESS	ARCHITECTURALLY EXPOSED STRUCTURAL STEEL	LG	LONG LENGTH
AI	FACTORED AXIAL LOAD IN N	LL	UPPER LEVEL BRACKET
AL	INDICATES TENSION	LL	LOWER LEVEL BRACKET
ALC	ALTERNATE	LLH	LONG LEG HORIZONTAL
ARCHL	ARCHITECTURAL	LVH	LONG LEG VERTICAL
B. BOT.	BOTTOM	LBV	LONG LEG VERTICAL
BOP	BORED CONCRETE PILE	LBV	LONG LEG VERTICAL
BEV	BOTTOM EACHWAY	LP	LOW POINT
BL	BOTTOM LOWER LAYER	MAX.	MAXIMUM
BLU	BOTTOM LOWER LAYER BEAM	MF	FACTORED MOMENT IN N·m
BCC	ELEV. BOT. OF CARBON (BORED CONCRETE PILE)	MJ	MOVEMENT JOINT
BOP	ELEV. BOTTOM OF FOOTING	MIN.	MINIMUM
BOP	ELEV. BOTTOM OF PILE	MC	MOMENT CONNECTION
BP	REINFORCING PLATE	MT	FACTORED TORSION IN N·m
BSMT	BASEMENT	NBC	NATIONAL BUILDING CODE OF CANADA
BSL	BOTTOM UPPER LAYER	NF	NEAR FACE
BLP	BOTTOM OF UNDERPINNING	NTS	NOT TO SCALE
CA	COLUMN ABOVE ONLY (NO COLUMN BELOW)	OC	ONWARD BILLING CODE
CAL	CANTILEVER	OC	ON CENTRE
CANT.	CANTILEVER	OD	OUT TO OUT
CB	COLUMN BELOW	OP	OPENING
C	CENTRE TO CENTRE	P	POINT LOAD IN N
C/C	CUT OFF ELEMENT FOR PILES	PF	FACTORED POINT LOAD IN N
CC	CONCRETE REPROOFED	PL	PLATE
CCJ	CONCRETE JOINT	RA	ROCK ANCHOR
CL	CLEAR	RE	REINFORCEMENT
C	CENTRELINE	REIN.	REINFORCEMENT
CNT	STEEL DECK CORE NOMINAL THICKNESS	RE	RIGHT END
COMP.	COMPOSITE	RF	REIN. FRAME
CONSTR./J.	CONSTRUCTION JOINT	RF	FACTORED VERTICAL REACTION IN N
COL	COLUMN	RHT	FACTORED HORIZONTAL REACTION IN N
CONC.	CONCRETE	SCA	STEP DOWN FOOTING IN DIRECTION OF ARROW
CONT.	CONTINUOUS	SDF	STEP DOWN FOOTING
CP	CONNECTION PLATE	SOL	SUPPLEMENTED
CYS	SEE GENERAL NOTES	SQ	SECTION
CSS	SEE GENERAL NOTES	SMA	SIMILAR
DCA	DRILLED CONCRETE ANCHOR	SJ	STEEL JOINT
DET.	DETAIL	SLS	SERVICEABILITY LIMIT STATE
D.F.A.	DOUGLAS FIR LARCH	SLP	SLAB
Ø	DIAMETER	SLA	SHELF ANGLE & ETC
Ø	DIMENSION	SOS	SLAB ON GRADE
DMA	DRILLED MASONRY ANCHOR	SP	SPRUCE PINE FIR
DN	DOWN	STR.	STRIP
DD	DEPTH	STIFF.	STIFFENER
DR	DRAWING	T	THICKNESS
DRAWL	DRAWL	TE	TOP
EA	EACH	TEW	TOP EACHWAY
EPR	EPOXY COATED REINFORCEMENT	TH	THICK
EE	EACH END	TI	TOP LEFT END
EF	EACH FACE	TI	TOP RIGHT END
EL EXP. JT.	EXPANSION JOINT	TLL	TOP LOWER LAYER
EL. ELEV.	ELEVATION	TOP	TOP OF FOOTING
EMBED.	EMBEDMENT	TOP	TOP OF FILE
EQ.	EQUAL	TR	TOP OF TRILE CAP
EX. CABL.	EXPANDING	TR	TOP RIGHT END
EXP. JT.	EXPANSION JOINT	TUL	TOP UPPER LAYER
FD	FLOOR DRAIN	TY	TYPICAL
FF	FAR FACE	ULS	ULTIMATE LIMIT STATE
FIN.	FINISHED	US	UNDERSE
FL	FLOOR	UN	UNLESS NOTED
FMC	FULL MOMENT CONNECTION	UPT.	UPTURNED
FTL	FOOTING	V	VERTICAL BRACING
F _y	COMPRESSIVE STRENGTH OF CONC IN MPa	V.VEP	VERTICAL VERTICAL EACH FACE
f _y	YIELD STRENGTH IN MPa	V	FACTORED SHEAR IN N
GALV.	GALVANIZED STEEL	V.C.	VERTICAL VERTICALS
GB	GRADE BEAM	V.V.C.	VERTICALLY SLOTTED CONNECTION TO ALLOW FOR DEFLECTION
GR	GRADE	WC	WIND COLUMN
H	TOTAL THICKNESS	WVA	WINDOW WASHING ANCHORS
H. HOR.	HORIZONTAL	WVF	WELDED WIRE FABRIC
HSD	HOT DIPPED GALVANIZED	ZPP	ZINC RICH PAINT
HSP	HORIZONTAL EACH FACE	X	SECTION NUMBER
HI	HOOK/HOOK (HOOK EACH END)	Y	SECTION DRAWING
HOLE	HOLE THROUGH CONCRETE BEAM	Z	REFERENCE
HOLE	HOLE THROUGH STEEL BEAM	Z	MASONRY WALL
HOC	HORIZONTAL IN CENTRE	Z	FULLY GROUTED MASONRY WALL
HOK	HOOK	Z	STRUCTURAL PRECAST CONCRETE
HP	HIGH POINT		
IB	INTEGRITY BARS INTERIOR		
IE	INTEGRITY BARS EXTERIOR		
JG	JOIST GIRDER		
K	TENSION DEVELOPMENT LENGTH OF REBAR		
L	SINGLE ANGLE		
LA	DOUBLE ANGLE		

STRUCTURAL DRAWING LIST

S0.1 -	GENERAL NOTES AND DRAWING LIST
S1.1 -	SHELTER TYPE 1 - RAIL LINE STATIONS PASSENGER SHELTERS - PLANS AND DETAIL
S2.1 -	SHELTER TYPE 2 - CARPOOL LOT SHELTERS - PLANS
S2.2 -	SHELTER TYPE 2 - CARPOOL LOT SHELTERS - DETAILS
S3.1 -	SHELTER TYPE 3 - ON-STREET BUS SHELTERS - PLANS AND DETAILS
S4.1 -	SHELTER TYPE 4 - SMALL BIKE SHELTERS - PLANS AND DETAILS
S5.1 -	SHELTER TYPE 5 - LARGE BIKE SHELTERS - PLANS AND DETAILS
S6.1 -	SHELTER TYPE 6 - AMENITIES SHELTERS - PLANS AND DETAILS

STRUCTURAL WORK

- GENERAL
- PROVIDE ALL MATERIAL AND LABOUR REQUIRED FOR THE COMPLETION OF THE WORK, BREAKDOWN OF WORK BY TRADE IS FOR GUIDANCE ONLY AND IS NOT NECESSARILY COMPLETE.
- COORDINATE ALL WORK SHOWN ON THE STRUCTURAL DRAWINGS WITH ARCHITECTURAL, MECHANICAL, ELECTRICAL, ALL OTHER DISCIPLINES AND EXISTING CONDITIONS (EXISTING CONDITIONS ARE ASSUMED); REPORT ANY INCONSISTENCIES TO THE CONSULTANT BEFORE PROCEEDING WITH THE WORK.
- MAKE GOOD ALL EXISTING WORK DISTURBED BY THE SHORING OPERATIONS, EXCAVATION AND OTHER CONSTRUCTION PROCEDURES.
- DO NOT SCALE THESE DRAWINGS.
- SEE ARCHITECTURAL DRAWINGS FOR PREPROOFING REQUIREMENTS.
- CODES AND STANDARDS
- COMPLY WITH THE REQUIREMENTS OF THE 2012 ONTARIO BUILDING CODE IN FORCE AND THE OCCUPATIONAL HEALTH AND SAFETY ACT AND REGULATIONS FOR CONSTRUCTION PROJECTS.

METROLINX PROJECT NO. XXXXXX

GO SHELTER DESIGNS
GENERAL NOTES AND
DRAWING LIST




REFERENCE DRAWINGS		ISSUE		REVISIONS	
		1	2016/07/26	1	ISSUED FOR
		2	2016/07/26		
		3	2016/07/26		
		4	2016/07/26		
REV:	REV:	NO:	DATE:	ISSUED FOR:	REV:

DRAWN BY:	DESIGNED BY:
DEB	RYS
CHECKED BY:	APPROVED BY:
RYS	
2016/07/26	
SCALE: 1 : 25	FULL SIZE ONLY

CONTRACT NO:	DRAWING NO:	REV:	SHEET
ROQ-2014-	S0.1	0.	
CON-06.1			


METRIC

ALL DIMENSIONS SHOWN ARE IN METERS AND/OR MILLIMETERS UNLESS OTHERWISE NOTED

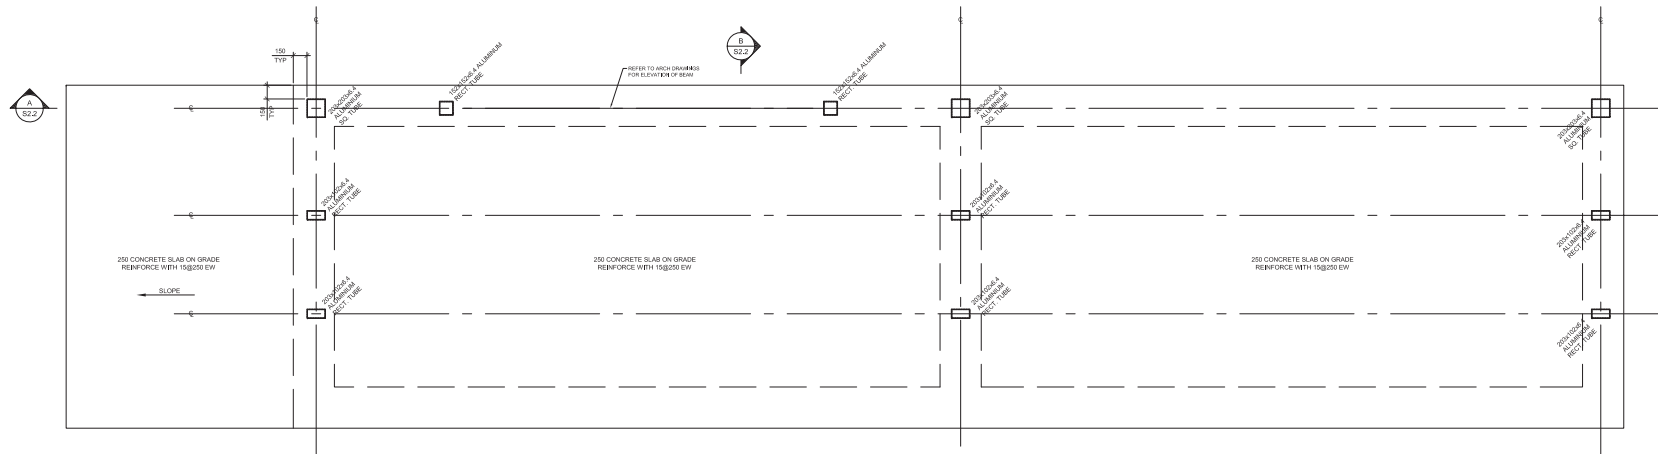

CARPOOL LOT SHELTERS FOUNDATION PLAN

1. FOR THE STRUCTURAL GENERAL NOTES, REFER TO SPECIFICATION SECTION.
2. GROUT BASE PLATES AND BEARING PLATES PRIOR TO PLACING LOADS ON STRUCTURE.
3. REFER TO ARCHITECTURAL DRAWINGS FOR DIMENSIONS AND GRIDLINES.
4. REFER TO ARCH DINGS FOR SLOPE.

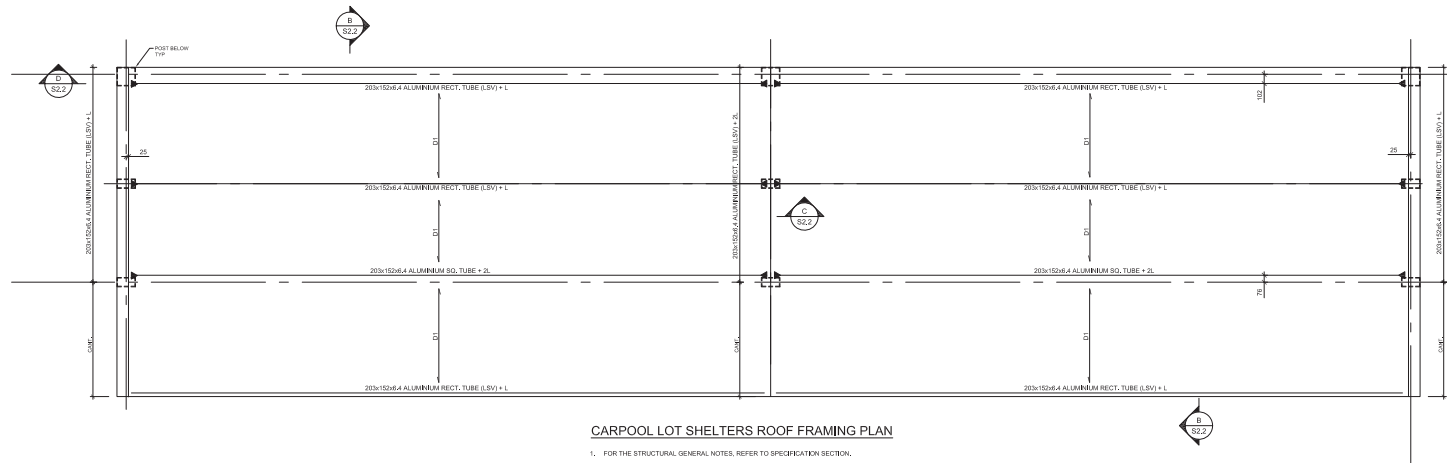

CARPOOL LOT SHELTERS ROOF FRAMING PLAN

1. FOR THE STRUCTURAL GENERAL NOTES, REFER TO SPECIFICATION SECTION.
2. FOR ROOF DATUM ELEVATION AND DIMENSIONS REFER TO ARCHITECTURAL DRAWINGS.
3. UNLESS NOTED OTHERWISE ON PLAN, DESIGN LOADS ARE:
LIVE LOAD (SNOW) = 2.4 kN/m² MINIMUM.
4. *10" ON PLAN DENOTES 38 DEEP GALVANIZED STEEL DECK (C24T=376) SECURED WITH SELF DRILLING TEK SCREWS 4 x 10" @ 300 mm.
5. ▶ MOMENT CONNECTIONS (W8x40, W10x40, CMT 10x10).
6. DESIGN THE COLUMN TO BEAM CONNECTION FOR A MINIMUM COMBINED FORCES OF 110kN, 140kN, 110kN, 140kN, 110kN, 140kN.
7. THERE SHALL BE NO WELDED CONNECTION UNLESS ALLOWED AND CONFIRMED WITH THE STRUCTURAL CONSULTANT.

NOTE:
THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON METROLINK GO TRANSIT DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SITE SPECIFIC CONDITIONS AND INTERDISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS.

METROLINK PROJECT NO. XXXXXX

GO SHELTER DESIGNS
SHELTER TYPE 2 - CARPOOL LOT SHELTERS
PLANS



CONTRACT NO: R00-2014- CON-061
DRAWING NO: S2.1
REV: 0, SHEET

REV:	REV:	NO:	DATE:	ISSUED FOR:	REV:	DATE:


REFERENCE DRAWINGS	ISSUE	REVISIONS

DRAWN BY: DEB	DESIGNED BY: RYS
CHECKED BY: RYS 2016/07/26	APPROVED BY:
SCALE: 1 : 25	FULL SIZE ONLY


END

METRIC


ALL DIMENSIONS SHOWN ARE IN METERS AND/OR MILLIMETERS UNLESS OTHERWISE NOTED

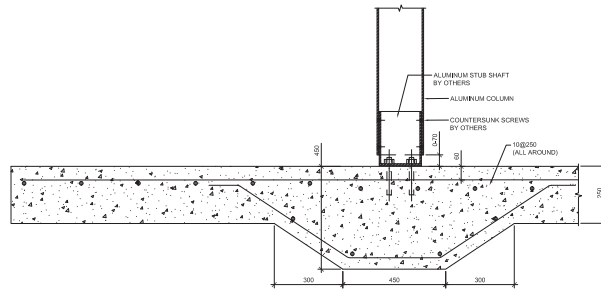


A TYPICAL SECTION
S2.2
1:15




TYPICAL BASE PLATE CONNECTION
DETAIL FOR 203x102 RECT. TUBE
SCALE: 1:25



TYPICAL BASE PLATE CONNECTION
DETAIL FOR 203x203 SQ. TUBE
SCALE: 1:25

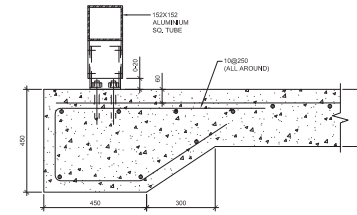


E TYPICAL BENCH BEAM
S1.1
1:10




B TYPICAL ROOF BEAM
S2.2
1:10

C TYPICAL ROOF BEAM
S2.2
1:10



D TYPICAL ROOF BEAM
S2.2
1:10

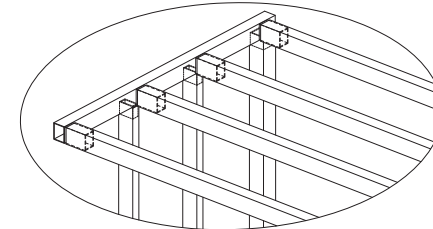

ISOMETRIC VIEW OF BEAM-COLUMN CONNECTION
NOT TO SCALE

NOTE:
THIS DRAWING IS PROVIDED FOR INSTRUCTIONAL DESIGN PURPOSES ONLY BASED ON METROLINK GO TRANSIT DESIGN GUIDELINES AND REQUIREMENTS. THE CONSULTANT SHALL VERIFY FOR LOCAL CODE COMPLIANCE, SITE SPECIFIC CONDITIONS AND INTERDISCIPLINARY DRAWING COORDINATION. ALL DIMENSIONS AND SPECIFICATIONS SHOULD BE VERIFIED BY CONSULTANT AND/OR CONTRACTOR BEFORE ACTUAL CONSTRUCTION BEGINS.

METROLINK PROJECT NO. XXXXXX

REFERENCE DRAWINGS		ISSUE		REVISIONS	
		1	2015/08/12	ISS. REVISED SHEET	
		2	2015/08/12	ISS. REVISED SHEET	
		3	2015/08/12	ISS. REVISED SHEET	
		4	2015/08/12	ISS. REVISED SHEET	
REV:	REV:	NO:	DATE:	ISSUED FOR:	REV: DATE:

DRAWN BY: DEB
DESIGNED BY: RYS
CHECKED BY: RYS
APPROVED BY: Approver
2015/08/12
SCALE: 1:25 FULL SIZE ONLY



GO SHELTER DESIGNS
SHELTER TYPE 2 - CARPOOL LOT SHELTERS
DETAILS

CONTRACT NO: RQD-2014- CON-061	DRAWING NO: S2.2	REV: 0.	SHEET
--------------------------------------	---------------------	------------	-------