


Burloak Drive: Latest Construction activities

August-November, 2024

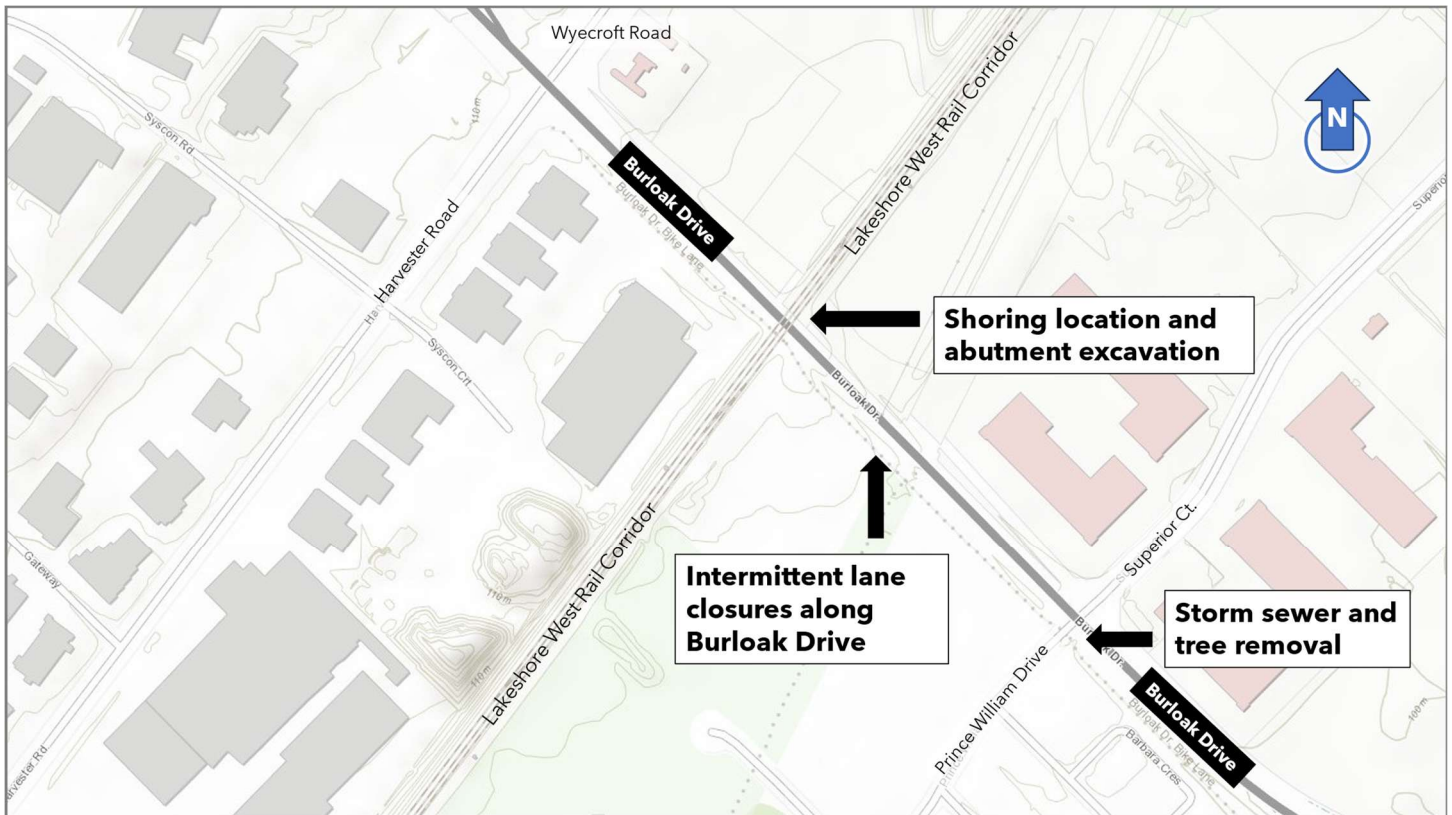

PROJECT OVERVIEW

Metrolinx's GO Expansion program is delivering more GO service across the network, including trains every 15- minutes or better on the Lakeshore West Rail Corridor. To support GO Expansion, we are upgrading the rail network and our GO stations to enable more frequent and fully accessible service.

To support the increase in GO Service, Metrolinx is working with the City of Burlington and the Town of Oakville to build the grade separation (separation of the road from the rail corridor) at Burloak Drive. This work will enhance pedestrian and vehicular safety and will optimize traffic flow at this crossing.

Information as of: July 24, 2024

WHAT WORK IS TAKING PLACE?

Construction activity	Scheduled Start Date	Expected Duration	Work Hours	Description of Work
Storm Sewer at Prince William Drive	August 12, 2024	Approximately 2-3 weeks	Daytime Works	Installation of storm sewer along Burloak Drive at Prince William Drive.
Shoring	August 2024	Approximately 6-8 weeks	Daytime and Overnight works	Drilling and installation of piles to support foundation and future excavation around the tracks. Lane closures will be required to complete the drilling within the roadway.
Hydro Duct Bank Works	August 2024	On-going	Daytime and Overnight works	Excavation, installation of trench boxes, pipe installation, back fill. Removal of six trees along Burloak Drive.
Abutment Excavation	September, 2024	Approximately 6-8 weeks	Daytime and Overnight works	Excavation within the rail corridor to prepare for the future installation of concrete superstructure for the grade separation.
Temporary Lane closures (recurring)	Ongoing until November 2024	Approximately 4 months	Daytime and Overnight works	Relocation of existing utilities. We will also need to undertake surveying activities, geotechnical drilling, and borehole sampling

Work durations are approximate, work may be rescheduled due to weather conditions or unforeseen circumstances.

WHAT TO EXPECT

Starting in August crews will be drilling and installing piles at the rail crossing at Burloak Drive. These piles will help support the foundation around the tracks for future excavations.

Crews will also be continuing the storm sewer and hydro duct bank work along Burloak Drive. Prince William and Burloak intersection will be closed for approx. 2-3 weeks starting August 12. Detour signage will be in place. Access to the plaza at 700-728 Burloak Drive will be maintained.

Please note that short term lane closures will occur until the end of November 2024. Overnight lane closures may be required to complete the road portion of the shoring.

Reasonable precautions to minimize disturbances to residents and businesses include, but are not limited to the following:

- Ongoing monitoring for noise and dust
- Regular sweeping of streets.
- Two-way traffic will be always maintained.
- Pedestrian and cyclist traffic will be maintained.

This construction notice can be translated into a different language upon request by emailing us at HaltonRegion@metrolinx.com

Cet avis de travaux de construction est disponible en français. Si vous êtes intéressé, veuillez envoyer un courriel à HaltonRegion@metrolinx.com

Contact Us:

- ✉ Write to us at: HaltonRegion@metrolinx.com
 - 🐦 Find us on Twitter [@GOExpansion](https://twitter.com/GOExpansion)
 - 🌐 Visit the website: <https://www.metrolinx.com/lakeshorewest>
- Sign up for the Halton Region [newsletter](#) for updates