




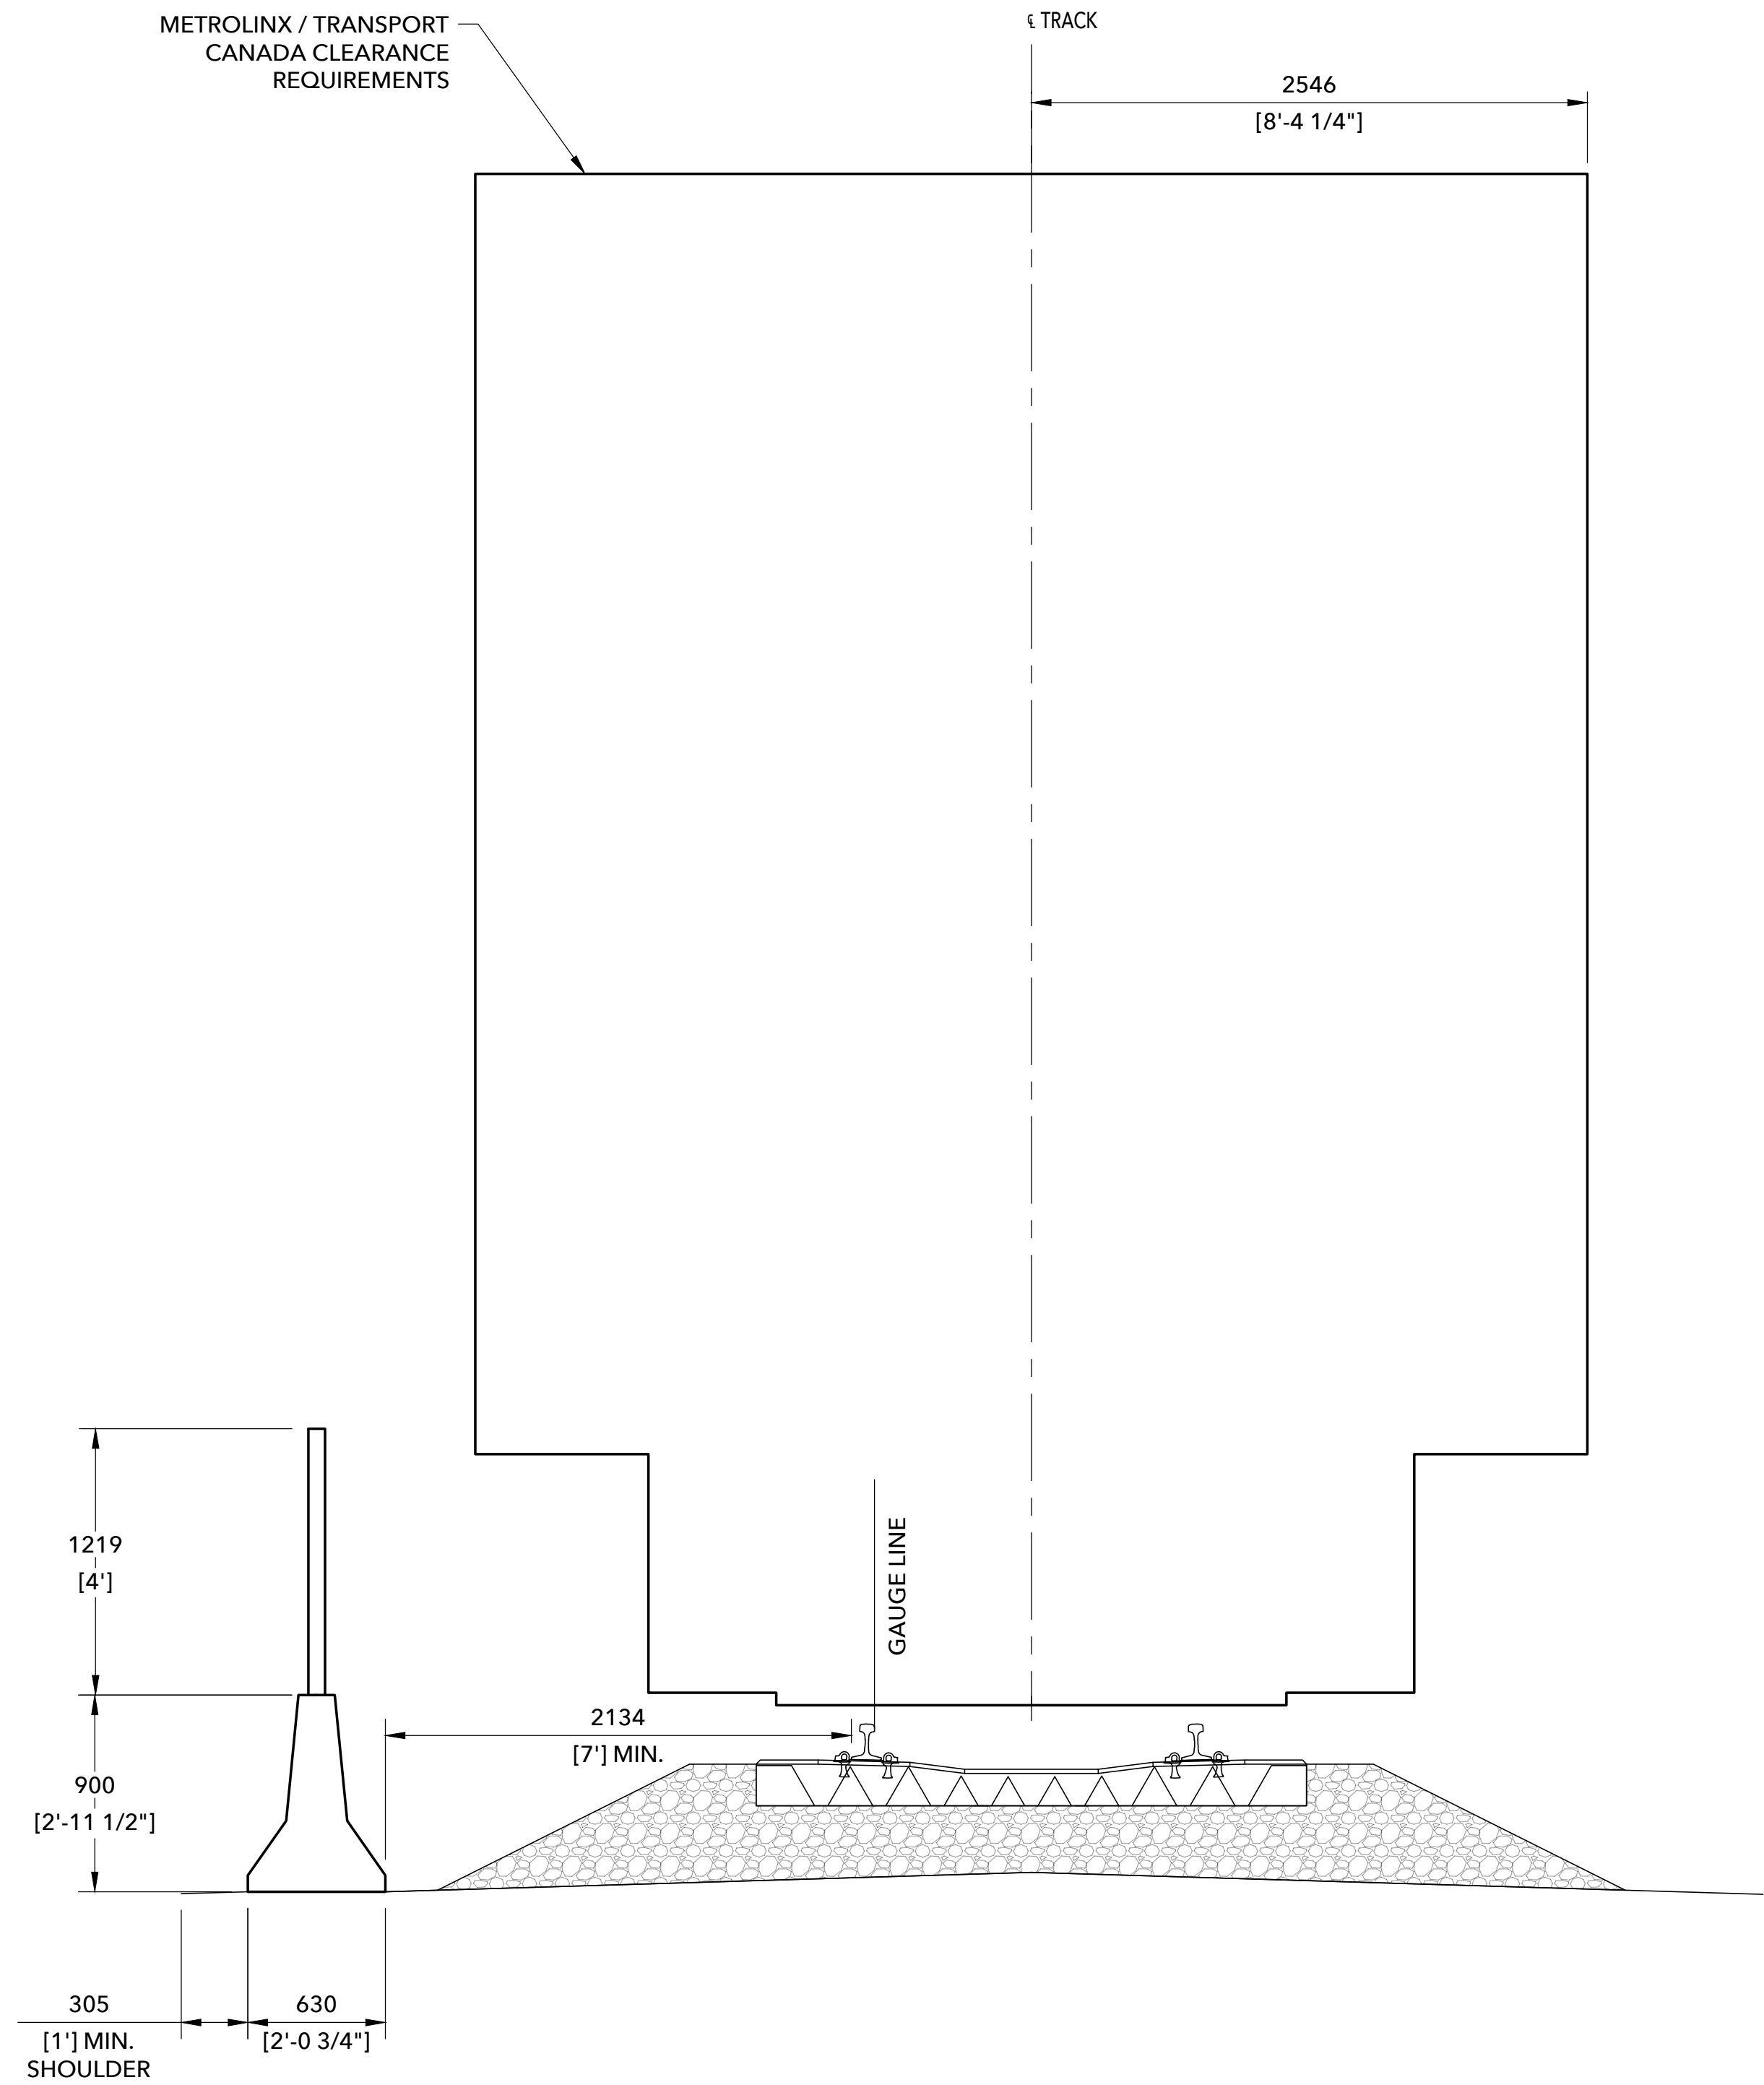


CONTINUOUS WORK ZONE (CWZ) FENCING LOCATION

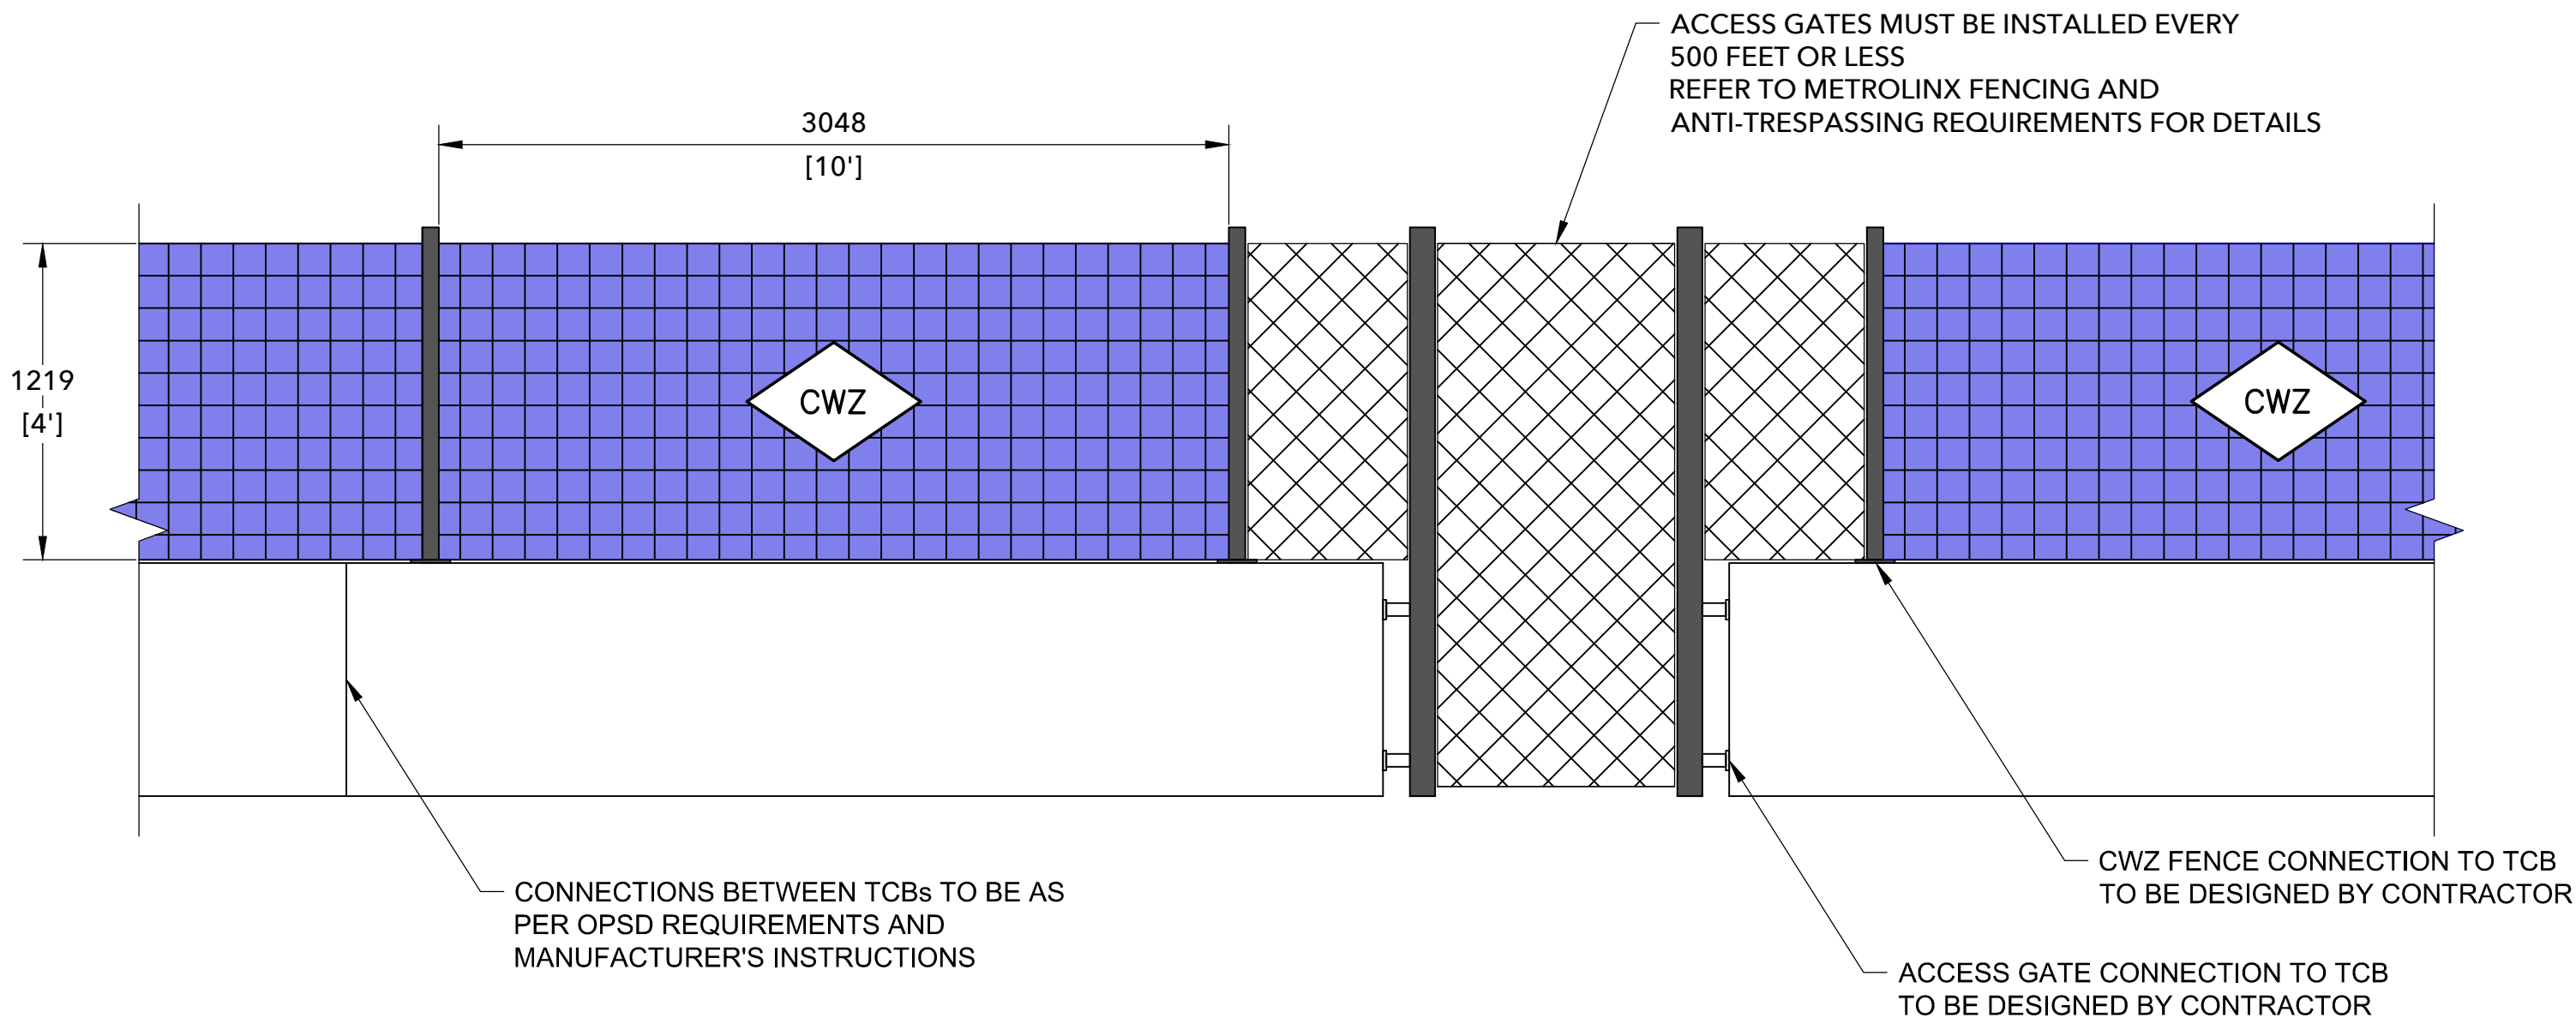

CWZ FENCING ELEVATION

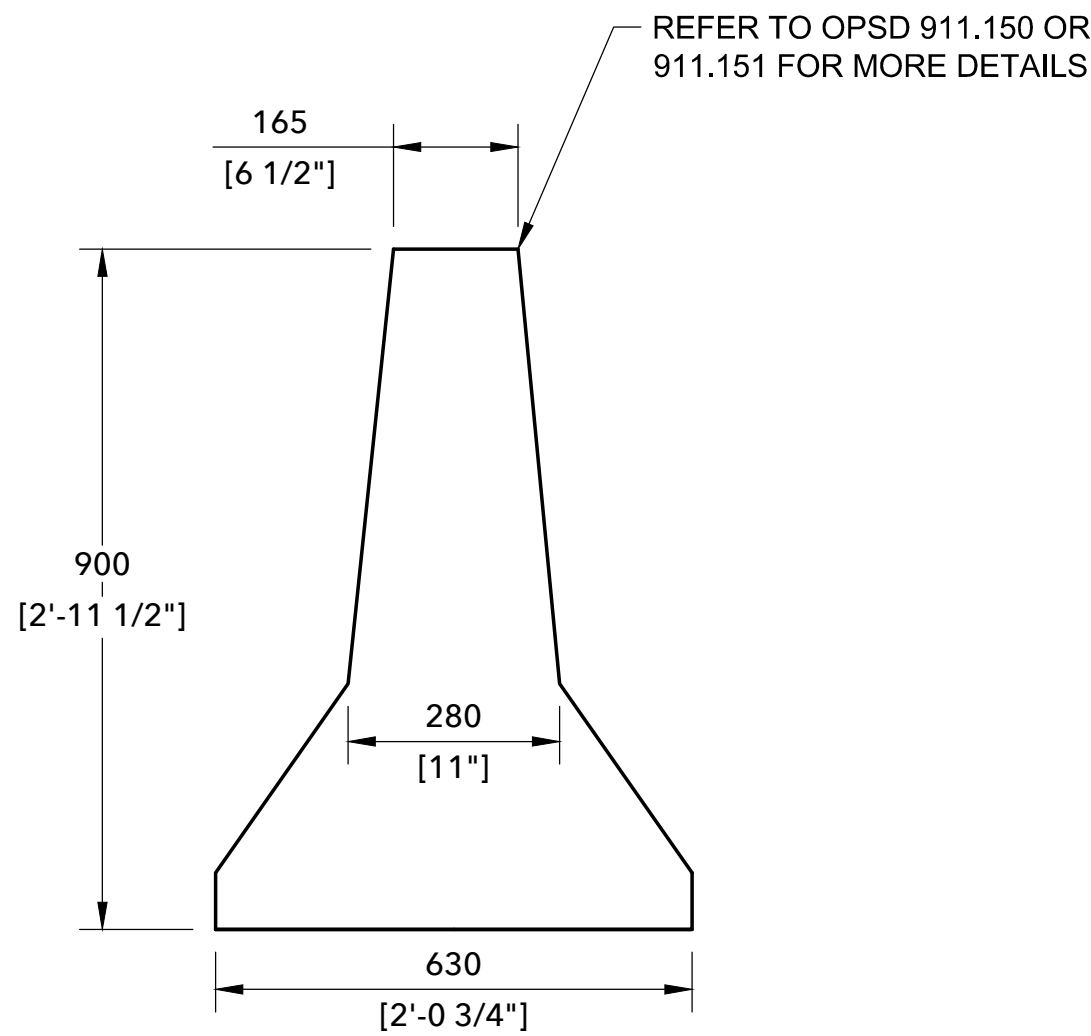


TEMPORARY CONCRETE BARRIER (TCB) ELEVATION

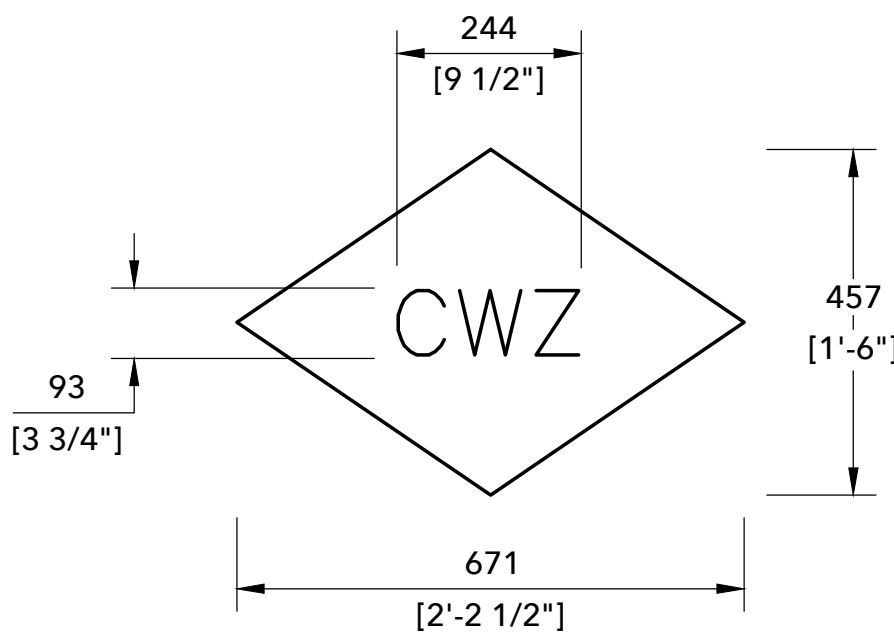

CWZ LOGO DETAILS

GENERAL NOTES:

- CWZ FENCING SHALL HAVE NAVY BLUE FABRIC, 4FT IN HEIGHT (3'8" NOMINAL), WITH 90% BLOCKAGE.
- CWZ FENCING SHALL HAVE THE CWZ LOGO STAMPED OR PRINTED TWO TIMES PER 50' OF LENGTH.
- CWZ FENCING SHALL BE PROVIDED IN ACCORDANCE WITH METROLINX GEI MODULE 4, SECTION 4.4.
- TCBs SHALL BE PROVIDED IN ACCORDANCE WITH OPSD 911.150 OR 911.151.
- ALTERNATIVE BARRIERS MAY BE INSTALLED IN ACCORDANCE TO METROLINX GEI MODULE 4, SECTION 4.5.
- FOR CURVED TRACK, CWZ OFFSET MUST TAKE INTO CONSIDERATION CURVATURE AND SUPERELEVATION AS SHOWN IN STANDARD PLAN GTS-3004 SHEET 1.

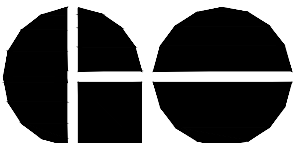METRIC CONVERSION: 1 inch=25.4mm, 1 foot=304.8mm			
1	25/08/08	REVISED TCB OFFSET FROM TRACK AND HEIGHT OF FENCE	
0	25/04/30	INITIAL VERSION ESTABLISHED	
No.	Date	Revision	By Approved
Standard/ CONTINUOUS WORK ZONE FENCING WITH TEMPORARY CONCRETE BARRIERS			
Drawn	NA	Checked MD	Approved By <i>Bob Lee</i> -- Director, Engineering -- Track
		 METROLINX	
Date	AUGUST 8, 2025	Plan Number	GTS-3006 Rev 1
REFERENCE: GTS-3004			Sheet 1 OF 1